

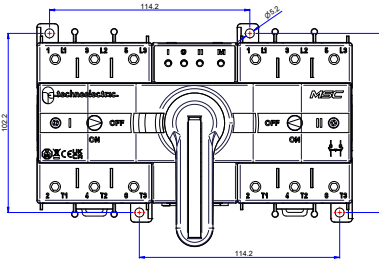




# MSC

## *THE SMALLEST MOTORIZED CHANGEOVER ON THE MARKET*

- 01** Overall Dimensions  
(less than 18 cm on the DIN rail)
- 02** High Making and Breaking Capacity  
(160 A AC 23A, 200A AC 22A)
- 03** Available in 3 sizes: 125 A, 160 A, 200 A
- 04** Suitable for cables till 70mm<sup>2</sup>  
(95mm<sup>2</sup> with adaptors)
- 05** Simple Logic
- 06** UL Certified
- 07** Suitable for Naval Applications
- 08** Works with flat DIN rails
- 09** Works with aluminium cables



Caratteristiche tecniche <i>technical features</i>	Tipo <i>type</i>	SD3			
		In	A	125	160
Tensione nominale d'isolamento <i>Rated insulation voltage</i>	UI	V	1500	1500	1500
Tensione nominale tenuta impulso <i>Shock resistance</i>	Uimp	kV	8	8	8
AC. 23A/B	415V	A	125	160	160
	500V	A	125	160	160
	690V	A	125	160	160
Corrente di breve durata per 1 sec <i>Short-circuit withstand current 1 sec</i>	400V	kA	3	3	3
Potere di chiusura in corto circuito <i>Short-circuit making capacity</i>	400V	kA	4,5	4,5	4,5
Durata meccanica <i>Mechanical endurance</i>		n.	10000	10000	10000
Durata elettrica <i>Electrical endurance</i>		n.	6000	6000	6000
Potenza dissipata per polo <i>Power loss per pole</i>		W	2,5	3	3
Dimensione cavo <i>Cable section</i>		mm <sup>2</sup>	70	70	70