

Renewable energy solution



LS[▶]**ELECTRIC**

vector
Energy

FUTURING SMART ENERGY

We open up a brighter future through efficient and convenient energy solutions.



LS a leader of the electric power and automation industry, offers smart convergence solutions by combining ICT and DC technology.
Smart Power Transmission Solutions / Smart Power Distribution Solutions Smart Automation Solutions

Renewable Energy is key factor to reduce green home gas emissions for the next generation



CONTENTS

Summary 04


DC Components

DC MCCB	12
DC Switch-Disconnecter	22
DC Compact Switch-Disconnecter	26
DC Air Circuit Breakers	30
High Voltage DC Relay	32
DC MCB	38
DC FUSE	40
DC Contactor	42
SPD	44

AC Components

Susol MCCB	48
Susol MCCB up to 1000Vac	54
Susol ACB	56
Susol ACB up to 1150Vac	58
Susol Compact ACB	62
Susol VCB	68
Metasol Contactor	72
XGIPAM	82
Susol RMU	83
Transformer	89

Products for Photovoltaic Power Generation

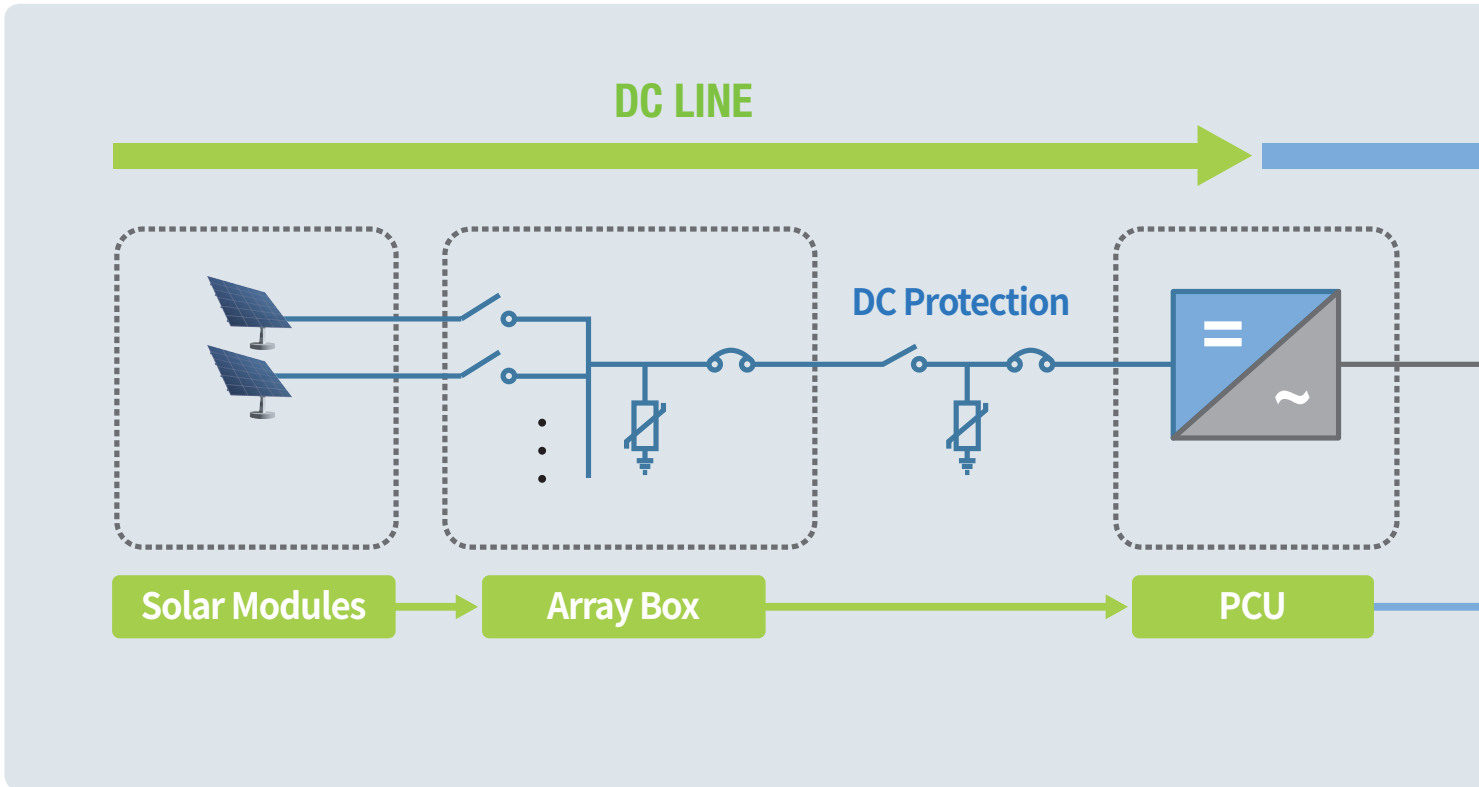

P.12 DC MCCB



TD/TSD/UTD Type

- In ~800A/~250A(320A)/~550A
- Ue DC1000V/1500V/1500V
- Icu 100kA/50kA(20kA)/50kA

P.18 Switch Disconnecter



TS1600NA

- In 1000~1600A
- Ue DC 1150V
- Icw 25kA 1s

P.22 Switch Disconnecter



DDH/DDV/DDX

- In 800~4000AF
- Ue DC 750~1800V
- Icw 100kA 1s

P.26 Compact Switch Disconnecter



Compact DDH/DDV

- In 800~1600AF
- Ue DC 750~1500V
- Icw 50kA 1s

P.42 DC Contactor



MD-30a, 60a, 100a

- Ie 120, 100, 60, 35A
- Ue DC 125,250,500V,1000V
- DC-2~5, DC-1 ratings
- 3.7kW~22kW

P.32 High Voltage DC Relay



GPR010~GPR-H600-A

- Ie 10~600A
- Ue 450~1500V

P.44 DC SPD



BK20S-DC1500

- Un DC 110~1500V
- Up ≤1.0~4.5kV
- I_{max} 40kA
- t_a <25ns


P.38 DC MCB




BK63H-DC



- In 1~63A
- Ue DC 250~1000V
- Icu 10kA



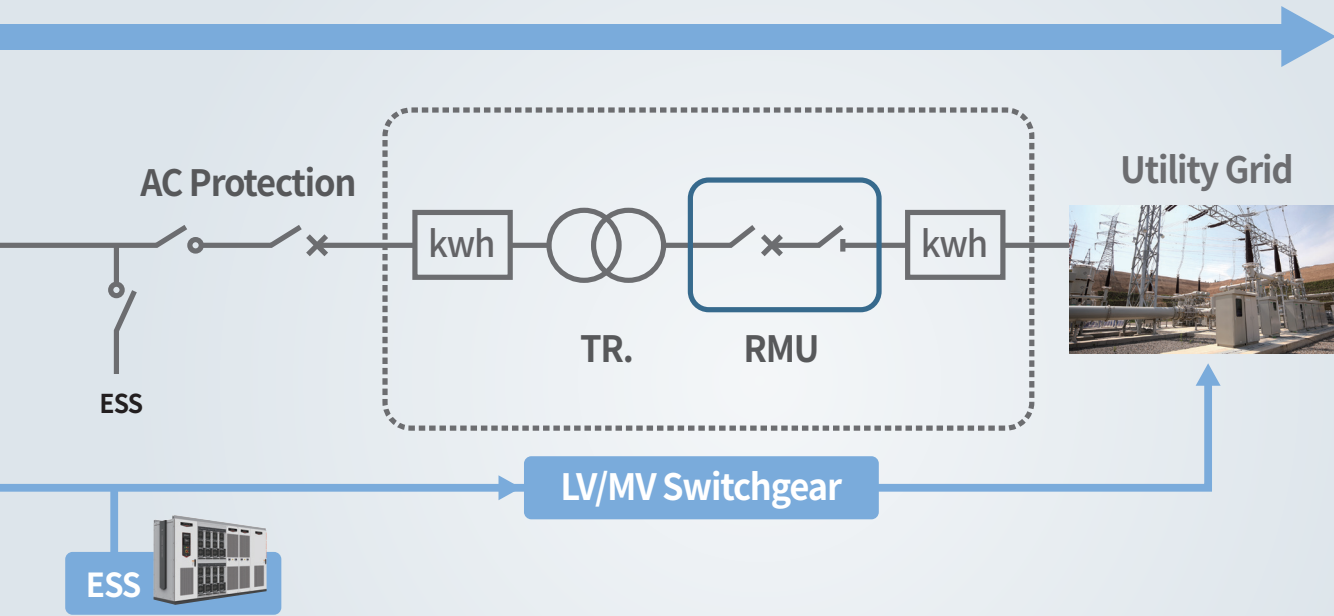

AC LINE

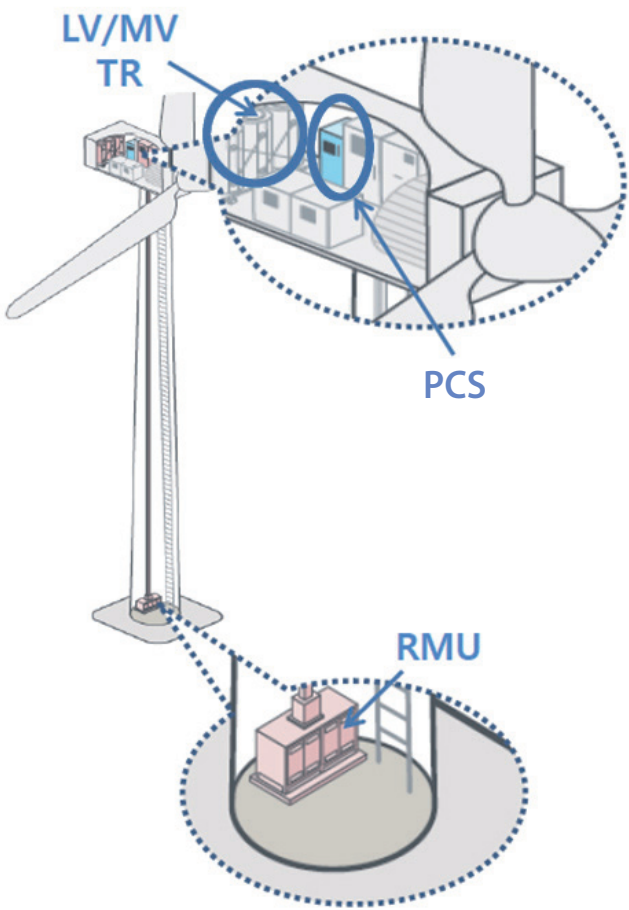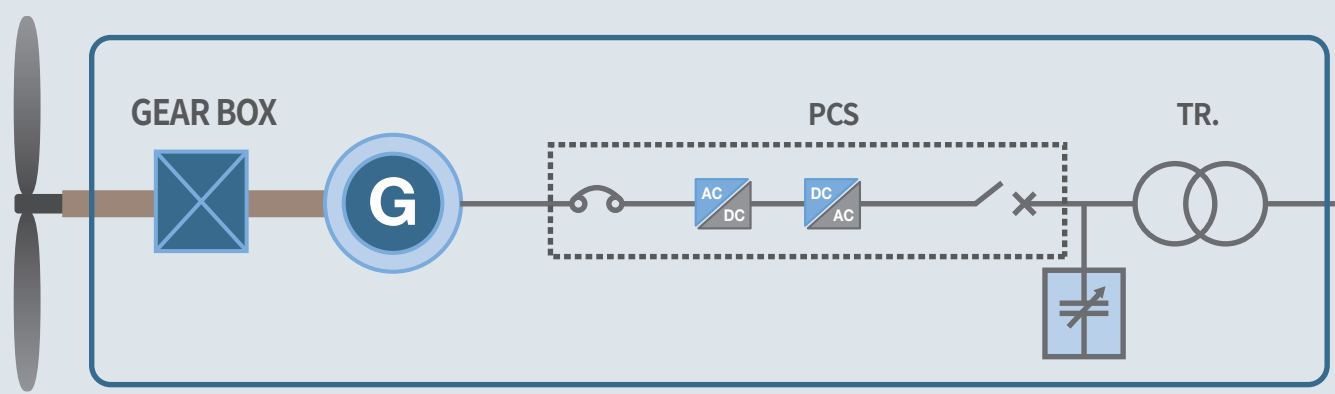


<p>P.50 MCCB</p>  <p>TS1000~1600 <ul style="list-style-type: none"> In 1000~1600A Icu 50~150kA AC 380/415V </p> <p>UTV250 <ul style="list-style-type: none"> In 60~250A AC 690/800V 1000V </p>	<p>P.75 Contactors</p>  <p>MC-1260a, 2650a <ul style="list-style-type: none"> Ie 1260~2650A Ue AC 1000V Coil: AC 100~240V DC 100~220V </p>	<p>P.89 Cast Resin TR</p>  <ul style="list-style-type: none"> Rated Power - Up to 25MVA Rated Voltage - Primary: Up to 36kV - Secondary: Up to 1200V 	<p>P.83 RMU</p>  <ul style="list-style-type: none"> Rated Voltage: Up to 36kV Ir: 630A Isc 21kA/3s M1/E3 IAC AFAL 21kA/0.5s
<p>P.56 ACB(AH-Type) P.58 ACB(AV-Type)</p>  <p>AH <ul style="list-style-type: none"> In 630~6300A Icu 65~150kA Ue up to 690Vac </p> <p>AV <ul style="list-style-type: none"> In 630~4000A Icu 30~50kA Ue up to 1150Vac </p>	<p>P.82 XGIPAM</p>  <ul style="list-style-type: none"> XGIPAM Bay, F, M, T, DG PT : 110V, CT : 5A, ZCT : 1.5mA AC110V, DC110~125V 	<p>P.91 Oil Immersed TR.</p>  <ul style="list-style-type: none"> Rated Power - Up to 80MVA Rated Voltage - Up to 72kV 	<p>P.83 Packaged Solution</p>  <p>RMU+TR+LV</p>  <p>RMU+TR+PCU</p>

Products for Grid Protection of Wind Power



P.50 MCCB	P.56 ACB
	
TS1000~1600 <ul style="list-style-type: none"> ■ In 1000~1600A ■ Icu 50~150kA ■ AC 380/415V 	UTV250 <ul style="list-style-type: none"> ■ In 60~250A ■ AC 690/800V 1000V
P.42 DC Contactor	P.58 ACB
	
MD-30a, 60a, 100a <ul style="list-style-type: none"> ■ Ie 120, 100, 60, 35A ■ Ue DC 125,250,500V,1000V ■ DC-2~5, DC-1 ratings ■ 3.7kW~22kW 	1150Vac ACB <ul style="list-style-type: none"> ■ In 630~4000AF ■ Ue ~1150Vac ■ Icu 30~50kA

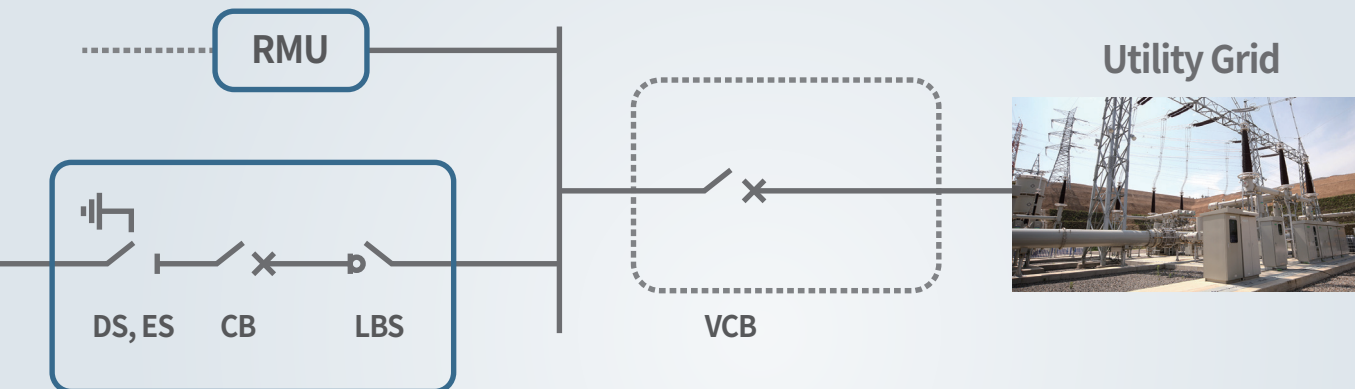

P.89 Cast Resin TR.



- Rated Power
 - Up to 25MVA
- Rated Voltage
 - Primary: Up to 36kV
 - Secondary: Up to 1200V

P.83 RMU



- Rated Voltage: Up to 36kV
- Ir: 630A
- Isc 21kA/3s
- M1/E3
- IAC AFAL 21kA/0.5s

P.68 VCB



- VL~25**
- Ir: 630A/24kV
 - Breaking current: 25kA
 - M2/E2/C2

P.91 Oil Immersed TR.



- Rated Power
 - Up to 80MVA
- Rated Voltage
 - Up to 72kV

- CSS (RMU+TR+LV)




P.69 CB Compartment



- Ir: 630A/24kV
- Breaking current: 25kA
- M2/E2/C2

Products for Energy Storage System

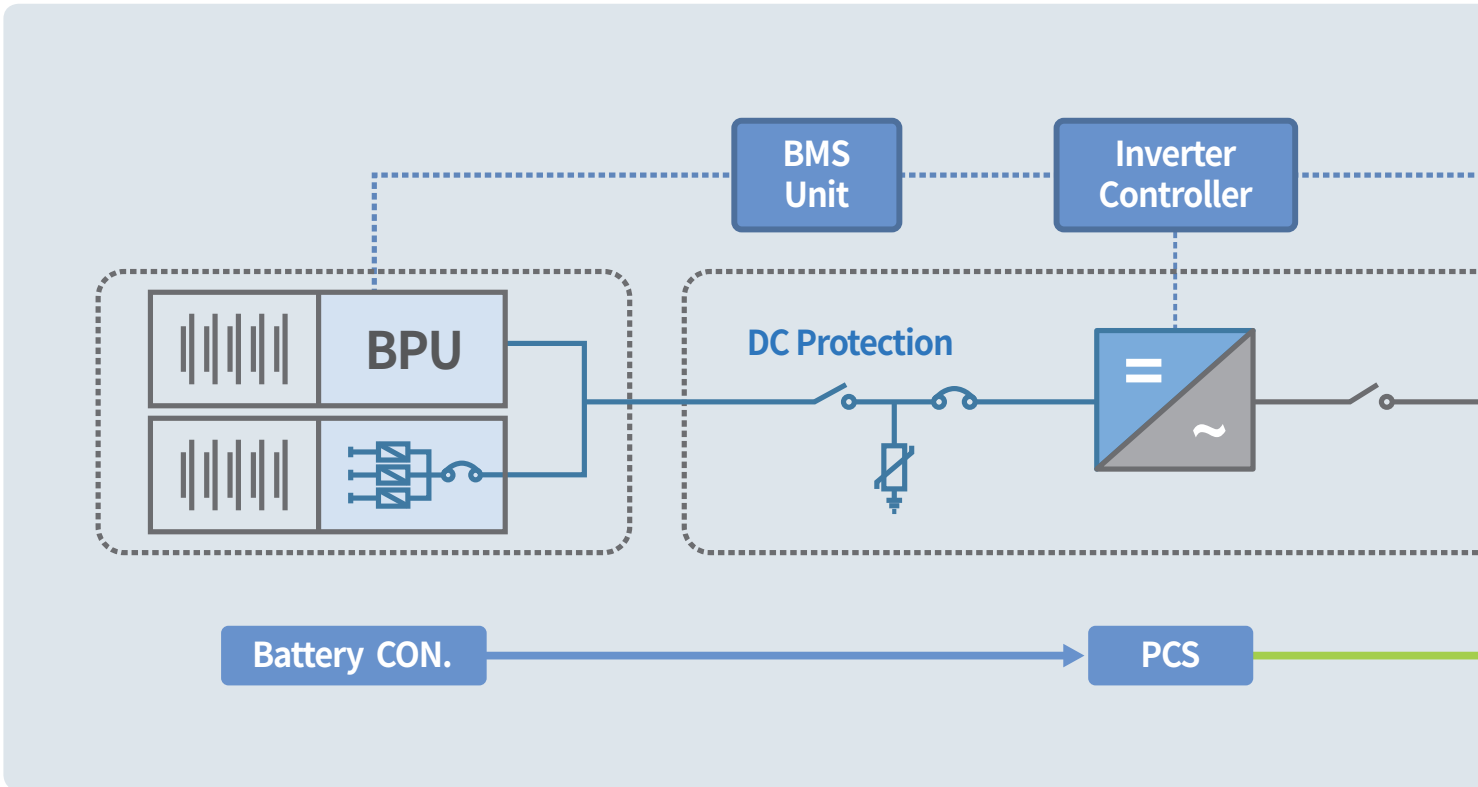

P.12 DC MCCB



TD/TSD/UTD Type

- In ~800A/~250A(320A)/~550A
- Ue DC1000V/1500V/1500V
- Icu 100kA/50kA(20kA)/50kA

P.42 DC Contactor



MD-30a,60a,100a

- Ie 120, 100, 60, 35A
- Ue DC 125, 250, 500V, 1000V
- DC-2~5, DC-1 ratings
- 3.7kW~22kW

P.22 Switch Disconnecter



DDH/DDV/DDX

- In 800~4000AF
- Ue DC 750~1800V
- Icw 100kA 1s

P.26 Compact Switch Disconnecter



Compact DDH/DDV

- In 800~1600AF
- Ue DC 750~1500V
- Icw 50kA 1s

P.32 High Voltage DC Relay



P.44 DC SPD




GPR010~GPR-H600-A

- Ie 10~600A
- Ue 450~1500V

BK20S-DC1500

- Un DC 110~1500V
- Up ≤1.0~4.5kV
- Imax 40kA
- ta <25ns

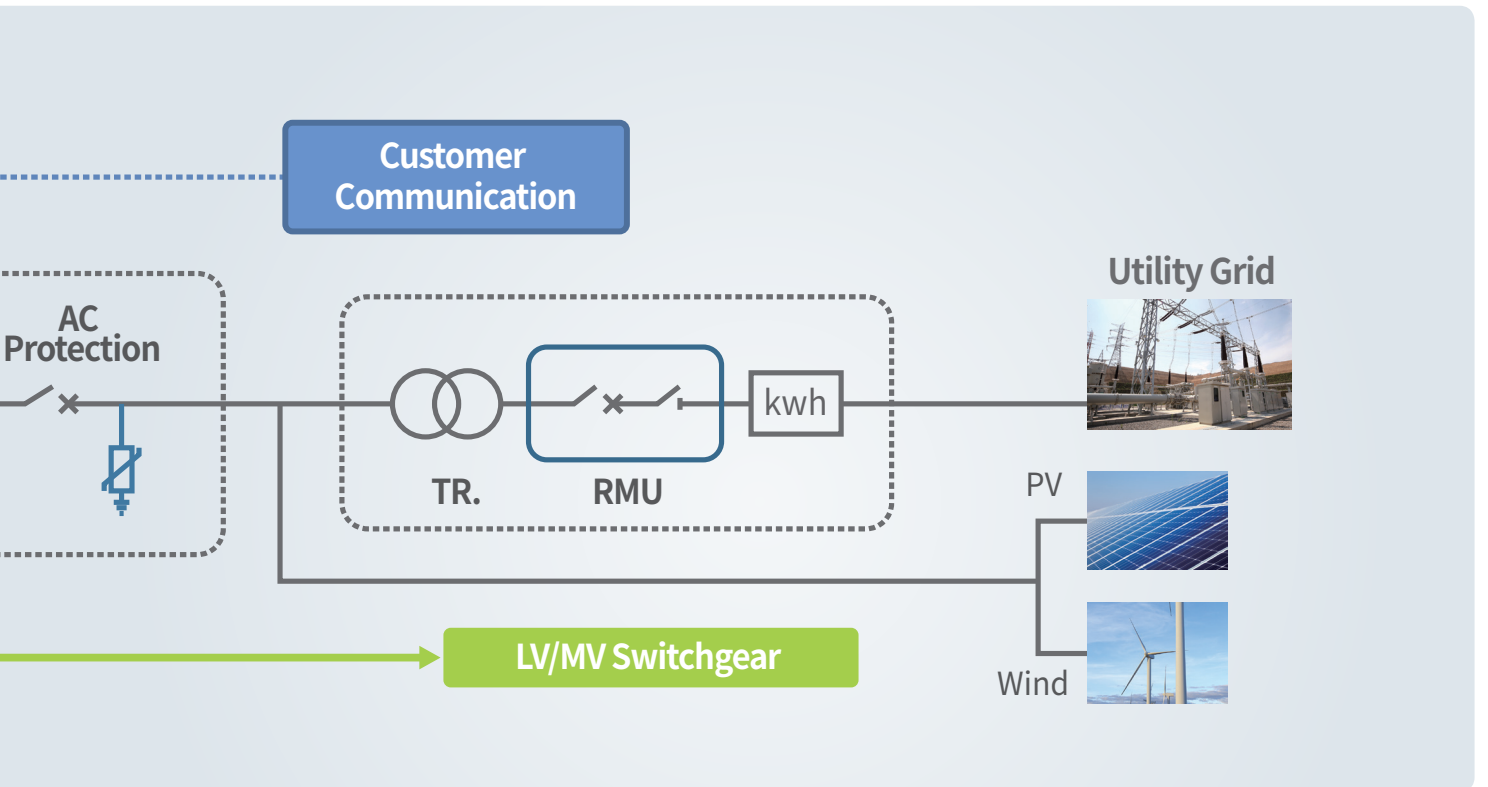

P.50 MCCB



- TS1000~1600**
- In 1000~1600A
 - Icu 50~150kA
 - AC 380/415V
- UTV250**
- In 60~250A
 - AC 690/800V 1000V

P.75 Contactor



- MC-1260a, 2650a**
- Ie 1260~2650A
 - Ue AC 1000V
 - Coil: AC 100~240V DC 100~220V

P.89 Cast Resin TR.



- Rated Power - Up to 25MVA
- Rated Voltage - Primary: Up to 36kV - Secondary: Up to 1200V

P.56 ACB



- AH**
- In 630~6300A
 - Icu 65~150kA
 - Ue up to 690Vac

P.83 RMU



- Rated Voltage: Up to 36kV
- Ir: 630A
- Isc 21kA/3s
- M1/E3
- IAC AFAL 21kA/0.5s

P.91 Oil Immersed TR.



- Rated Power - Up to 80MVA
- Rated Voltage - Up to 72kV

P.68 VCB



- VL~25**
- Ir: 630A/24kV
 - Breaking current: 25kA
 - M2/E2/C2

P.82 XGIPAM



- XGIPAM Bay, F, M, T, DG
- PT : 110V, CT : 5A, ZCT : 1.5mA
- AC110V, DC110~125V

Susol

Super Solution

Metasol

Meta Solution



DC Components

You can count on us.

Global leader that puts customer values as the highest priority

We promise to return the best value for our customers. Committed to develop global leading products, we endeavor to expand overseas market as well as domestic market. Join us where you can share bright future.

DC MCCB	12
DC Switch-Disconnecter	22
DC Compact Switch-Disconnecter	26
DC Air Circuit Breakers	30
High Voltage DC Relay	32
DC MCB	38
DC FUSE	40
DC Contactor	42
SPD	44

DC MCCB (100~800AF)

- Susol MCCB is suitable for DC application such as Photovoltaic Circuit Breaker, UPS and datacenter
- DC short circuit test tested by VDE
- Higher nominal voltage range up to 1000 VDC
- Rated Current : 16A~800A
- No of Pole: 2/3/4Pole




Rating

Model		TD100	TD160	TS100	TS160	TS250	TS400	TS630	TS800
Frame size	(AF)	100	160	100	160	250	400	630	800
Rated current, I _n	(A)	16, 20, 25, 32, 40, 50, 63, 80, 100	100, 125, 160	40, 50, 63, 80, 100	100, 125, 160	125, 160 200, 250	300, 400	500, 550	700 ^{Note 5)} , 800
No. of poles	(Pole)	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4
Rated operational voltage, U _e (Vdc)	2Pole	500	500	500	500	500	500	500	500
	3Pole	750	750	750	750	750	750	750	750
	4Pole	1000	1000	1000	1000	1000	1000	1000	1000
Rated insulation voltage, U _i (V)	2Pole	800	800	800	800	800	800	800	800
	3Pole	800	800	800	800	800	800	800	800
	4Pole	1000	1000	1000	1000	1000	1000	1000	1000
Rated impulse withstand voltage U _{imp} (kV)		8	8	8	8	8	8	8	8
Rated ultimate short-circuit breaking capacity, I _{cu} (kA)	Type	H	H	H	H	H	H	H	H
Rated service breaking capacity, I _{cs} [%I _{cu}]	500VDC (2P)	40	40	40	40	40	40	40	40
	750VDC (3P)	40	40	40	40	40	40	40	40
Trip Unit ^{Note 4)} Function	1000VDC (4P)	40	40	40	40	40	40	40	40
	FTU	●	●	●	●	●	●	●	●
	FMU	●	●	●	●	●	●	●	●
	ATU	-	-	-	●	●	●	●	●

Note)


1. TD100/TD160 is the same Construction Frame.
2. TS100/TS160/TS250 is the same Construction Frame.
3. TS400/TS630 is the same Construction Frame.
4. Trip Unit Function have 3 Types (FTU/FMU/ATU)
 - FTU : Fixed thermal, fixed magnetic unit
 - FMU : Adjustable thermal, fixed magnetic unit
 - ATU : Adjustable thermal, adjustable magnetic unit
 (Not applicable to TS160 100A ATU)
5. 700A is only available for TS800FTU
6. 4Pole type MCCB is 4P4T.

DC Exemplary circuit diagrams

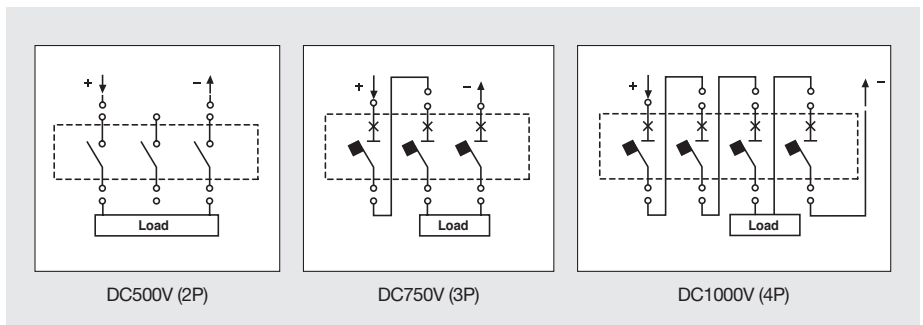


Connection method by DC voltage

Operating voltage (DC)	Center point Connected to earth (A)	One pole connected to earth (B)	Insulated from Earth (C)
~250V	A	A	A
~500V	A	B, C	A
~750V	F	C, E	B
~1000V	F	D	E, F

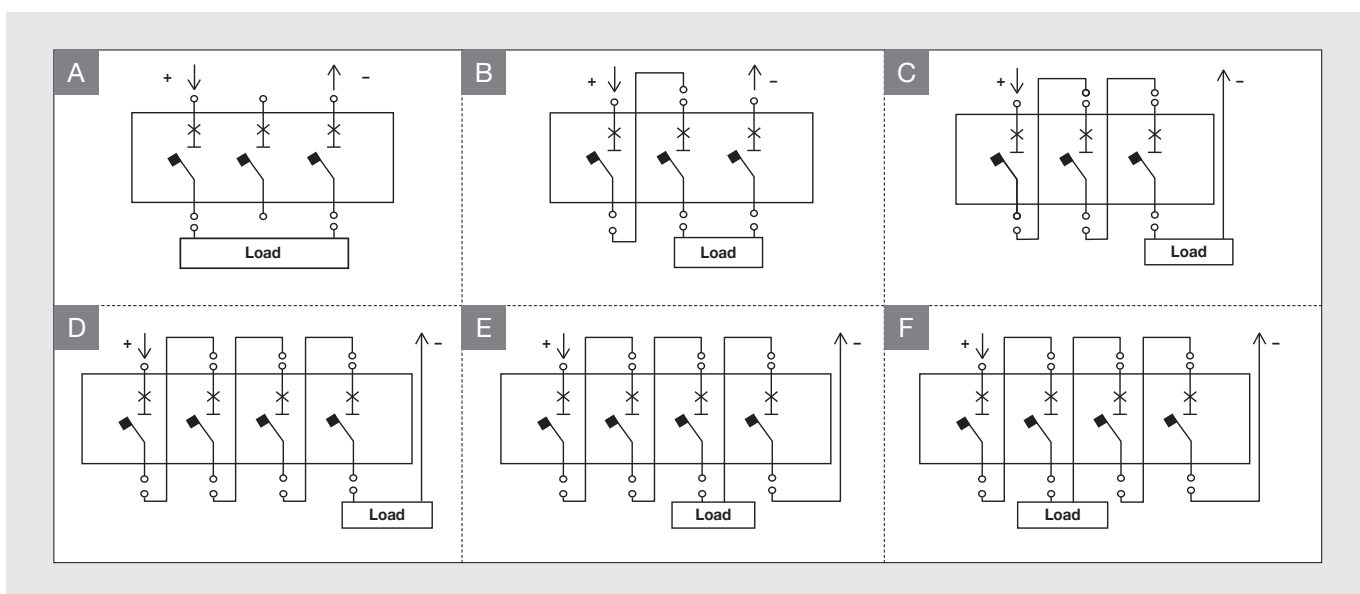

※ Application of 4P4D product when applying 4-pole product

Operating voltage (DC)	Center point Connected to earth (A)	One pole connected to earth (B)	Insulated from Earth (C)
~250V	A1	A1	A1
~500V	A1	B1, C1	A1
~750V	F1	C1, E1	B1
~1000V	F1	D1	E1, F1

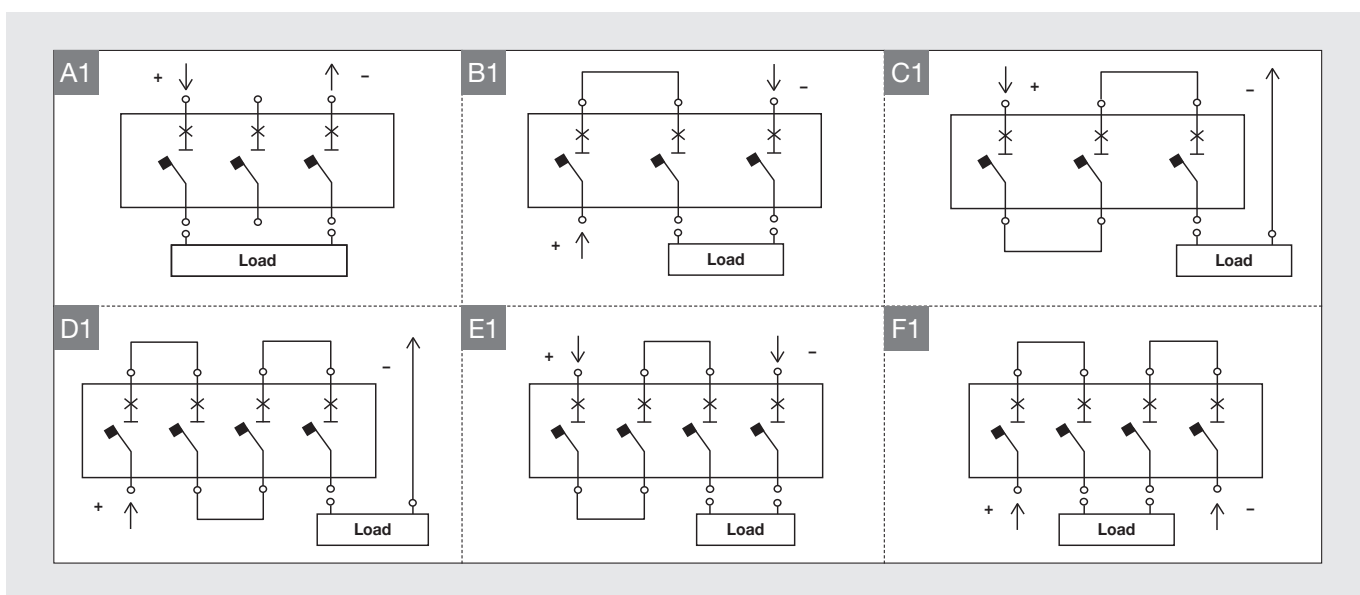

※ Application of 4P4D product when applying 4-pole product

DC MCCB (DC 1000/1500V)

Characteristics

- Applications such as photovoltaic (PV) power generation, UPS and data center.
- Compact size implemented
- Maximum breaking capacity
- Nominal voltage ranges up to 1000/1500Vdc
- Rated current: 63~250A
- No. of poles: 2/4pole



Rating

AF		250AF			
Type		N-Type	N-Type	H-Type	NA-Type
Model		TSD250N	TSD250N	TSD250H	TSD250NA
Pole		2P	4P		
Rated current, In		63**, 80, 100, 125, 160, 200, 250A			200, 250A
Rated operational voltage, Ue		DC 1000V	DC 1500V		
Rated insulation voltage, Ui		DC 1000V	DC 1500V		
Rated impulse withstand voltage, Uimp		8kV			
Rated short-circuit breaking capacity, Icu		20kA	20kA	50kA	Icw* 3kA, Icm* 3kA
Ics = % Icu		100			-
Category		A			
Type of trip unit		Thermal-Magnetic			-
Current range	Fixed (Ir)	1 × In			-
Magnetic trip range	Fixed (Ii)	6 × In			-
Life cycle (time)	Mechanical	10,000			
	Electrical	2,000			1,000
Dimension (W×H×D, mm)		76×170×92	140×170×92		
Standards		IEC/EN60947-2, GB14048.2			IEC60947-3 & Annex D(For PV) GB/T14048.3
Certification		CCC, CB			

* Icw: Rated short-circuit withstand current(kA), 1s

Icm: Rated short-circuit making capacity(kA)

** 63A Magnetic trip range: 8×In

Temperature derating

Type	Rated Current (A)		Derating Current (A)		Compensated rated current in accordance with ambient temperature (A)								Terminal Connection		
	2P	4P	100%	90%	40°C		45°C		50°C		60°C			70°C	
TSD250	63	63	100%	90%	63	100%	62	98%	60	95%	56	89%	52	83%	TSD250 BUSBAR 5T
	80	80	100%	90%	80	100%	78	98%	76	95%	71	89%	66	83%	
	100	100	100%	90%	100	100%	98	98%	95	95%	89	89%	83	83%	
	125	125	100%	90%	125	100%	122	98%	119	95%	111	89%	104	83%	
	160	160	100%	90%	160	100%	155	97%	150	94%	141	88%	131	82%	
	200	200	100%	90%	200	100%	196	98%	190	95%	178	89%	166	83%	
	250	250	100%	90%	250	100%	243	97%	235	94%	220	88%	205	82%	


* Load-side terminal cover using derating current applied to 90%

Altitude derating


Altitude (m)	Ue (Vdc)			250AF
	2P	4P	Compensation constant	
2000	1000V	1500V	1.00	100%
3000	870V	1300V	0.87	98%
4000	770V	1150V	0.77	93%
5000	670V	1000V	0.67	90%

* Exclusive codes required for MOP order


Exclusive external accessories

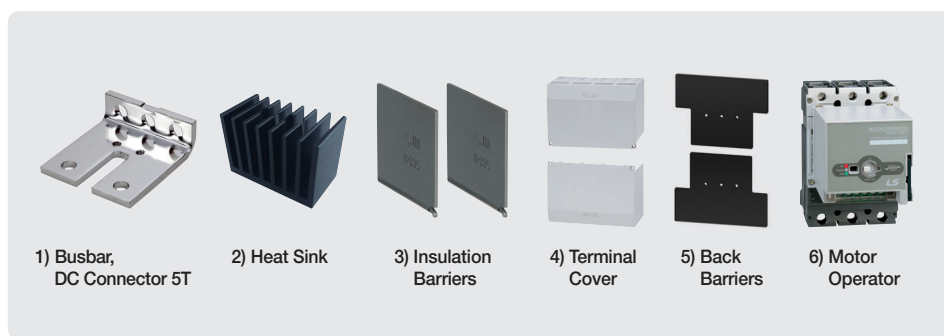


Possible configuration of electrical auxiliaries




UVT



SHT




AX



AL

Maximum possibilities

Phase	Accessory	TSD250
R (Left)	AX	1
	AL	1
	SHT, UVT	1
T (Right)	AX	1
	AL	-

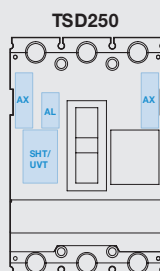

TSD250

Note) 1. The internal accessories are assembled together with the product, so be careful when ordering.
 2. SHT / UVT can not be used simultaneously

UL DC MCCB(DC 1500V)

Characteristics

- Applications such as photovoltaic (PV) power generation, UPS and data center.
- Compact size implemented
- Maximum breaking capacity
- Nominal voltage ranges up to DC 1500V
- Rated current: UL489-60~550A
UL489B - 40~450A
- Applicable standard: Acquired IEC/UL Dual standard




Rating


FRAME	UTD250			UTD400			UTD600		
Rated voltage	1500 Vdc			1500 Vdc			1500 Vdc		
Rated current	60, 80, 100, 150, 200, 250A			275, 300, 400A			450, 500, 550A		
	40, 60, 80, 100, 150, 200A			250, 275A			300, 400, 450A		
Number of poles	4			4			4		
Breaker type	E	N	H	E	N	H	E	N	H
UL489 BPS/UL489B PV	UTD250			UTD400			UTD600		
Interrupting capacity (kA) UL, CSA	20	50	65	20	50	65	20	50	65
IEC60947-2	UTD250			UTD400			UTD600		
Ultimate breaking capacity (kA) DC, Icu	20	40	50	20	40	50	20	40	50
Service cut-off current (kA) DC, Ics	= 1ms(Annex P)			= 1ms(Annex P)			= 1ms(Annex P)		
	= 10ms			= 10ms			= 10ms		
Insulation voltage, Ui	1500 Vdc			1500 Vdc			1500 Vdc		
Impulse withstand voltage, Uimp	8 kV			8 kV			8 kV		
Utilization Ccategory	A			A			A		
IEC60947-3	UTD250			UTD400			UTD600		
Insulation voltage, Ui	1500 Vdc			1500 Vdc			1500 Vdc		
Impulse withstand voltage, Uimp	8 kV			8 kV			8 kV		
Rated short-time withstand current (Icw)	3 kA			4 kA			5 kA		
Utilization category	DC23A, DC-PV2			DC23A, DC-PV2			DC23A, DC-PV2		
Trip Units	UL489	UL489B	UL489	UL489B	UL489	UL489B	UL489	UL489B	
	60~250A	40~200A	275~400A	250, 275A	450~550A	300~450A	450~550A	300~450A	
	60~250A	60~200A	275~400A	275A	450~550A	300~450A	450~550A	300~450A	
	250A	200A	400A	275A	550A	450A	550A	450A	
	250A		400A		600A				
Unit mounted	●			●			●		
Mechanical lugs	●			●			●		
Control wire terminal kit	●			●			●		
Motor operator (MOP)	●			●			●		
Terminal cover	●			●			●		
Insulation barriers	●			●			●		
Shunt trip (SHT)	●			●			●		
Undervoltage trip (UVT)	●			●			●		
Auxiliary switch (AX)	●			●			●		
Alarm switch (AL)	●			●			●		
External handle/Direct connection type	●			●			●		
External handle/Extended type	●			●			●		
Padlock attachment	●			●			●		
Weight(approximate), lbs.(kg)	6.08(2.76)			15.41(6.99)			15.43(7)		
Dimensions Inches(mm)	W	H	D	W	H	D	W	H	D
	5.51(140)	7.87(200)	3.62(92)	7.34(186.5)	11.42(290)	4.33(110)	7.34(186.5)	13.39(340)	4.33(110)

* FTU, FMU : UL489, UL489B, IEC 60947-2
 ** UL 489, UL 489B Only
 *** IEC 60947-3 Only

External configuration

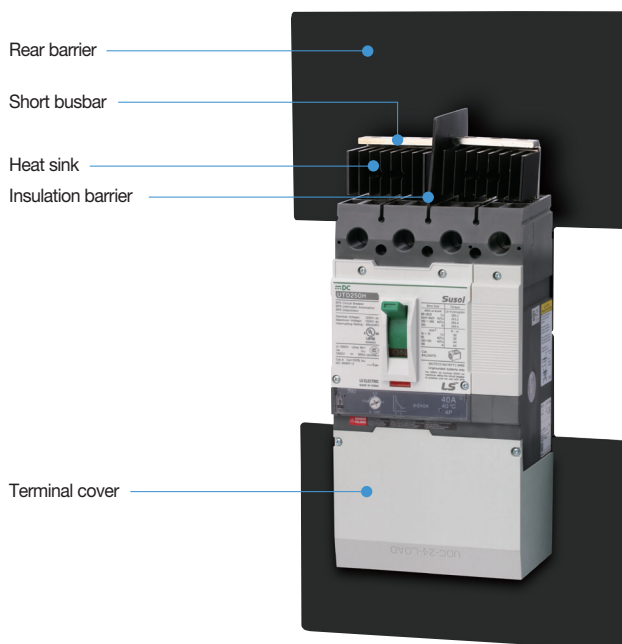

Exclusive external accessories

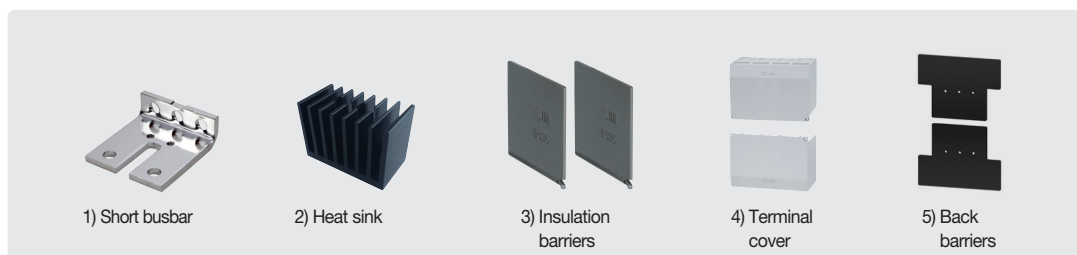

Accessories Assembly Quantity

Accessories	Grounded system		Ungrounded system		Item code	Remarks
	Qty	Unit	Qty	Unit		
Short busbar	3	Set	2	Set	83261172113	UTD250, 40~200A, 1set
					83261172112	UTD250, 250A, 1set
					83261173650	UTD400/600, 250~500A, 1set
					83261173651	UTD400/600, 550A~600A, 1set
Insulation barriers	3	ea	4	ea	-	Included in spare part of MCCB or MCS
Terminal cover (Line)	1	ea	1	ea	83261172111	UTD250
Terminal cover (Load)	1	ea	1	ea	83261173557	UTD400/600
Insulation barrier (1ea)	2	ea	2	ea		

Note) For 400A ungrounded system, order MCCB or MCS, 83261173650 x2 and 83261173557 x1

Possible configuration of electrical auxiliaries

Frame	Internal accessories	Kinds	Left	Right
UTD250		AX	1	1
		AL	1	-
		SHT	1*	-
		UVT	1*	-
UTD400 UTD600		AX	3	-
		AL	-	1
		SHT	1*	-
		UVT	1*	-

* Only one type can be installed in a designated place

DC MCCB (1600AF)

Characteristics

- DC 750V (DC MCCB)
- 1000/1250/1600A DC
- $U_{imp} = 8kV$
- 3Pole
- IEC60947-2




Rating


Model		TS1000N TM	TS1250N TM	TS1600N TM
Frame size		1000	1250	1600
Pole		3	3	3
Rated current, I_n (A)	-5~45	1000	1250	1600
	50	970	1210	1550
	65	880	1100	1410
Rated insulation voltage, (V)	U_i	1000	1000	1000
Rated impulse withstand voltage, (kV)	U_{imp}	8	8	8
Rated operational voltage, (V)	U_e	DC	750	750
Rated short-circuit breaking capacity, (kA)	I_{cu}	750Vdc	40	40
		600Vdc	40	40
IEC60947-2		500Vdc	60	60
Rated service breaking capacity, (kA)	I_{cs}	% I_{cu}	100	100
Isolation behavior		●	●	●
Category		A	A	A
Trip characteristic		6In, 10In		
Life cycle (time)	Mechanical	2500	2500	2500
	Electrical	500	500	500
Pollution degree		3	3	3
Dimension (mm)	W×H×D	327×210×152.5		
Weight (kg)		12.5		
Reference standard		IEC60947-2		

Accessories

1) TS1000/1250N TM DC
Order number: 70223472601(1set)



<Busbar>




<Heat sink>

2) TS1600N TM DC
Order number: 70223472602(1set)




<Busbar>




<Heat sink>

Characteristic curve

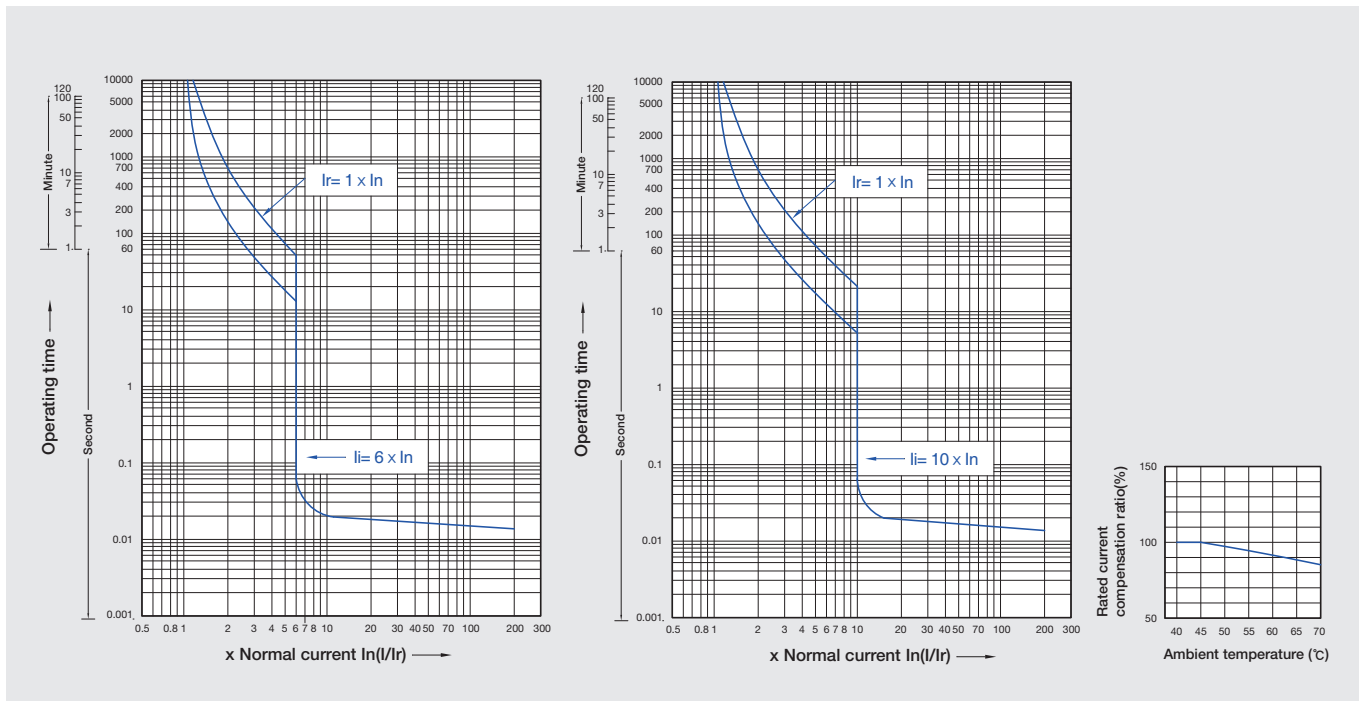

Dimensions

(unit: mm)

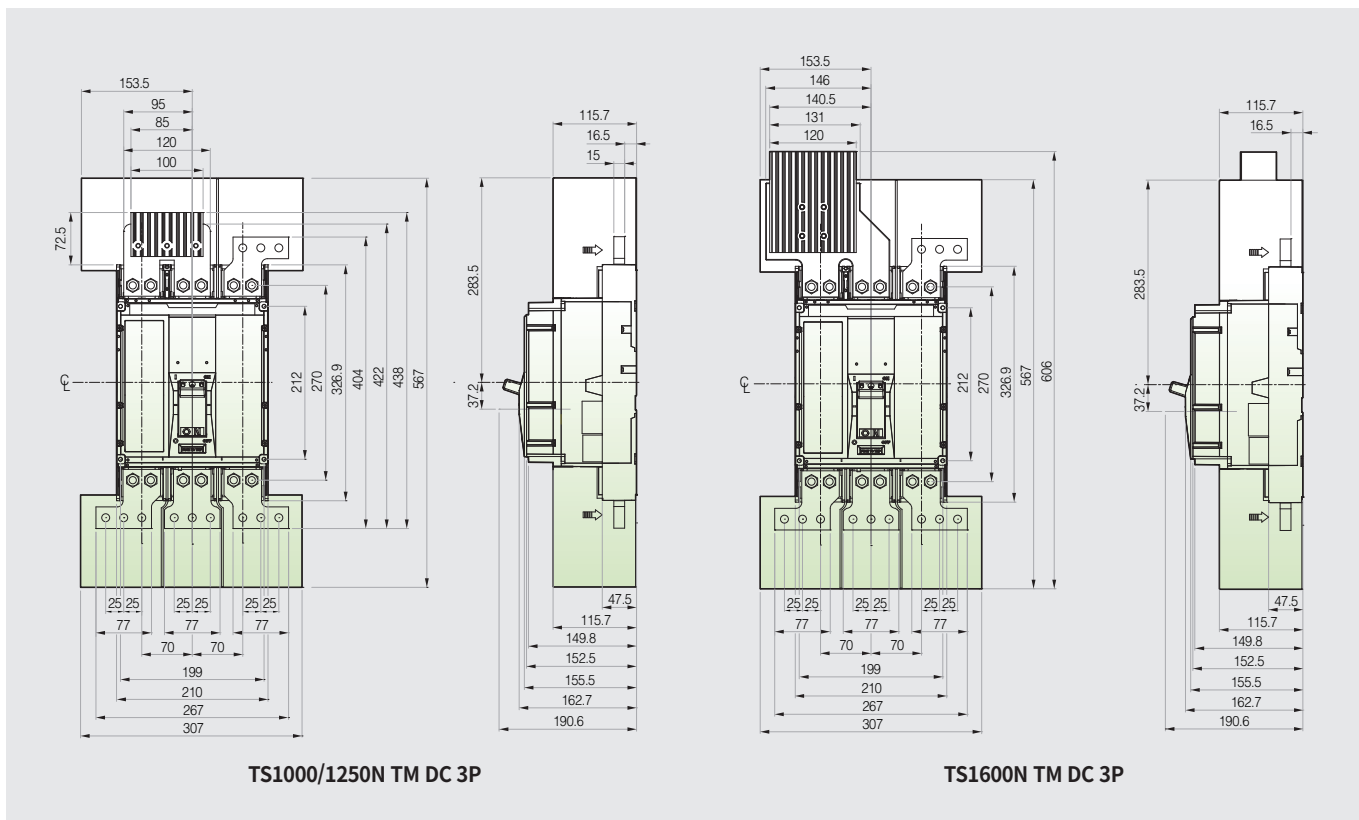


DC Switch-Disconnecter (1600AF)

1600AF Switch-Disconnectors

Characteristics

- 4Pole: DC1150V/AC690V Switch disconnectors
- 3Pole: DC900V/AC690V Switch disconnectors
- 1000/1250/1600A DC
- Uimp = 8kV
- IEC60947-3

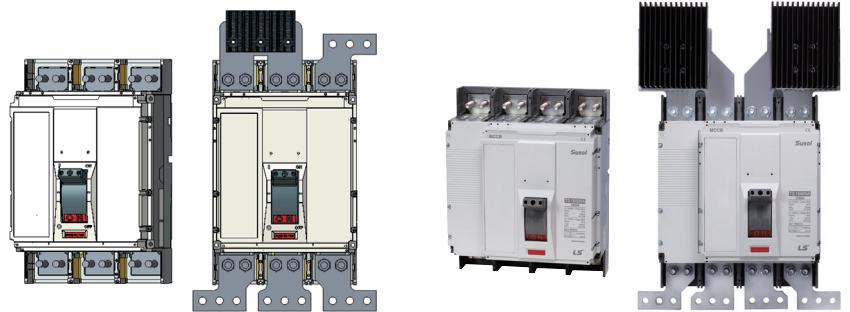

(TS1250NA 3P)

(TS1600NA 4P)

Rating


Type		TS1000NA	TS1250NA	TS1600NA
Frame size	[AF]	1000	1250	1600
Conventional thermal current, I _{th}	[A]	1000	1250	1600
Rated operational current, I _e	[A]	1000	1250	1600
No. of poles	[Pole]	3/4	3/4	3/4
Rated operational voltage, U _e	DC/AC 3pole [V]	900/690	900/690	900/690
	DC/AC 4pole [V]	1150/690	1150/690	1150/690
Rated insulation voltage, U _i	DC [V]	1150	1150	1150
	AC [V]	1000	1000	1000
Rated impulse withstand voltage, U _{imp}	[kV]	8	8	8
Rated short-circuit making capacity, I _{cm}	DC [kA peak]	25	25	25
	AC [kA peak]	52.5	52.5	52.5
Rated short-circuit making capacity, I _{cw}	1sec [kA rms]	25	25	25
Utilization category		DC22B/AC23B	DC22B/AC23B	DC22B/AC23B
Isolation behavior		●	●	●
Trip unit (Release)	Disconnecter unit DSU	●	●	●
Connection	Fixed	Front-connection	●	●
		Rear-connection	●	●
Mechanical life	[Operations]	10000	10000	10000
Electrical life	@ V DC [Operations]	500	500	500
	@ 690V AC [Operations]	2000	2000	2000
Dimensions without accessories, W×H×D (Front connection)	3pole [mm]	210×327×152.5	210×327×152.5	210×327×152.5
	4pole [mm]	280×327×152.5	280×327×152.5	280×327×152.5
Weight without accessories (Front connection)	3pole [kg]	12	12	12
	4pole [kg]	17.8	17.8	17.8
Reference standard		IEC60947-3	IEC60947-3	IEC60947-3

Accessories


1) For TS1000NA DC

2) For TS1250NA DC


3) For TS1600NA DC



<Busbar>




<Busbar>



<Heatsink>



<Busbar>






<Heatsink>


Dimensions

TS1600NA




Dimension of MCCB with DC BUSBAR

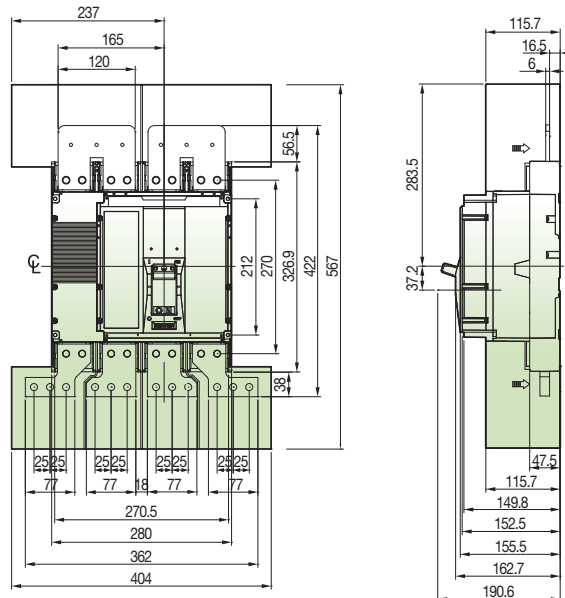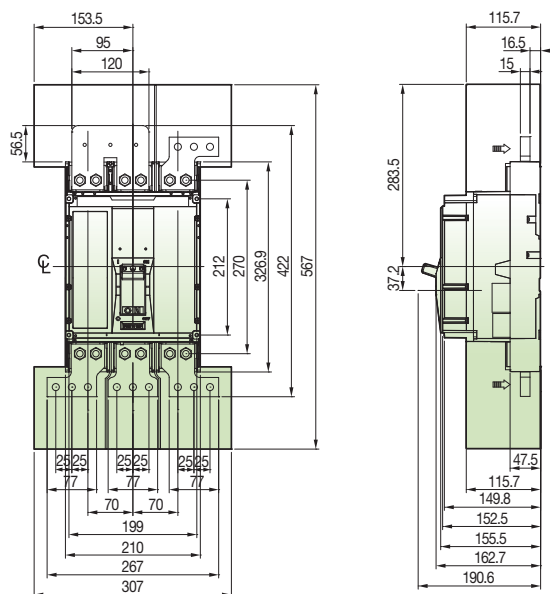


<TS1000NA 3P>

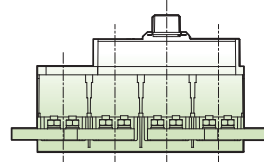

<TS1000NA 4P>

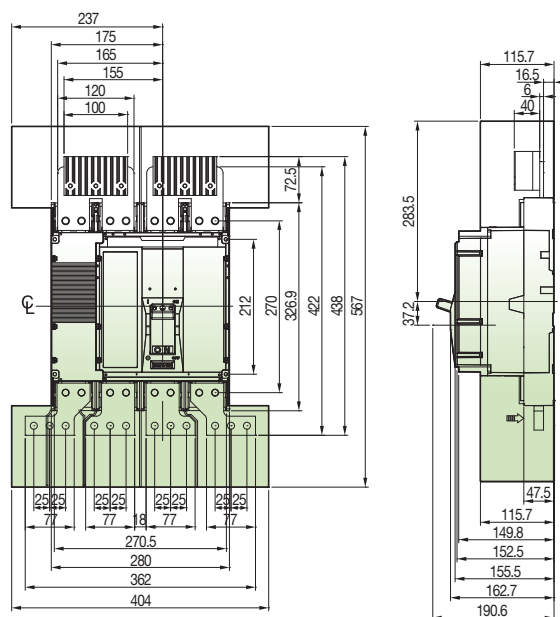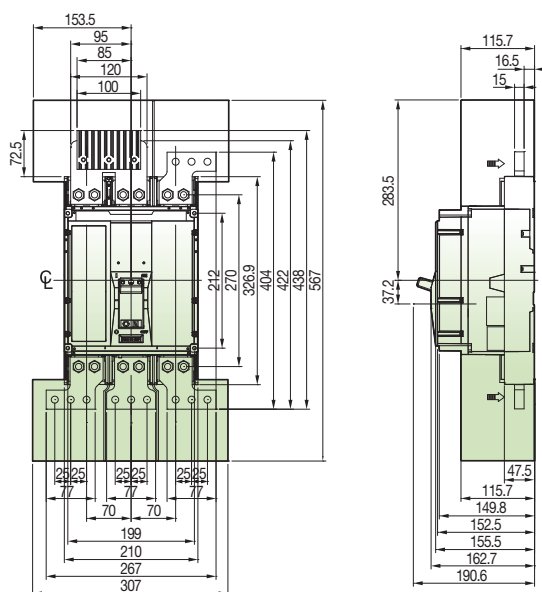

<TS1250NA 3P>

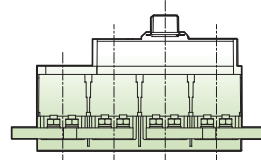

<TS1250NA 4P>

DC Switch-Disconnecter

- Basic rating
 - Rated voltage: 1500Vdc (DDV type), 1200Vdc (DDH type), 1800Vdc (DDX type)
 - Rated current: 800 ~ 4000A - I_{cw} = 100kA / 1s
 - Utilization Category: DC-23A
- Electrical endurance:
 - 10,000 operations (1600A @ 1500Vdc)
 - 2,000 operations (4000A @ 1500Vdc)
- Optional Short-Busbar considering temperature performance
- Compatible with existing Susol ACB
 - Accessories including closing and trip coils
 - Physical sizes for installation
- Applicable standards and tests: IEC 60947-3, DEKRA CB, UL listed certification



Type and ratings


Specification	
Rated insulation voltage (U _i)	(Vdc)
Rated impulse withstand voltage (U _{imp})	(kV)
Rated short-time withstand current (I _{cw})	(kA/1s)
Rated making capacity (I _{cm})	(kA, peak)
Operation time (ms)	Opening
	Closing
Version	Draw-out type
	Fixed type
Standard certification	
DC 1200V	
Type	
Frame size	(AF)
Rated operational voltage (U _e)	3Pole
	4Pole
Utilization category (according to IEC 60947-3)	
Endurance (times) (Without maintenance)	Mechanical
	Electrical
	Time const 2ms
DC 1500V	
Type	
Frame size	(AF)
Rated operational voltage (U _e)	3Pole
	4Pole
Utilization category (according to IEC 60947-3)	
Endurance (times) (Without maintenance)	Mechanical
	Electrical ²⁾
	Time const 7.5ms
	Time const 2ms
DC 1800V	
Type	
Frame size	(AF)
Rated operational voltage (U _e)	3Pole
	4Pole
Utilization category (according to IEC 60947-3)	
Endurance (times) (Without maintenance)	Mechanical
	Electrical ²⁾
	Time const 2ms
Demension and weight	
Weight (3P/4P) (kg)	Without cradle
	Draw-out type
	Fixed type
External dimensions (H×W×D) (mm)	Draw-out type
	Fixed type

Electrical characteristics													
DDH/DDV-20D					DDH/DDV-40E					DDX-40E			
1500					1500					1800			
12					12					12			
100 ¹⁾					100					100			
100					100					100			
Less than 25ms under I _{cw} /Less than 75ms over I _{cw}					Less than 25ms under I _{cw} /Less than 75ms over I _{cw}					Max. 40			
80ms under					80ms under					Max. 80			
●					●					●			
●					●					●			
DEKRA CB certification according to IEC 60947-3					DEKRA CB certification according to IEC 60947-3					PT&T Test Report according to IEC 60947-3			
DDH													
DDH-08D	DDH-10D	DDH-13D	DDH-16D	DDH-20D	DDH-08E	DDH-10E	DDH-13E	DDH-16E	DDH-20E	DDH-25E	DDH-32E	DDH-40E	DDH-40E
800	1000	1250	1600	2000	800	1000	1250	1600	2000	2500	3200	4000	4000
750					750					750			
1200					1200					1200			
DC-22A					DC-22A					DC-22A			
20,000					15,000					15,000			
6,000	5,000	2,500	1,500	1,000	3,000			2,000		1,000			
DDV													
DDV-08D	DDV-10D	DDV-13D	DDV-16D	DDV-20D	DDV-25D	DDV-08E	DDV-10E	DDV-13E	DDV-16E	DDV-20E	DDV-25E	DDV-32E	DDV-40E
800	1000	1250	1600	2000	2500	800	1000	1250	1600	2000	2500	3200	4000
1000 (1200V) ²⁾					1000 (1200V) ²⁾					1000 (1200V) ²⁾			
1500					1500					1500			
DC-23A					DC-23A					DC-23A			
20,000					15,000					15,000			
-	-	-	-	-	-	5,000			4,000	2,500	1,500	1,000	
9,000	6,000	4,000	2,000	1,500	1,000	10,000			8,000	5,000	3,000	2,000	
DDX													
DDX-08E	DDX-10E	DDX-13E	DDX-16E	DDX-20E	DDX-25E	DDX-32E	DDX-40E	DDX-40E	DDX-40E	DDX-40E	DDX-40E	DDX-40E	DDX-40E
800	1000	1250	1600	2000	2500	3200	4000	4000	4000	4000	4000	4000	4000
1000 (1200V) ¹⁾					1000 (1200V) ¹⁾					1000 (1200V) ¹⁾			
1800					1800					1800			
DC-22A					DC-22A					DC-22A			
15,000					15,000					15,000			
10,000	8,000	5,000	3,000	2,000	1,000	800	500	500	500	500	500	500	500
DDH/DDV-20D					DDH/DDV/DDX-40E								
34/42					37/45					43/53			
63/74					70/85					87/103			
34/44					38/47					44/55			
430×334(419)×375					430×334(419)×375					430×412(527)×375			
300×300(385)×295					300×300(385)×295					300×378(493)×295			

¹⁾ DDV 3Pole models can be used up to DC 1200V, but if the voltage exceeds DC 1000V, please contact us.
²⁾ Since Utilization category DC-22A is applied, it can not be used for DC circuit with time constant exceeding 2ms.


Connection diagram of DC ACB

DDH	500V	750V	1200V
DDV	500V	1000V	1500V

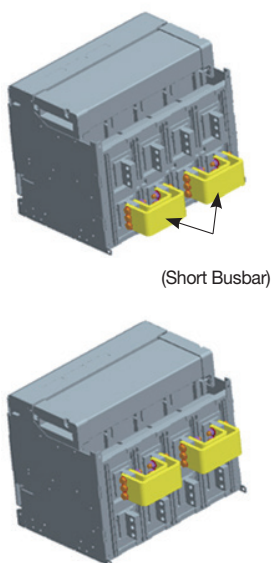

Upper supply

Lower supply

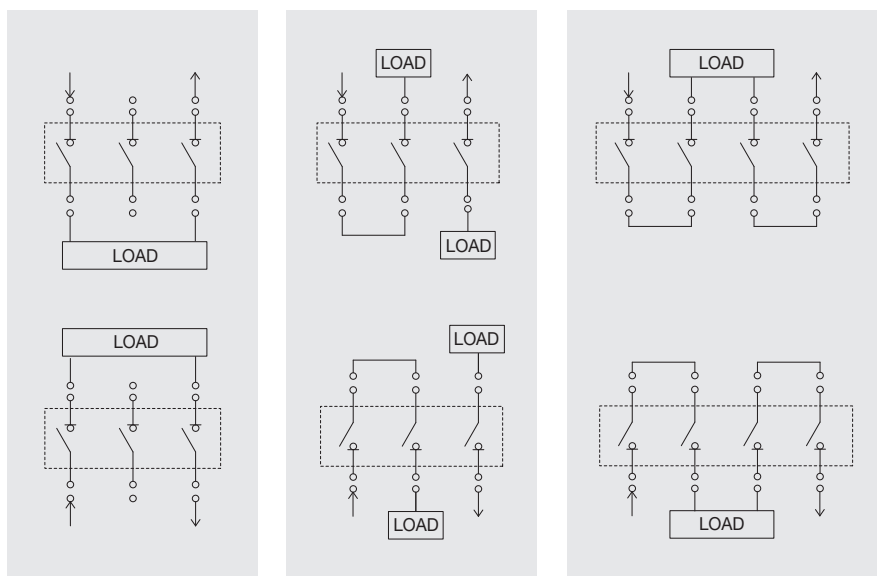

※ Refer to the following page for product dimensions with short busbar.

Composition of short busbar

1. Short busbars can be ordered as shown in the table below, or customer have to make short busbars in accordance with the specified short busbars according to AF.
2. The tightening torque for assembling short busbars is 40~50N.m

Type	AF	Qty. of code	Aspects	Parts (3P)
DDH DDV	E : ~3200AF	70223464603 3P : 1ea 4P : 2ea		Short busbars : 75mm×10T×2ea Bolt : M12×60, 6ea Nut : M12, 6ea Spring washer, Plain washer
DDH DDV	E : 4000AF	70223464604 3P : 1ea 4P : 2ea		Short busbars : 125mm×10T×3ea Bolt : M12×80, 6ea Nut : M12, 6ea Spring washer, Plain washer
DDH DDV	D : 1600AF	70223461600 3P : 1ea 4P : 2ea		Short busbars : 135mm×100mm×10T×1ea (L type) Bolt : M12×45, 4ea Nut : M12, 4ea Spring washer, Plain washer
DDH DDV	D : 2000AF	70223461601 3P : 1ea 4P : 2ea		Short busbars : 135mm×100mm×10T×1ea (L type) Bolt : M12×45, 4ea Nut : M12, 4ea Spring washer, Plain washer, Heat sink
DDV	D : 2500AF	70223461602 3P : 1ea 4P : 2ea		Short busbars : 125mm×10T×1ea Bolt : M12×45, 6ea Nut : M12, 6ea Spring washer, Plain washer, Heat sink

UL DC Switch-Disconnecter




Brand		Susol												
Rated nominal voltage	Vdc	DC 1250 V (4P) / DC 800 V (3P)												
Rated maximum voltage	Vdc	DC 1500 V (4P) / DC 1000 V (3P)												
Poles	(P)	4P / 3P												
Version		Fixed / Draw-out												
Standard		UL 489B, UL 489F												
Type		UDA-08D	UDA-10D	UDA-13D	UDA-16D	UDA-20D	UDA-25D	UDA-08E	UDA-16E	UDA-20E	UDA-25E	UDA-32E	UDA-40E	
Ampere frame	(AF)	800	1000	1250	1600	2000	2500	800	1600	2000	2500	3200	4000	
Short circuit withstand current	(kA)	85						100						
Operating time (ms)	Max. opening time	40ms												
	Max. closing time	80ms under												
Lift cycle (times)	Mechanical	12,500												
	Electrical	3500	2500	1500	1000	600	400	10000	8000	5000	3000	2000		
Weight lb (kg)	Draw-out type	Main body with cradle	3P	154 (70)			165 (75)	214 (97)			245 (111)	326 (148)		
			4P	187 (85)			201 (91)	269(122)			309 (140)	414 (188)		
		Only cradle	3P	71 (32)			82 (37)	99(45)			123 (56)	205 (93)		
			4P	84 (38)			97 (44)	121(55)			152 (69)	256 (116)		
	Fixed type	Motor charging type	3P	77 (35)			90 (41)	101 (46)			110 (50)	196 (89)		
			4P	99 (45)			112 (51)	126 (57)			137 (62)	249 (113)		
External dimensions Inches (mm)	Draw-out type	H×W×D	3P	16.93 × 13.15 × 16.02 (430 × 334 × 407)						16.93 × 16.22 × 16.02 (430 × 412 × 407)				
			4P	16.93 × 16.5 × 16.02 (430 × 419 × 407)						16.93 × 20.75 × 16.02 (430 × 527 × 407)				
	Fixed type	H×W×D	3P	11.81 × 11.81 × 11.61 (300 × 300 × 295)						11.81 × 14.88 × 11.61 (300 × 378 × 295)				
			4P	11.81 × 15.16 × 11.61 (300 × 385 × 295)						11.81 × 19.41 × 11.61 (300 × 493 × 295)				
Enclosure dimensions Inches (mm)	H×W×D	3P	19.69 × 15.75 × 13.39 (500 × 400 × 340)						19.69 × 19.69 × 13.39 (500 × 500 × 340)					
		4P	19.69 × 19.69 × 13.39 (500 × 500 × 340)						19.69 × 24.21 × 13.39 (500 × 615 × 340)					



Note 1) External dimensions are excluded external terminal.
 Note 2) UL certificate(UL489B/F) is listed on UL site.

Connection type

Upper supply

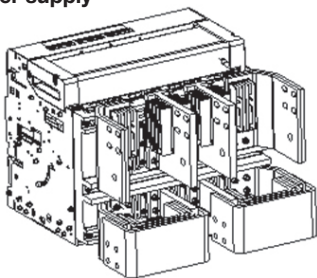

Lower supply

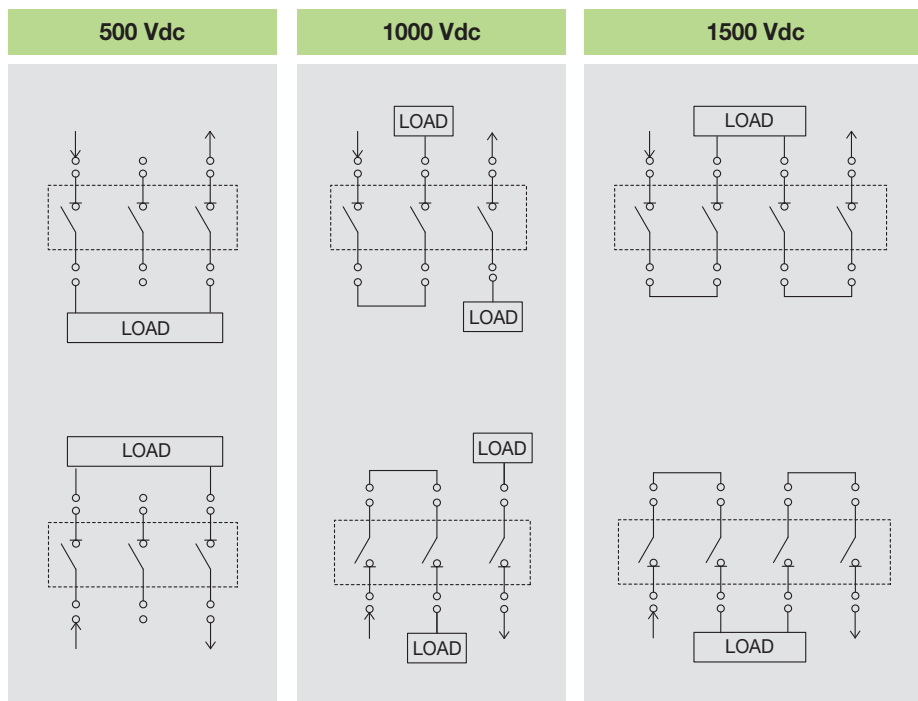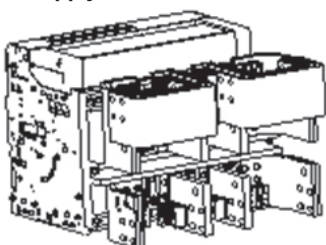

Note) If you set up connections not involved in the instruction above, ask the LS technical team.

Specification

Type	AF	Ordering number	3D configuration	Configuration
UDA series	D: 2000AF	70223466502 3P : 1 ea 4P : 2 ea		Short busbar: 140mm × 10T × 2ea Bolt: M12 × 55, 8ea Nut: M12, 8ea Spring washer, Plain washer, Heat sink
	D: 2500AF	70223466500 3P : 1 ea 4P : 2 ea		Short busbar: 125mm × 12T × 1ea Bolt: M12 × 45, 8ea Nut: M12, 8ea Spring washer, Plain washer, Heat sink
	E: 2500AF	70223467601 3P : 1 ea 4P : 2 ea		Short busbar: 75mm × 10T × 2ea Bolt: M12 × 50 × 4ea Nut: M12, 4ea Spring washer, Plain washer
	E: 3200AF	70223467602 3P : 1 ea 4P : 2 ea		Short busbar: 75mm × 10T × 2ea Bolt: M12 × 50 × 4ea Nut: M12, 4ea Spring washer, Plain washer
	E: 4000AF	70223467603 3P : 1 ea 4P : 2 ea		Short busbar: 125mm × 10T × 3ea Spacer busbar: 125mm × 10T × 2ea Bolt: M12 × 50 × 8ea Nut: M12, 4ea Spring washer, Plain washer

DC Compact Switch-Disconnecter

- Rated current 800 ~ 1600A
- Rated operational voltage:
 - DDH type (3P: 750Vdc, 4P: 1200Vdc)
 - DDV type (3P: 1000Vdc, 4P: 1500Vdc)
- Rated short-time current (I_{cw}): 50kA/1s
- Operation durability without maintenance: 12,500 times
- Various control power sources
- Various accessories
- Application Standards and Certification: IEC 60947-3 (DEKRA CB certification), GB 14048.3 (CCC certification)



Fixed type




Drawable type


Type and ratings

Commonness															
Rated insulation voltage (U _i)	(V)	1500													
Rated impulse withstand voltage (U _{imp})	(kV)	12													
Rated operational voltage (U _e)	(V)	750V DC (3P), 1200V DC (4P)				750V DC (2P)				1000V DC (3P), 1500V DC (4P)					
Number of poles	(P)	3, 4				2				3, 4					
Installation type		Fixed / Draw-out				Fixed				Fixed / Draw-out					
Related standards		IEC 60947-3 (DEKRA CB certification), GB 14048.3 (CCC certification)				IEC 60947-3				IEC 60947-3 (DEKRA CB certification), GB 14048.3 (CCC certification)					
Type		DDH				DDV				DDV					
		DDH-08C	DDH-10C	DDH-13C	DDH-16C	DDV-08C	DDV-10C	DDV-13C	DDV-16C	DDV-08C	DDV-10C	DDV-13C	DDV-16C		
Ampere frame (AF)		800AF	1000AF	1250AF	1600AF	800AF	1000AF	1250AF	1600AF	800AF	1000AF	1250AF	1600AF		
Utilization category (According to IEC 60947-3)		DC-22A				DC-22A				DC-23A					
Rated making capacity (I _{cm})	(kA peak) DC	50				50				50					
Rated short-time withstand current (I _{cw})	(kA/1s) DC	50				50				50					
Operation time (ms)	Opening time	Less than 25ms under I _{cw} /Less than 75ms over I _{cw}													
	Closing time	80ms under													
Connection	Horizontal type	○				○				○					
	Vertical type	● (Default)				● (Default)				● (Default)					
Mechanical and electrical life cycle															
Endurance (times) (Without maintenance)	Mechanical (120 times/hr)	12,500													
	Electrical (L/R 2ms) (30 times/hr)	2,000	1,000	500	500	2,000	1,000	500	500	4,000	2,000	1,000	1,000		
Dimension and weight															
Weight (3P/4P)	Draw-out	Without cradle		15.5(3P) / 19(4P)				-				15.5(3P) / 19(4P)			
		With cradle		22(3P) / 26(4P)				-				22(3P) / 26(4P)			
	Fixed		15.5(3P) / 19(4P)				14(2P)				15.5(3P) / 19(4P)				
External dimensions (W×H×D)	(mm)	Draw-out		361.3×267×255.4(3P), 361.3×267×326(4P)				-				361.3×267×255.4(3P), 361.3×267×326(4P)			
		Fixed		283×219.5×272.4(3P), 283×219.5×342.4(4P)				283×219.5×272.4(2P)				283×219.5×272.4(3P), 283×219.5×342.4(4P)			

Product connection

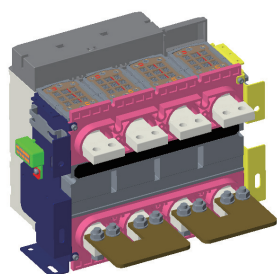

Upper Supply

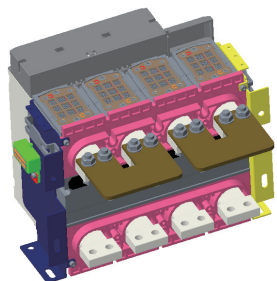

Lower Supply

Operation voltage and connection diagram of DC ACB series

Poles	3P	3P	4P
DDH type	500 Vdc	750 Vdc	1200 Vdc
DDV type	500 Vdc	1000 Vdc	1500 Vdc
Connection diagram			

Note) If different circuit configurations are needed, please contact LS.

Type	Rated current	Busbar connection	Order code	Edifice	Order quantity	Weight (kg/set)
Fixed / Draw-out type	800-1600A	Vertical / Horizontal	70223472600	Short busbar : 1ea/unit, Heatsink : 1ea/unit M10 Bolt Set : 4ea/unit, M6 Bolt : 4ea/unit M4 Screw : 1ea/unit	3P : 1 unit	2kg/unit
					4P : 2 unit	
Fixed type	800-1000A	Front	70223472603	Short busbar : 1ea/unit M10 Nut Set : 4ea/unit	3P : 1 unit	0.6kg/unit
					4P : 2 unit	
	1250A		70223472601	Short busbar : 1ea/unit, Heatsink : 1ea/unit M10 Nut Set : 4ea/unit, M6 Bolt : 2ea/unit	3P : 1 unit	0.7kg/unit
	4P : 2 unit					
1600A	70223472602	Short busbar : 1ea/unit Heatsink : 1ea/unit, Barrier Pad : 1ea/unit M10 Nut Set : 4ea/unit, M6 Bolt : 4ea/unit	3P : 1 unit	5kg/unit		
	4P : 2 unit					

UL DC Compact Switch Disconnecter



Fixed type






Drawable type

Commonness		
Rated operational voltage (Ue)	(V)	
Rated insulation voltage (Ui)	(V)	
Rated impulse withstand voltage (Uimp) (kV)		
Poles	(P)	
Installation type		
Related standards		
Type		
Ampere frame	(AF)	
Rated making capacity	(kA peak)	DC
Rated short-time withstand current (Icw)	(kA/1s)	DC
Interrupting rating	(kA)	DC 1500V (4P) DC 1000V (3P) (L/R=8ms)
Operation time	(ms)	Opening time
		Closing time
Busbar connection method	Fixed type, Draw-out type	Horizontal
		Vertical
		Mixed
	Flat	Flat
Durability		
Opening and closing duration (times) (Unpaid)		Mechanical
		Electrical (L/R=3ms)
Common Demension and weight		
Weight (3P/4P)	(kg)	Draw-out
		Without cradle With cradle
		Fixed
Dimensions (W×H×D)	(mm)	Draw-out
		Fixed

Characteristics			
DC 1000V (3P), DC 1500V (4P)			
1500			
12			
3, 4			
Fixed type / Draw-out type			
UL 489B (PV system), UL 489F (ESS system)			
UDA			
UDA-08C	UDA-10C	UDA-12C	
800AF	1000AF	1200AF	
50			
50			
8	10	12	
max.40			
max.80			
○			
● (Default)			
○			
○			
12,500			
800	500	400	
19.5(3P) / 24.5(4P)			
35.5(3P) / 43(4P)			
16(3P) / 19.5(4P)			
361.3×267×255.4(3P), 361.3×267×326(4P)			
283×219.5×272.4(3P), 283×219.5×342.4(4P)			

DC Short Busbar

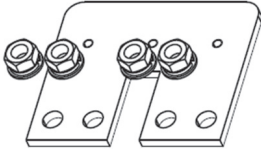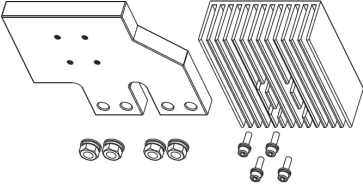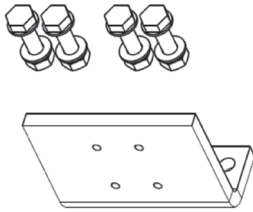Type	Busbar connection	Rated current	Order code	Edifice	Order quantity	Weight (kg/set)
Fixed type	Flat	800A	70223472603	Short busbar: 1ea/unit M10 Nut Set: 4ea/unit 	3P: 1 unit 4P: 2 unit	0.7kg/unit
		1000-1200A	70223472605	Short busbar: 1ea/unit, Heatsink: 1ea/unit M10 Nut Set: 4ea/unit, M6 Bolt: 4ea/unit Barrier Pad: 1ea/unit 	3P: 1 unit 4P: 2 unit	5kg/unit
Fixed / Draw-out type	Vertical / Horizontal	800-1200A	70223472604	Short busbar: 1ea/unit M10 Nut Set: 1ea/unit 	3P: 1 unit 4P: 2 unit	1.5kg/unit

DC ACB

- Basic rating
 - Rated voltage: 1500Vdc (4p) / 1000Vdc (3p) - Rated current: 800 ~ 3200A
 - Short-time capacity: 65kA/1sec - Breaking capacity: 70kA @ 750Vdc, 60kA @ 1500Vdc
- Multi-function relays dedicated to DC protect and enhancing user convenience
 - Precise measurement of current, voltage, power and various protection relay functions
 - Self diagnosis function, event and fault waveform recording
- Electrical endurance:
 - 10,000 operations (1600A @ 1500Vdc), 3,000 operations (3200A @ 1500Vdc)
- Isolation function convenient for withstand voltage test of switchgears
- Optional Short-Busbar considering temperature performance
- Compatible with existing Susol ACB
 - Accessories including closing and trip coils
 - Physical sizes for installation
- Applicable standards and tests: IEC 60947-2, DEKRA CB certification




Type and ratings

Type		DC 1200V	DC 1500V												
Number of poles	(P)	3 / 4	3 / 4												
Rated operational voltage (Ue)	(Vdc)	750 (3P) / 1200 (4P)	1000 (3P) / 1500 (4P)												
Rated insulation voltage (Ui)	(V)	1500	1500												
Rated impulse withstand voltage (Uimp)	(kV)	12kV	12kV												
Version		Fixed / Withdrawable	Fixed / Withdrawable												
Suitability for isolation															
Degree of pollution	IEC60661-1	3	3												
Certification		CB certification according to IEC 60947-2	CB certification according to IEC 60947-2												
Brand name		Susol						Susol							
Ampere Frame		ADH-08E 800AF	ADH-10E 1000AF	ADH-13E 1250AF	ADH-16E 1600AF	ADH-20E 2000AF	ADH-25E 2500AF	ADH-32E 3200AF	ADV-08E 800AF	ADV-10E 1000AF	ADV-13E 1250AF	ADV-16E 1600AF	ADV-20E 2000AF	ADV-25E 2500AF	ADV-32E 3200AF
Rated current (In) at 40°C	(A)	400, 630, 800	630, 800, 1000	630, 800, 1000, 1250	800, 1000, 1250, 1600	1600, 2000	1600, 2000, 2500	1600, 2000, 2500, 3200	400, 630, 800	630, 800, 1000	630, 800, 1000, 1250	800, 1000, 1250, 1600	1600, 2000, 2500	1600, 2000, 2500, 3200	
Rated ultimate breaking capacity (Icu)	(3P)	500V DC	60		85				60		70				
		750V DC	40		50				50		60				
	1000V DC	-		-				-		-					
	750V DC	50		-				-		-					
(4P)	1000V DC	-		-				-		-					
	1200V DC	35		40				60		70					
	1500V DC	-		-				-		-					
	1500V DC	-		-				-		-					
Rated service breaking capacity (Ics)	(%)	100		100				100		100					
Rated short-time withstand current (Icw)	(3P)	500V DC	60 ^{Note1)}		65				-		-				
		750V DC	40		40				50 ^{Note1)}		60				
	1000V DC	-		-				-		-					
	750V DC	50 ^{Note1)}		50				-		-					
(4P)	1000V DC	-		-				-		-					
	1200V DC	35		40				50 ^{Note1)}		65					
	1500V DC	-		-				-		-					
	1500V DC	-		-				50 ^{Note1)}		50					
Rated making capacity (Icm)	(kA peak)	100		100				100		100					
Utilization category (according to IEC 60947-2)		B		B				B		B					
Overcurrent protection	Electronic trip units for DC applications	●						●							
Operation time	Total Breaking < Icw	Less than 25ms under Icw/ Less than 75ms over Icw						Less than 25ms under Icw/ Less than 75ms over Icw							
	> Icw	80ms under						80ms under							
Closing time	(ms)	80ms under						80ms under							
Mechanical and Electrical Life cycle															
Endurance (times) (Without maintenance)	Mechanical	15,000		15,000				15,000		15,000					
	Electrical (at 1000 V DC)	lessw than 1600A	10,000		10,000				10,000		10,000				
		2000A	8,000		8,000				8,000		8,000				
		2500A	-		5,000		3,000		-		5,000		3,000		
Demension and Weight															
Weight (3P/4P)	Drawout	Without cradle	43 / 53		43 / 53				43 / 53		43 / 53				
		With cradle	87 / 103		87 / 103				87 / 103		87 / 103				
	Fixed	44 / 55		44 / 55				44 / 55		44 / 55					
External dimensions (H×W×D)	Drawout	430×412(527)×375		430×412(527)×375				430×412(527)×375		430×412(527)×375					
	Fixed	300×378(493)×295		300×378(493)×295				300×378(493)×295		300×378(493)×295					

Note 1) Duration of rated short-time withstand current (Icw) is 0.5s


Connection diagram of DC ACB

ADV	750V	1000V	1500V
ADH	500V	750V	1200V

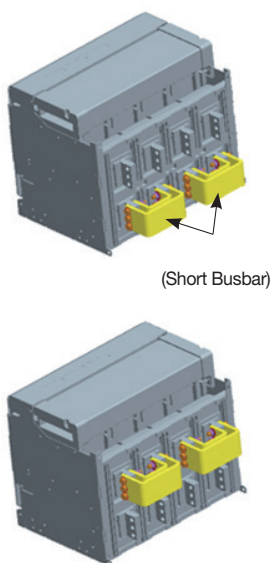

Upper supply

Lower supply

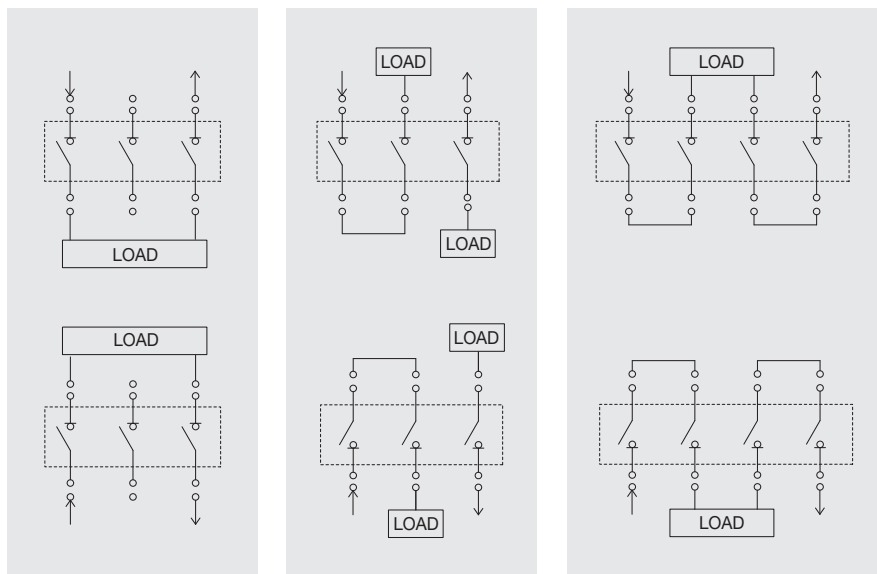

※ Refer to the following page for product dimensions with short busbar.

Composition of short busbar

1. Short busbars can be ordered as shown in the table below, or customer have to make short busbars in accordance with the specified short busbars according to AF.
2. The tightening torque for assembling short busbars is 40~50N.m

Type	AF	Qty. of code	Aspects	Parts (3P)
ADH ADV	E : ~2500AF	70223464603 3P : 1ea 4P : 2ea		Short busbars : 75mm×10T×2ea Bolt : M12×60, 6ea Nut : M12, 6ea Spring washer, Plain washer
ADH ADV	E : 3200AF	70223464620 3P : 1ea 4P : 2ea		Short busbars : 100mm×10T×1ea 120mm×105mm×10T×1ea (L type) Bolt : M12×60, 8ea Nut : M12, 8ea Spring washer, Plain washer, Heat sink

High Voltage DC Relay

What is LS High Voltage DC Relay?

The LS High Voltage DC Relay serves to supply and disconnect DC power, and contains hydrogen and nitrogen gas, which is optimized to withstand making and breaking. Therefore, it has excellent electrical durability, compact size, and low noise.



GPR Specifications



Rating

Model		GPR010	GPR040
Number of poles		1 Pole	1 Pole
Operating voltage, Ue		DC 450V	DC 450V
Rated impulse withstand voltage, Uimp		4kV	4kV
Conventional thermal current, Ith		10A	40A
Short time withstand current	120s	-	100A
	15Min	15A	60A
Durability	Mechanical (*) (3,600 operations per hour)	200,000 cycles	200,000 cycles
	Electrical	10A, 450VDC, 150,000cycles (at 360cycles/Hr)(only Making)	40A, 450VDC, 1,000cycles (at 1,200cycles/Hr)
Voltage drop (Initial)		0.5V @ 10A	0.2V @ 20A
Operating time		Max. 50ms	Max. 50ms
Release time		Max. 30ms	Max. 30ms
Insulation strength (Initial)		Min. 100MΩ(@500VDC)	Min. 100MΩ(@500VDC)
Size, W × H × D (mm)		56×28×45	67×35×47
Temperature range		-40 ~ 85℃	-40 ~ 85℃
Humidity		5-95% R.H.	5-95% R.H.
Weight		85g	145g
Certification		CE CCC	CE CCC

* The number of Mechanical times is the number that meets the basic performance after durability.

Features

Compact Design

Achieved compact size by filling with hydrogen and nitrogen gas to improve the breaking performance.

Proven Safety

High value of short circuit current withstanding.

Superior Reliability

Excellent performance with electrical and mechanical dururances.



	GPR100	GPR150	GPR250	GPR400
	1 Pole	1 Pole	1 Pole	1 Pole
	DC 450V	DC 450V	DC 450V	DC 450V
	4kV	4kV	4kV	4kV
	100A	150A	250A	400A
	225A	320A	500A	900A
	150A	225A	350A	600A
	200,000 cycles	200,000 cycles	200,000 cycles	200,000 cycles
	100A, 450VDC, 1,000cycles (at 1,200cycles/Hr)	150A, 450VDC, 1,000cycles (at 1,200cycles/Hr)	250A, 450VDC, 1,000cycles (at 360cycles/Hr)	400A, 450VDC, 1,000cycles (at 360cycles/Hr)
	0.04V @ 20A	0.04V @ 20A	0.02V @ 20A	0.02V @ 20A
	Max. 50ms	Max. 50ms	Max. 30ms	Max. 30ms
	Max. 30ms	Max. 30ms	Max. 10ms	Max. 10ms
	Min. 100M Ω (@500VDC)	Min. 100M Ω (@500VDC)	Min. 100M Ω (@500VDC)	Min. 100M Ω (@500VDC)
	81×39×70	81×39×70	92×45×87	100×58×91
	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C
	5-95% R.H.	5-95% R.H.	5-95% R.H.	5-95% R.H.
	330g	330g	500g	630g
	CE (CCC)	CE cRU _{us} (CCC)	CE (CCC)	CE (CCC)

High Voltage DC Relay

GPR-M Specifications (Operating voltage DC1000V)



Model		GPR-M010	GPR-M040	GPR-M100
Number of poles		1 Pole	1 Pole	1 Pole
Operating voltage, Ue		DC 600V	DC 1000V	DC 1000V
Rated impulse withstand voltage, Uimp		4kV	4kV	6kV
Conventional thermal current, Ith		10A	40A	100A
Short time withstand current	2Min	-	100A	225A
	15Min	15A	60A	150A
Durability	Mechanical (*) (3,600 operations per hour)	200,000 cycles	200,000 cycles	200,000 cycles
	Electrical	5A, 600VDC, 10,000cycles (at 360cycles/Hr)(only Making)	20A, 1000VDC, 1,000cycles (at 360cycles/Hr)	50A, 1000VDC, 1,000cycles (at 360cycles/Hr)
Voltage drop(Initial)		0.5V @ 10A	0.2V @ 20A	0.04V @ 20A
Operating time		Max. 50ms	Max. 50ms	Max. 50ms
Release time		Max. 30ms	Max. 30ms	Max. 30ms
Insulation strength(Initial)		Min. 100MΩ(@1000VDC)	Min. 100MΩ(@1000VDC)	Min. 100MΩ(@1000VDC)
Size, W × H × D(mm)		56 × 28 × 45	67 × 35 × 47	81 × 39 × 70
Temperature range		-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C
Humidity		5-95% R.H.	5-95% R.H.	5-95% R.H.
Weight		80g	145g	330g
Certification		CE cRU [®] US (CCC)	CE cRU [®] US (CCC)	CE cRU [®] US (CCC)

* The number of Mechanical times is the number that meets the basic performance after durability.



*Bi-directional

	GPR-M150	GPR-M250	GPR-M400	GPR-M400-A	GPR-M400-A BI
	1 Pole	1 Pole	1 Pole	1 Pole	1 Pole
	DC 1000V	DC 1000V	DC 1000V	DC 1000V	DC 1000V
	6kV	6kV	6kV	6kV	4kV
	150A	250A	400A	400A	400A
	320A	500A	750A	750A	750A
	225A	350A	500A	500A	500A
	200,000 cycles	200,000 cycles	200,000 cycles	200,000 cycles	200,000 cycles
	75A, 1000VDC, 1,000cycles (at 360cycles/Hr)	125A, 1000VDC, 1,000cycles (at 360cycles/Hr)	200A, 1000VDC, 1,000cycles (at 360cycles/Hr)	200A, 1000VDC, 3,000cycles (at 360cycles/Hr)	100A, 1000VDC, 6,000cycles 220A, 800VDC, 1500cycles (at 360cycles/Hr)
	0.04V @ 20A	0.02V @ 20A	0.02V @ 20A	0.02V @ 20A	0.04V @ 20A
	Max. 50ms	Max. 30ms	Max. 30ms	Max. 30ms	Max. 30ms
	Max. 30ms	Max. 10ms	Max. 10ms	Max. 10ms	Max. 10ms
	Min. 100MΩ(@1000VDC)	Min. 100MΩ(@1000VDC)	Min. 100MΩ(@1000VDC)	Min. 100MΩ(@1000VDC)	Min. 100MΩ(@1000VDC)
	81 × 39 × 70	92 × 45 × 87	100 × 58 × 91	100 × 58 × 99	100 × 58 × 99
	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C	-40 ~ 85°C
	5-95% R.H.	5-95% R.H.	5-95% R.H.	5-95% R.H.	5-95% R.H.
	330g	500g	630g	750g	800g
	CE cRU ^{US} CCC	CE cRU ^{US} CCC	CE cRU ^{US} CCC	CE cRU ^{US}	CE cRU ^{US} CCC

High Voltage DC Relay

GPR-H Specifications (Operating voltage DC1500V)



* Bi-directional



* Bi-directional

Model		GPR-H500-A	GPR-H600-A
Number of poles		1 Pole	1 Pole
Operating voltage, Ue		DC 1500V	DC 1500V
Rated impulse withstand voltage, Uimp		8kV	8kV
Conventional thermal current, Ith		500A	600A
Short time withstand current	2Min	900A	1000A
	15Min	750A	800A
Durability	Mechanical (*) (3,600 operations per hour)	200,000 cycles	200,000 cycles
	Electrical	200A, 1500VDC, 1,000cycles (at 360cycles/Hr)	200A, 1500VDC, 1,500 cycles 150A, 1500VDC, 6,000 cycles (at 360cycles/Hr)
Voltage drop (Initial)		0.04V @ 20A	0.04V @ 20A
Operating time		Max. 35ms	Max. 35ms
Release time		Max. 15ms	Max. 15ms
Insulation strength (Initial)		Min. 100MΩ(@1000VDC)	Min. 100MΩ (at DC1000V)
Size, W × H × D (mm)		118 × 70 × 108	118 × 70 × 110.5
Temperature range		-40 ~ 85	-40 to 85
Humidity		5-95% R.H.	5 to 95% R.H.
Weight		1.3kg	1.3kg
Certification		CE cRUus CCC	CE cRUus CCC

* The number of Mechanical times is the number that meets the basic performance after durability.

Ordering Information

GPR-M 400 -A DC12V SM BI □

1

2

3

4

5

6

7

1 Operating Voltage

R | 450V
R-M | 1,000V
R-H | 1,500V~

2 Conventional thermal Current

010 | 10A | 250 | 250A
040 | 40A | 400 | 400A
100 | 100A | 500 | 500A
150 | 150A

3 Aux Type

-A | Aux.
blank | No Aux.

4 Control Voltage

DC12V
DC24V

5 Mounting Type

blank | Bottom Mounting
SM | Side Mounting




6 Breaking Direction

blank | Uni-directional
BI | Bi-directional

7 Special feature

blank | General
Special feature

Option detail

No	Item	Shape	Type	Remarks
3	Auxiliary contact		GPR-M400-A	ON / OFF detection of main contact
			GPR-H500-A	
4	Control voltage	-	See coil rating on page 10	Coil voltage 12/24V
5	Mounting type		ALL	Vertical mounting
			GPR150 / GPR-M150 GPR250 / GPR-M250	Horizontal mounting

DC MCB

Characteristics

- Solar power, renewable suitable for DC power source
- SEMKO CB
- Maximum working voltage: DC1,000V
- Rating and number of poles: 1~63A, 1/2/3/4 pole
- Rated voltage: DC250/500/750/1000V
- Rated breaking capacity: 10kA
- Trip characteristic: B, C
- Accessorys: AX, AL, SHT



Rating



ON / OFF
Display Indicator



AX, AL




SHT, UVT


Type		
Frame size		
No. of poles		
Rated current, In		
Rated operational voltage, Ue	Reference standard	Poles
DC	IEC 60947-2, Icu	Rated voltage
		Breaking current
Rated insulation voltage, Ui AC		
Rated impulse withstand voltage, Uimp		
Trip characteristic		
Protection		
Endurance life (times)	Electrical	
	Mechanical	
Degree of protection		
Tightening torque		
Installation		
Type of Terminal		
Type of trip		
Ambient temperature		
Approval		






BK63H-DC			
63AF			
1P, 2P, 3P, 4P			
1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63A			
1P	2P	3P	4P
250V	500V	750V	1000V
10kA	10kA	10kA	10kA
DC1000V			
6kV			
B (5In), C (8In)			
Overload and short circuit			
1,500			
20,000			
IP20			
18-4 AWG (0.75 ... 25mm ²) / 20 N.m			
Mounting on 35mm DIN rail			
Lug type			
Thermal-Magnetic			
40°C (Standard), -35~ + 70°C (Use)			
CE, SEMKO, CB			

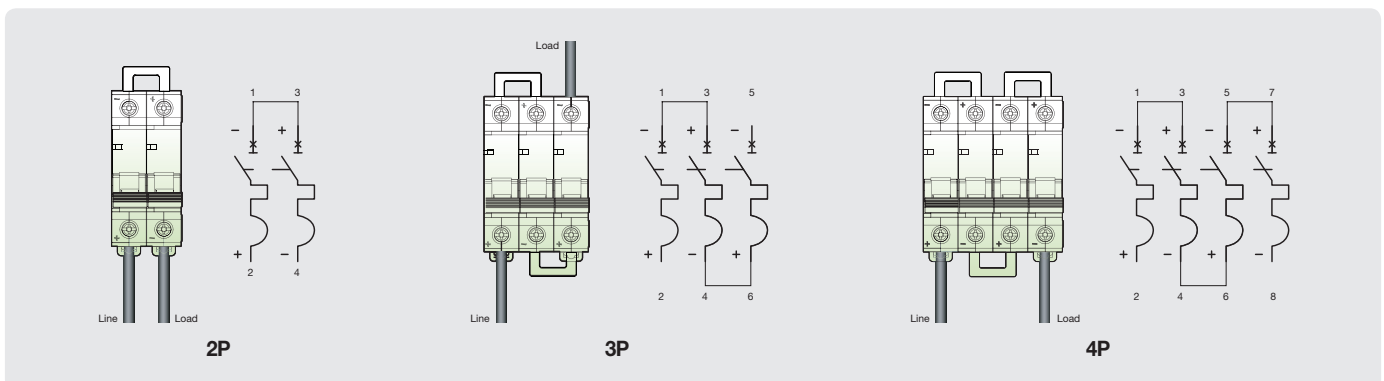DC Type connection wiring diagram

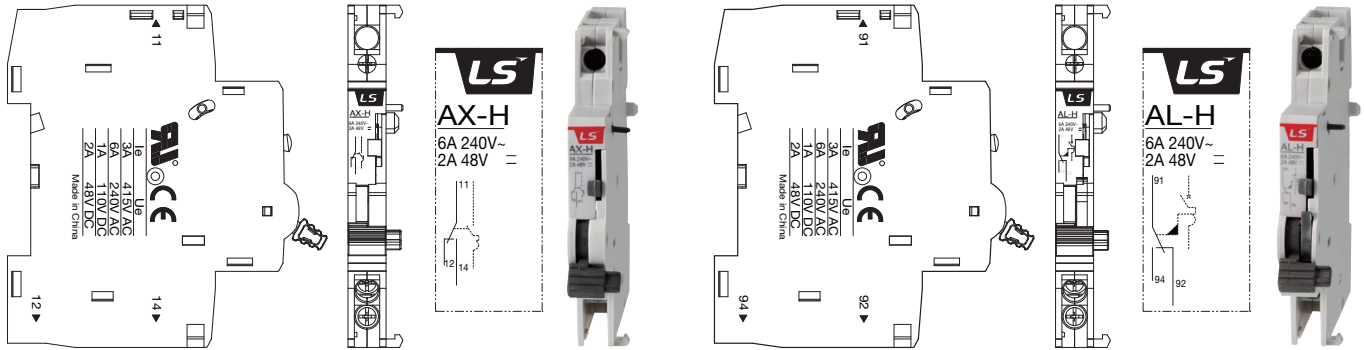


Accessory



Type	AX-H	AL-H	SHT-H
Appearance			
Rated Operational Current (A)	AC 6A@240V / 3A@415V DC 6A@24V / 2A@48V / 1A@125V		DC 24-220V, AC 110-380V
Rated voltage (Ue)	-		85%-110%Ue
Working voltage	-		-
Mechanical Endurance	10,000		-
Cable capacity	0.75~2.5mm ²		≤ 2.5mm ²
Contact			-
Weight (g)	48	48	100


* 24V only SHT product. Please note when ordering.

Dimensions

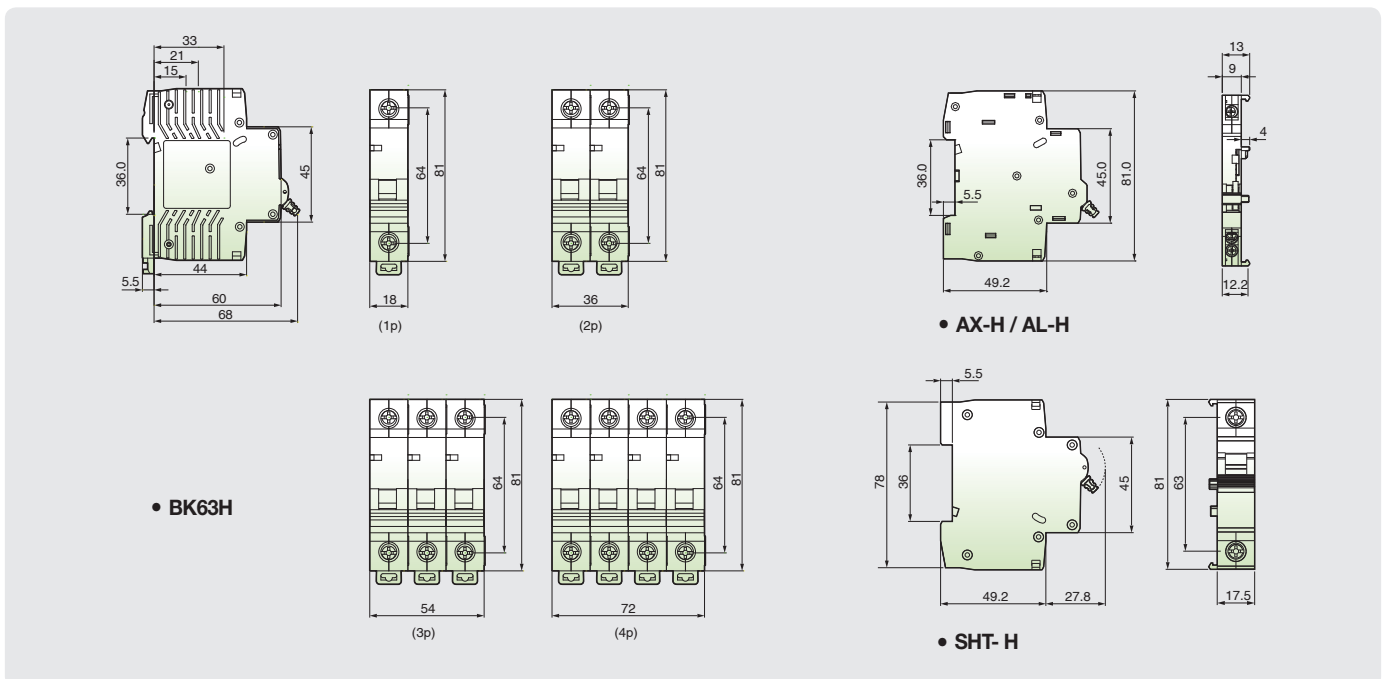



DC FUSE

Fuse rating

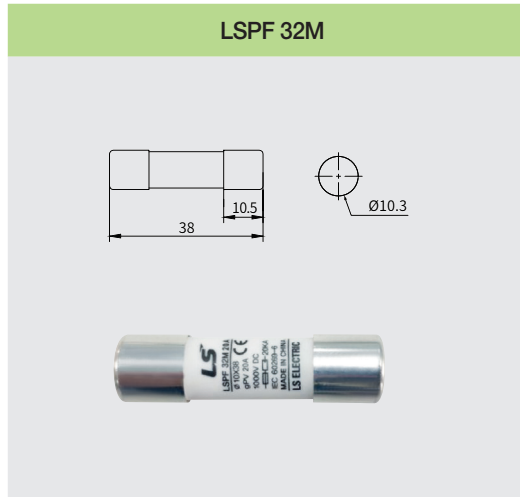

Type	FUSE	
Model	LSPF 32M	LSPF 32H
Rated voltage	DC 1000V	DC 1500V
Rated current	2A ~ 32A	2A ~ 32A
Class of operation	gPV	gPV
Breaking capacity	20kA	20kA
Time constant	1 ~ 3ms	1 ~ 3ms
Size (mm)	10×38mm	10×85mm
Standard	IEC 60269-6	IEC 60269-6
Certificate	CE	CE

Fuse holder rating

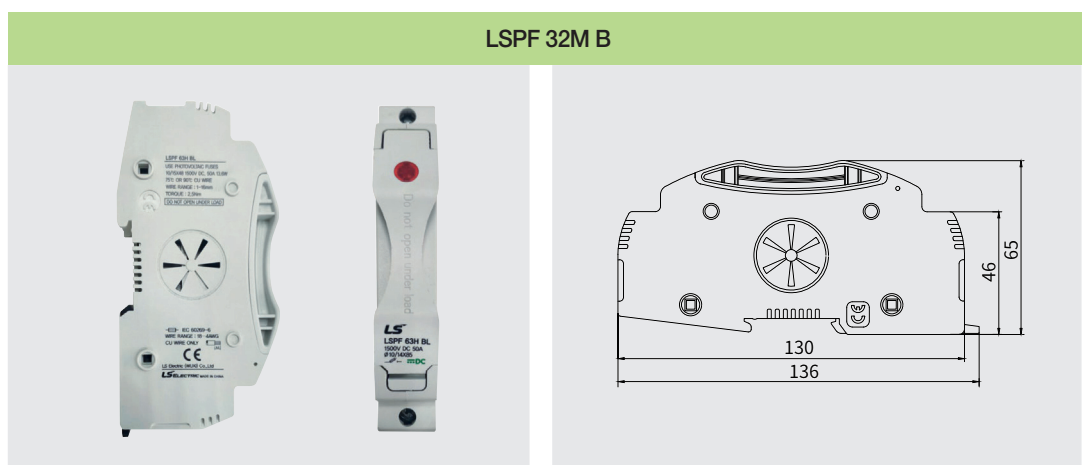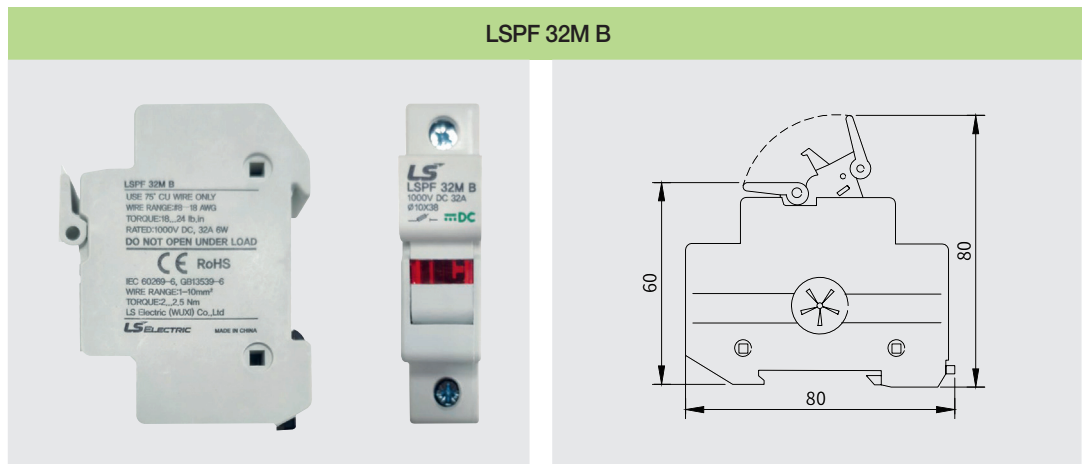

Type	FUSE HOLD	
Model	LSPF 32M B	LSPF 32H BL
Rated voltage	DC 1000V	DC 1500V
Rated current	32A	50A
Class of operation	gPV	gPV
Signal indicator	LED	LED
Wire range	1 ~ 10mm ²	1 ~ 16mm ²
Torque	2 ~ 2.5 N.m	2.5 N.m
Size (W×H×D, mm)	18×80×60mm	24×136×65mm
Standard	IEC 60269-6	IEC 60269-6
Certificate	CE	CE

DC Contactors

Characteristics

Products application & Function

- Two normally open main contacts for DC circuit
- Positive and negative poles indicated on the front plate
- Eternal magnet installed for the effective arc extinguishing
- DIN rail or screw mountable
- 2NO+2NC Auxiliary contacts built-in as standard
- AC/DC control voltage
- CE, UL Certified




Selection

Contactor types	DC-2~5 ratings			DC-1	Continuous current, Ith	Auxiliary contacts
	125V	250V	500V	1000V		
MD-30a	40A	30A	20A	10A	60A	2a(NO)+2b(NC)
MD-60a	80A	60A	40A	25A	100A	2a(NO)+2b(NC)
MD-100a	120A	100A	60A	35A	135A	2a(NO)+2b(NC)

Ratings of auxiliary contacts

UA-1	AC15 duty						DC13 duty				
	120V	240V	380V	480V	500V	600V	125V	250V	400V	500V	600V
Rated currents	6A	3A	1.9A	1.5A	1.4A	1.2A	1.1A	0.55A	0.31A	0.27A	0.2A
Continuous current, Ith	16A										






Coil voltage

AC	50/60Hz	24, 48, 100, 110, 120, 200, 220, 230, 240, 380, 400, 415, 440, 500, 550V
DC	DC	12, 20, 24, 48, 60, 80, 100, 110, 125, 200, 220, 250V

Dimensions

MD-30a AC(DC)




2NO2NC

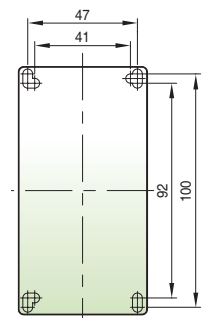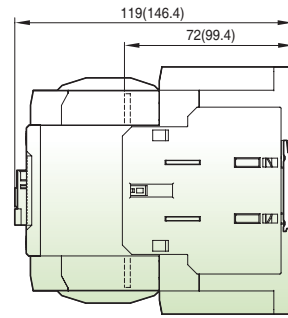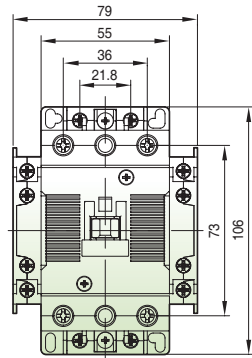

[mm]


MD-60a,100a AC(DC)

2NO2NC

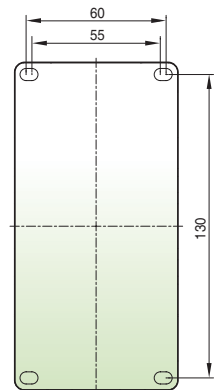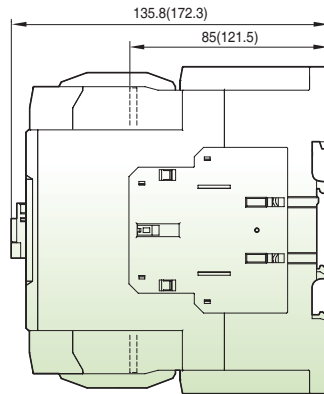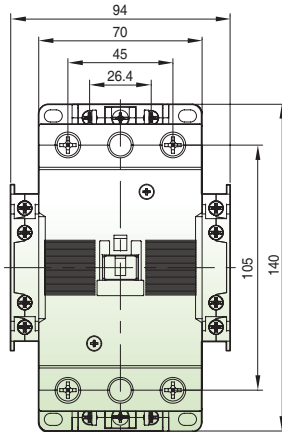


Composition

MD-30a, 60a, 100a

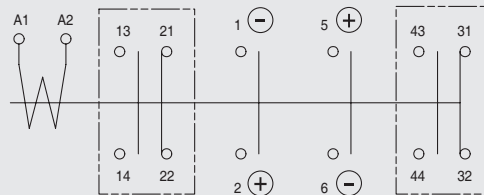

Contact arrangement

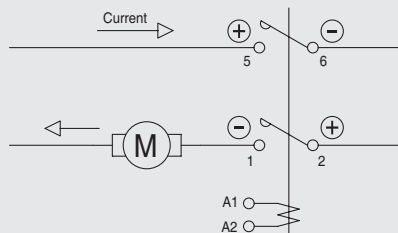

SPD BK Series (DC/DIN type)

Characteristics

- DC system surge voltage protection
- Rating: ~ DC 1500V
- Pole: 2P, 3P
- Grades: Class II
- Status indication
 - Steady state: Green
 - After the accident: colorless (black)



Rating



Type		DC Type			
		BK20S-DC110	BK20S-DC600	BK20S-DC1000	BK20S-DC1500
No. of poles	[Pole]	2P	3P		
Rated voltages	U_n [V]	DC110	DC600	DC1000	DC1500
Max. continued-operation voltage	U_c [V]	DC220	DC700	DC1200	DC1500
Voltage protection level	U_p [kV]	≤ 1.0	≤ 2.5	≤ 3.9	≤ 4.5
Nominal discharge current	I_n [kA]	20	20	20	20
Max. discharge current	I_{max} [kA]	40	40	40	40
Impulse current	I_{imp} [kA]	-	-	-	-
Grades	Test Class	Class II			
Reaction time		< 25ns			
Status indication		Have Status indication			
Operating temperature range		-40°C~80°C			
Cross-sectional area of the connecting		6mm ² or more			
Accessories		AL ^{Note 1)}			
Standard		IEC 61643-11 / UL1449			
Certification		CE	CE	CE	CE
SPD Disconnector	MCCB	TD100 2P 32A	TD100 3P 32A	TD100 4P 32A	TSD250N/H 4P 63A
	MCB	BK63H-DC 2P 40A	BK63H-DC 3P 40A	BK63H-DC 4P 40A	-

Note) 1. The AL contact accessories are not sole separately. You need to choose these accessories when you place your order for the product. Please be mindful of this fact when you place your order.


Dimensions

BK20S-DC


[Unit : mm]

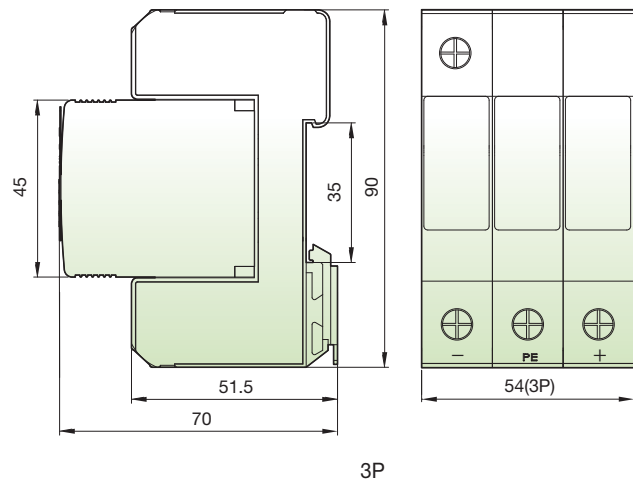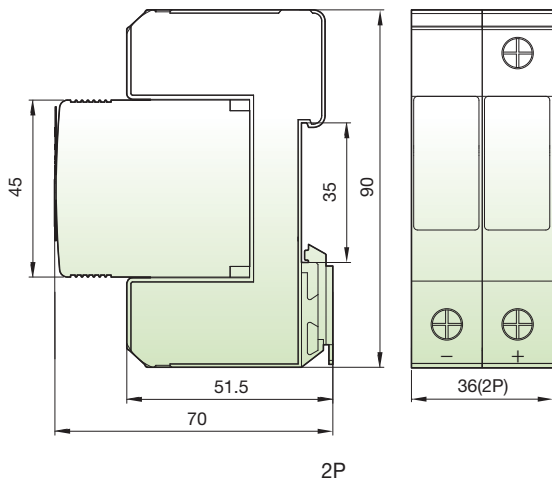

Installation wiring method

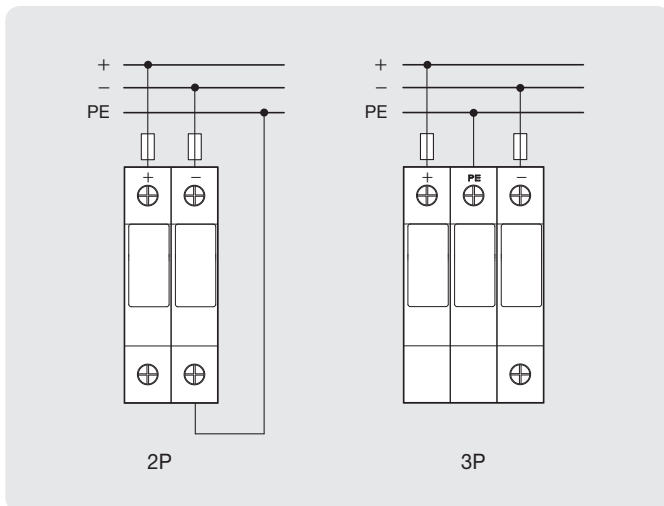

Wiring Diagram

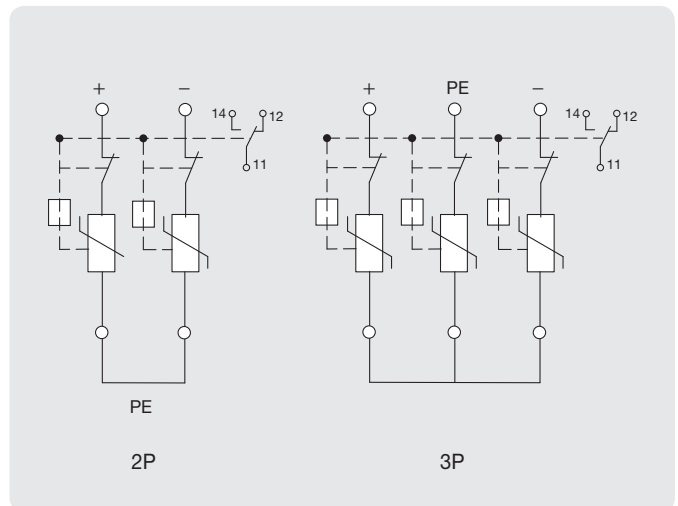

Susol

Super Solution

Metasol

Meta Solution



AC Components

You can count on us.

Customer satisfaction with world-class products and services LS is committed to excellence.

LS is implementing the 6-Sigma program with the goal of 'zero-defect' to make only the highest quality products. And to secure product reliability, we embody a high quality guarantee system by carrying out product test evaluations that are internationally recognized for their use of the most current technology.

Susol MCCB	48
Susol MCCB up to 1000Vac	54
Susol ACB	56
Susol ACB up to 1150Vac	58
Susol Compact ACB	62
Susol VCB	68
Metasol Contactors	72
XGIPAM	82
Susol RMU	83
Transformer	89

Susol MCCB (100~800AF)



Rating

			TD100			TD160			TS100				
Frame size	[AF]		100			160			100				
Rated current, I _n	[A]		16, 20, 25, 32, 40, 50, 63, 80, 100			100, 125, 160			40, 50, 63, 80, 100				
No. of poles			2, 3, 4			2, 3, 4			2, 3, 4				
Rated operational voltage, U _e	AC	[V]	690			690			690				
	DC	[V]	500			500			500				
Rated impulse withstand voltage, U _{imp}		[kV]	8			8			8				
Rated insulation voltage, U _i		[V]	1000			1000			1000				
Rated ultimate short-circuit breaking capacity, I _{cu}	AC 50/60Hz	220/240V	[kA]	N	H	L	N	H	L	N	H	L	
		380/415V	[kA]	85	100	200	85	100	200	100	120	200	
		440/460V	[kA]	50	85	150	50	85	150	50	85	150	
		480/500V	[kA]	50	70	130	50	70	130	50	70	130	
		525V	[kA]	30	50	65	30	50	65	42	65	85	
		660/690V	[kA]	22	35	50	22	35	50	22	35	50	
	DC	250V	[kA]	10	10	10	10	10	10	10	10	10	
		500V	[kA]	42	65	100	42	65	100	50	85	100	
	Rated service breaking capacity, I _{cs}	AC 50/60Hz	220~525V	[%I _{cu}]	100%	100%	100%	100%	100%	100%	100%	100%	100%
			660/690V	[kA]	5	5	5	5	5	5	5	5	5
Rated short-circuit making capacity, I _{cm}	AC 50/60Hz	220/240V	[kA]	100%	100%	100%	100%	100%	100%	100%	100%	100%	
		380/415V	[kA]	187	220	440	187	220	440	220	264	440	
		440/460V	[kA]	105	187	330	105	187	330	105	187	330	
		480/500V	[kA]	105	154	286	105	154	286	105	154	286	
		525V	[kA]	63	105	143	63	105	143	88	143	187	
		660/690V	[kA]	46	74	105	46	74	105	46	74	105	
Category of utilization			A			A			A				
Isolation behavior			●			●			●				
Thermal-Magnetic	● fixed-thermal, fixed-magnetic	FTU	●	●			●			●			
		● adjustable-thermal, fixed-magnetic	FMU	●	●			●			●		
		● adjustable-thermal, adjustable-magnetic	ATU	-	-			-			-		
Electronic	● LSI	ETS	-	-			-			●			
		● LSI	ETM	-	-			-			-		
		Option	Earth-fault protection, Ig	-	-			-			-		
		Zone selective interlocking, ZSI	-	-			-			-			
		Ammeter	-	-			-			-			
		Communication	-	-			-			-			
Connection	fixed	front-connection	●	●			●			●			
		rear-connection	●	●			●			●			
	plug-in	front-connection	●	●			●			●			
		rear-connection	●	●			●			●			
Mechanical life	[operations]		25000			25000			25000				
Electrical life	[operations]		10000			10000			10000				
Basic dimensions, W×H×D (front connection)	3-pole	[mm]	90×140×86			90×140×86			105×160×86				
	4-pole	[mm]	120×140×86			120×140×86			140×160×86				
Weight (front connection)	3-pole	[kg]	1.5			1.5			2				
	4-pole	[kg]	1.8			1.8			2.6				
Reference standard			IEC60947-2			IEC60947-2			IEC60947-2				

* The trip unit ATU is available from 125A



TS160			TS250			TS400			TS630			TS800		
160			250			400			630			800		
(100)*, 125, 160			125, 160, 200, 250			300, 400			500, 630			700, 800		
2, 3, 4			2, 3, 4			2, 3, 4			2, 3, 4			2, 3, 4		
690			690			690			690			690		
500			500			500			500			500		
8			8			8			8			8		
1000			1000			1000			1000			1000		
N	H	L	N	H	L	N	H	L	N	H	L	N	H	L
100	120	200	100	120	200	100	120	200	100	120	200	100	120	200
50	85	150	50	85	150	65	85	150	65	85	150	65	100	150
50	70	130	50	70	130	65	85	130	65	85	130	65	100	130
42	65	85	42	65	85	42	65	85	42	65	85	42	85	100
22	35	50	22	35	50	22	35	50	22	35	50	22	35	50
10	10	10	10	10	10	10	20	35	10	20	35	10	20	35
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
50	85	100	50	85	100	50	85	100	50	85	100	50	85	100
100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
5	5	5	5	5	5	10	12	12	10	12	12	10	20	20
100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
220	264	440	220	264	440	220	264	440	220	264	440	220	264	440
105	187	330	105	187	330	143	187	330	143	187	330	143	220	330
105	154	286	105	154	286	143	187	286	143	187	286	143	220	286
88	143	187	88	143	187	88	143	187	88	143	187	88	187	220
46	74	105	46	74	105	46	74	105	46	74	105	46	74	105
17	17	17	17	17	17	17	40	74	17	40	74	17	40	74
A			A			A			A			A		
●			●			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
-			-			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
●			●			●			●			●		
25000			25000			20000			20000			10000		
10000			10000			6000			6000			3000		
105×160×86			105×160×86			140×260×110			140×260×110			210×320×135		
140×160×86			140×160×86			186.5×260×110			186.5×260×110			280×320×135		
2			2			5.4			5.4			15.1		
2.6			2.6			7.2			7.2			19.6		
IEC60947-2			IEC60947-2			IEC60947-2			IEC60947-2			IEC60947-2		

Susol MCCB (1600AF)







Rating

Type			
Ampere frame			
Pole			
Rated current,(A)	In	-5~40°C	
		50°C	
		65°C	
Rated insulation voltage, (V)	Ui		
Rated impulse withstand voltage, (kV)	Uimp		
Rated operational voltage, (V)	Ue	AC50/60Hz	
		DC	
Rated short-circuit breaking capacity			
IEC60947-2 AC50/60Hz (sym)	Rated ultimate short-circuit breaking capacity, (kA) (Icu)	220/240V	
		380/415V	
		440/460V	
		480/500V	
		660/690V	
		DC	
		250V 2P	
		500V 2P	
		750V 3P	
	Rated service %Icu breaking capacity (Ics)		
	Rated short-circuit making capacity (kA) (Icw)	AC50/60Hz	1s 3s
Overriding instantaneous protection		kA peak	
Isolation			
Category			
(Life cycle)	Mechanical life (operations)		
	Electrical life (operations)	440V	In/2
			In
		690V	In/2
In			
Pollution degree			
Dimension (mm)		3-pole	
(W×H×D)		4-pole	
Weight (kg)		3-pole	
		4-pole	

TS1000			TS1250		TS1600		
TS1000			TS1250		TS1600		
1000			1250		1600		
3, 4			3, 4		3, 4		
800, 1000			1250		1600		
800, 1000			1250		1560		
800, 1000			1240		1420		
1000			1000		1000		
8			8		8		
690			690		690		
-			-		-		
N	H	L	N	H	N	H	
55	75	200	55	75	55	75	
50	70	150	50	70	50	70	
50	65	130	50	65	50	65	
40	50	100	40	50	40	50	
35	45	-	35	45	35	45	
-	-	-	-	-	-	-	
-	-	-	-	-	-	-	
-	-	-	-	-	-	-	
100%	75%	100%	100%	75%	100%	75%	
25		12		25		25	
-		-		-		-	
50		30		50		50	
○		○		○		○	
B		A		B		B	
10000		4000		10000		10000	
6000		4000		5000		5000	
5000		3000		4000		2000	
4000		3000		3000		2000	
2000		2000		2000		1000	
3		3		3		3	
			210×327×152.5				
			280×327×152.5				
			13				
			16.8				

* Power. Reverse connection of the load side is possible, but use it for normal connection for maintenance, inspection and safety in use.
* 4-pole neutral electrode (N phase) is a method that is blocked after line input.

Overview

Classification	N type	A type	P type	S type
Externals				
Current protection	• L / S / I / G / Thermal	• L / S / I / G / Thermal • ZSI(Protective coordination)	• L / S / I / G / Thermal(Continuous) • ZSI(Protective coordination)	• P type
Other protection	-	• Earth leakage (Option)	• Earth leakage(Option) • Over/Under current • Over/Under frequency • Unbalance(Voltage/Current) • Reverse power	• P type
Measurement function	-	• Current (R / S / T / N)	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand	• 3 Phase Voltage/Current RMS/Vector • Power(P, Q, S), PF(3-Phase) • Energy(Positive/Negative) • Frequency, Demand • Voltage/Current harmonics (1st~63th) • 3 Phase Waveforms • THD, TDD, K-Factor
Fine adjustment	-	-	• Fine adjustment for long/short time delay/instantaneous/ ground	• P type
Pre Trip Alarm	-	-	• Overload protection relays : DO (Alarm) (Ground fault is not available when using Pre trip alarm)	• P type
Digital Output	-	• 3DO (Fixed) • L, S/I, G Alarm	• 3DO (Programmable) • Trip, Alarm, General	• P type
IDMTL setting	-	-	• Compliance with IEC60255-3 SIT, VIT, EIT, DT	• P type
Communication	-	• Modbus/RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP	• Modbus / RS-485 • Profibus-DP
Power supply	• Self Power -Power source works over 25% of current of In (one pole)	• Self Power - Power source works over 25% of current of In (one pole) - External power source are required for comm. • AC/DC 100~250V • DC 24~60V	• AC/DC 100~250V • DC 24~60V	• AC/DC 100~250V • DC 24~60V
RTC timer	• Available	• Available	• Available	• Available
LED for trip info.	• Long time delay • Short time delay/Instantaneous • Ground fault	• N type	• N type	• N type
Fault recording	-	• 10 records (Fault/Current/Date and Time)	• 256 records (Fault/Current/Date and Time)	• 256 records • Last fault wave recording (3 Phase)
Event recording	-	-	• 256 records(Content, Status, Date)	• P type
Operating button	• Reset button	• Reset, Menu Up/Down, Left/Right, Enter	• A type	• A type

Each type of OCR has a built-in battery.

1. Battery life

1) LED is off: 14 ~ 28 years

2) 1 LED is continuously on or flashing: 7 ~ 14 days

2. OCR current detectable range

1) 10 : 20% or more of the rated current (In) ratio to the value of In regardless of the setting value of Iu and Ir)

2) 30 : 12% or more of the rated current (In)

* RTC Timer : Real Time Clock Timer (required for time alarm and hot start function when event occur)

Susol Switch-Disconnectors (100~800AF)

Electrical characteristics / Trip unit - DSU

Wiring breaker has the same appearance as circuit breakers but has switching function without protection function. Therefore, its basic accessories are the same accessories for circuit breakers.




Rating

		TD100NA	TD160NA		TS100NA
Frame size	[AF]	100	160	160	100
Conventional thermal current, I _{th}	[A]	100	100	160	100
No. of poles		2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4
Rated operational voltage, U _e	AC	690	-	690	690
	DC	500	500, 750, 1100	500, 750, 1100	500
Rated operational current, I _e		100	-	160	100
Rated impulse withstand voltage, U _{imp}	[kV]	8	8	8	8
Rated insulation voltage, U _i	AC	750	-	750	750
	DC	-	1100	1100	-
Rated short-circuit making capacity, I _{cm}	AC	3.1	-	3.1	2.8
	DC	-	1.92	1.92	-
Rated short-time withstand current, I _{cw}	AC	1s	2200	-	2200
		3s	2200	-	2200
		20s	960	-	960
	DC	1s	-	1920	1920
Isolation behavior		●	●	●	●
Trip unit (Release)	● Disconnector unit	DSU	●	●	●
	●				
Connection	Fixed	Front-connection	●	●	●
		Rear-connection	●	●	●
	Plug-in	Front-connection	●	●	●
		Rear-connection	●	●	●
Mechanical life	[Operations]	25000	-	25000	25000
Electrical life @415 V	AC	10000	-	10000	10000
	DC	-	1500	1000	-
Basic dimensions, W×H×D (Front connection)	3-pole	90×140×86	90×140×86		105×160×86
	4-pole	120×140×86	120×140×86		140×160×86
Weight (Front connection)	3-pole	1.5	1.5		2
	4-pole	1.8	1.8		2.6
Reference standard		IEC60947-3	IEC60947-3		IEC60947-3

Note)

1. Rating of TD160NA is 100,160A
2. Rating of TS250NA is 200, 250A
3. DC Rating of TS630NA is 500A


DC Exemplary circuit diagrams

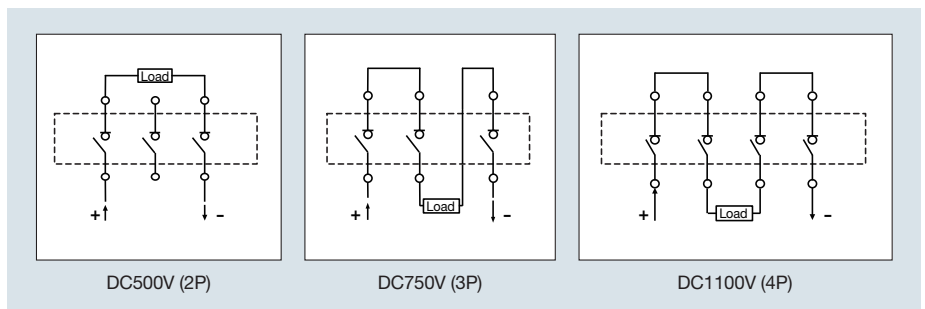



	TS160NA	TS250NA		TS400NA	TS630NA	TS800NA
	160	250	250	400	630	800
	160	200	250	400	630 (500) ^{Note 3)}	800
	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4	2, 3, 4
	690	-	690	690	690	690
	500	500, 750, 1100	500, 750, 1100	500	500, 750, 1100	500, 750, 1100
	160	-	250	400	630	800
	8	8	8	8	8	8
	750	-	750	750	750	750
	-	1100	1100	1100	1100	1100
	3.6	-	4.9	7.1	8.5	12
	-	3.0	3.0	6.0	6.0	9.6
	2500	-	3500	5000	6300	8000
	2500	-	3500	5000	6300	8000
	960	-	1350	1930	2320	2560
	-	3000	3000	6000	6000	9600
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	●	●	●	●	●	●
	25000	-	25000	20000	20000	10000
	10000	10000	10000	6000	6000	3000
	-	1000	1000	1000	1000	500
	105×160×86	105×160×86		140×260×110	140×260×110	210×320×135
	140×160×86	140×160×86		186.5×260×110	186.5×260×110	280×320×135
	2	2		5.4	5.4	15.1
	2.6	2.6		7.2	7.2	19.6
	IEC60947-3	IEC60947-3		IEC60947-3	IEC60947-3	IEC60947-3

Trip unit appearance

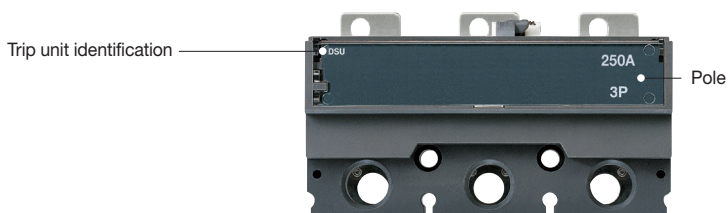

Susol MCCB (Up to 1000Vac)

Characteristics

For renewable application and high altitude

- High breaking capacity (Up to 1000Vac)
- Features compact size
- Various trip unit
- Standards: Acquisition of dual standards IEC/UL

Rating



FRAME	
Rated voltage	
Rated current	
Number of poles	
Breaker type	
UL489	
Interrupting capacity (kA) UL, CSA	AC 800V
	AC 1000V
IEC 60947-2	
Ultimate breaking capacity (kA), Icu	AC 690V
	AC 800V
	AC 1000V
Service breaking capacity (kA), Ics	AC 690V
	AC 800V
	AC 1000V
Insulation voltage, Ui	
Impulse withstand voltage, Uimp	
Utilization category	
IEC 60947-3	
Insulation voltage, Ui	
Impulse withstand voltage, Uimp	
Rated short-time withstand current, Icw	
Utilization category	
Trip Unit	
Trip unit	FTU*
	FMU*
	ATU*
	MCS**
	DSU***
Accessories	
Unit mounted	
Mechanical lugs	
Busbar connectors	
Control wire terminal kit	
Motor operator	
Interphase barriers	
Shunt trip	
Undervoltage trip	
Auxiliary switch	
Alarm switch	
Directly-Mounted rotary operating handle	
IEC-Door-Mounted operating mechanisms	
Padlock attachment	
Weight(approximate), lbs.(kg)	3 Pole
	4 Pole
Dimensions, Inches(mm)	3 Pole
	4 Pole

UTV250		
690/800/1000 Vac		
60, 80, 100, 150, 200, 250A		
3/4		
E	N	H
25	42	50
14	20	30
65	85	100
25	40	50
15	20	30
65	85	100
18.5	30	37.5
8	10	15
1000 Vac		
8 kV		
A		
1000 Vac		
8 kV		
3 kA		
AC-23A		
60, 80, 100, 150, 200, 250A		
60, 80, 100, 150, 200, 250A		
100, 150, 200, 250A		
60, 80, 100, 150, 200, 250A		
250A		
○		
○		
○		
○		
○		
○		
○		
○		
○		
○		
○		
○		
○		
○		
4.85(2.20)		
6.35(2.88)		
W	H	D
4.13(105)	8.07(205)	3.62(92)
5.51(140)	8.07(205)	3.62(92)

* FTU, FMU, ATU: UL489, IEC 60947-2 ** UL 489 Only *** IEC 60947-3 Only

ACB

Air Circuit Breakers

Premium Susol ACB meets your demands for high breaking capacity, full line-up, and optimized panel size. Various accessories and connection methods create a user-friendly handling. Susol ACB provides total solution with an advanced trip relay for measurement, diagnosis, analysis, and communication as well as protective functions for absolute protective coordination and electric power monitoring system.

- KS certified (KS C 4620)
- KEPIC(Nuclear rating) and quality (Q-class) certified.
- LR, ABS, DNV, KR, BV, GL, RINA, NK certified
- Maximum breaking capacity : 150kA (6300AF at 500Vac)
- 2000/4000/6300AF, 3 Ampere Frame Sizes
- N phase current conducting capacity : 100%
- Offers variety of accessories including digital trip relay with metering/measuring/analysis/communication functions.
- Rated impulse voltage (Uimp) : 12kV

Ratings

- In : 630~6300AF 3, 4 poles, fixed or draw-in/out type
- Ics : 85/100/150kA, 500Vac rating
- Icw : 65/85/100kA

LS has passed and achieved Korea's highest and toughest KS rating (KS C 8325 KS C 4620) to prove its safety and functionality in ACB market.



Susol ACB (~6300AF)



Rating

Type			AH-D					
Ampere frame (AF)			AH-06D	AH-08D	AH-10D	AH-13D	AH-16D	AH-20D
Rated current(A)	(In max)	at 40°C	630	800	1000	1250	1600	2000
Setting current (A) *	Control trip relay (... × In max)		(0.4 ~ 1.0) × In max					
Rated current of neutral pole (A)			400	400	1000	1250	1600	2000
			630	800				
Rated insulation voltage(V)	(Ui)		1,000					
Rated operational voltage(V)	(Ue)		690					
Rated impulse withstand voltage (kV)	(Uimp)		12					
Frequency(Hz)			50/60					
Number of poles (P)			3/4					
Rated breaking capacity (kA sym)			85					
AC 50/60Hz	(Icu)	IEC 60947-2 KS C 4620	220V/230V/380V/415V 460V/480V/500V 550V/600V/690V		85			
Rated service breaking capacity (kA)	(Ics)		... % × Icu		100%			
Rated making capacity (kA peak)			187					
AC 50/60Hz	(Icm)	IEC 60947-2 KS C 4620	220V/230V/380V/415V 460V/480V/500V 550V/600V/690V		187			
Rated short-time withstand current (kA)	(Icw)		1 sec		65			
			2 sec		60			
			3 sec		50			
Operating time (ms)			Maximum total breaking time		40			
			Maximum closing time		80			
Life cycle (time)	Mechanical		20,000					
	Electrical		5,000					
Connections **	Draw-out / Fixed		Horizontal connection		●			-
			Vertical connection		○			●
			Front connection		○			-
			Mixed connection		○			-
Weight (kg)	Draw-out type	Main body	Motor charging type		63/74			70/85
(3P/4P)		(With cradle)	Manual charging type		61/72			68/83
		Cradle only			29/32			33/40
	Fixed type		Motor charging type		34/44			38/47
			Manual charging type		32/42			36/45
External dimensions (mm)	Draw-out		3P		430×334×375			
(H×W×D)	type		4P		430×419×375			
	Fixed type		3P		300×300×295			
			4P		300×385×295			
Trip relay			N, A, P, S type					
Certificate & Approval			KS / KEMA / KERI / GOST / CCC					
Marine classification			LR, ABS, DNV, KR, BV, GL, RINA, NK					

* Refer to trip relay specification. ** ●: Standard, ○: Option

Note) 1. Life time means not guarantee, but limitation.

Quality guarantee: On/Off frequency on the basis of IEC60947-2 within the term of guarantee

2. In case of Marine ACB, please contact us.

3. The use of AN-D, AS-D, AH-D and AS-F in IT systems is limited to 500 V network voltage.

4. AH-20D, AH-40E types are equipped with vertical-only terminals.



AH-E								
AH-06E	AH-08E	AH-10E	AH-13E	AH-16E	AH-20E	AH-25E	AH-32E	AH-40E
630	800	1000	1250	1600	2000	2500	3200	4000
630	800	1000	1250	1600	2000	2500	3200	4000
(0.4 ~ 1.0) × In max								
630	800	1000	1250	1600	2000	2500	3200	4000
1,000								
690								
12								
50/60								
3/4								
100								
100								
85								
100%								
220								
220								
187								
85								
75								
65								
40								
80								
15,000								
5,000								
●								-
○								●
○								-
○								-
87/103								107/139
85/101								102/145
44/55								65/85
44/55								61/81
42/53								60/80
430×412×375								
430×527×375								
300×378×295								
300×493×295								
N, A, P, S type								
KS / KEMA / KERI / GOST / CCC								
LR, ABS, DNV, KR, BV, GL, RINA, NK								

AH-G		
AH-40G	AH-50G	AH-63G
4000	5000	6300
4000	5000	6300
(0.4 ~ 1.0) × In max		
4000	5000	6300
1,000		
690		
12		
50/60		
3/4		
150		
150		
100		
100%		
330		
330		
220		
100		
85		
75		
40		
80		
10,000		
2,000		
○		-
●		-
-		-
-		-
181/223		186/230
179/221		184/228
97/117		102/124
98/123		103/130
96/121		101/128
460×785×375		
460×1015×375		
300×751×295		
300×981×295		
N, A, P, S type		
KS / KEMA / KERI / GOST / CCC		
LR, ABS, DNV, KR, BV, GL, RINA, NK		

※ Derating of the rated current is required according to the ambient temperature around the breaker in a panel if it is higher than the reference value. (See pages 123 to 126)

Susol ACB (up to 1150Vac)




Rating

Characteristics	
Number of poles	(P)
Rated operational voltage (Ue)	(Vac)
Rated insulation voltage (Ui)	(V)
Rated impulse withstand voltage (Uimp)	(kV)
Version	
Suitability for isolation	
Degree of pollution	IEC60661-1
Certification	

Brand name	
Model	
Ampere frame	(AF)
Rated current (In max)	(A)
Rated ultimate breaking capacity (Icu)	1150V (kA)
	1000V (kA)
	900V (kA)
	800V (kA)
Rated service breaking capacity (Ics)	(% Icu)
Rated short-time withstand current (Icw)	1s (kA)
	3s (kA)
Rated making capacity (Icm)	(kA)
Selectivity category (according to IEC 60947-2)	
Operation time (ms)	Total Breaking time < Icw
	>= Icw
Closing time	

Mechanical and Electrical Life cycle	
Endurance (times) (Without maintenance)	Mechanical
	Electrical

Dimension and Weight			
Weight (3P/4P)	Draw-out	Without cradle	(kg)
		With cradle	(kg)
External Dimensions (H×W×D)	Fixed		(kg)
	Draw-out	3P(4P)	(mm)
	Fixed	3P(4P)	(mm)

3 / 4
~ 1150
1250
12kV
Fixed / Withdrawable

3
CB certification according to IEC 60947-2

Susol AV					
AV-06D	AV-08D	AV-10D	AV-13D	AV-16D	AV-20D
630	800	1000	1250	1600	2000
200	400	630	630	800	1000
400	630	800	800	1000	1250
630	800	1000	1000	1250	1600
			1250	1600	2000
30					
42					
50					
50					
100					
30					
30					
63					
B					
max. 75					
max. 25					
max. 80					

12,500
1,000
37/45
70/85
34/44
430×334(419)×375
300×300(385)×295

* AV series are applicable for IT system




3 / 4

~ 1150

1250

12kV

Fixed / Withdrawable



3

CB certification according to IEC 60947-2

Susol AV

AV-06E	AV-08E	AV-10E	AV-13E	AV-16E	AV-20E	AV-25E	AV-32E	AV-40E
630	800	1000	1250	1600	2000	2500	3200	4000
400	400	630	630	800	1000	1250	1600	2000
630	630	800	800	1000	1250	1600	2000	2500
	800	1000	1000	1250	1600	2000	2500	3200
			1250	1600	2000	2500	3200	4000

50

65

75

75

100

50

50

105

B

max. 75

max. 25

max. 80

12,500

1,000

44/49

88/104

45/56

430×412(527)×375

300×378(493)×295

Susol ACB (up to 900Vac)




Rating

Characteristics	
Number of poles	(P)
Rated operational voltage (Ue)	(Vac)
Rated insulation voltage (Ui)	(V)
Rated impulse withstand voltage (Uimp)	(kV)
Version	
Suitability for isolation	
Degree of pollution	IEC60661-1
Certification	

Brand name	
Model	
Ampere frame	(AF)
Rated current (In max)	(A)
Rated ultimate breaking capacity (Icu)	900V (kA)
Rated service breaking capacity (Ics)	800V (kA)
Rated short-time withstand current (Icw)	1s (kA)
	3s (kA)
Rated making capacity (Icm)	(kA)
Selectivity category (according to IEC 60947-2)	
Operation time (ms)	Total Breaking time < Icw
	≥ Icw
	Closing time

Mechanical and Electrical Life cycle	
Endurance (times) (Without maintenance)	Mechanical
	Electrical

Dimension and Weight	
Weight (3P/4P)	Draw-out Without cradle (kg)
	With cradle (kg)
	Fixed (kg)
External Dimensions (H×W×D)	Draw-out 3P(4P) (mm)
	Fixed 3P(4P) (mm)

3 / 4
~ 900
1000
12kV
Fixed / Withdrawable

3
CB certification according to IEC 60947-2

Susol AW					
AW-06D	AW-08D	AW-10D	AW-13D	AW-16D	AW-20D
630	800	1000	1250	1600	2000
200	400	630	630	800	1000
400	630	800	800	1000	1250
630	800	1000	1000	1250	1600
			1250	1600	2000
			42		
			50		
			100		
			42		
			42		
			88.2		
			B		
			max. 75		
			max. 25		
			max. 80		

20,000
1,000
37/45
70/85
34/44
430×334(419)×375
300×300(385)×295



3 / 4

~ 900

1000

12kV

Fixed / Withdrawable



3

CB certification according to IEC 60947-2

Susol AW

AW-06E	AW-08E	AW-10E	AW-13E	AW-16E	AW-20E	AW-25E	AW-32E	AW-40E
630	800	1000	1250	1600	2000	2500	3200	4000
400	400	630	630	800	1000	1250	1600	2000
630	630	800	800	1000	1250	1600	2000	2500
	800	1000	1000	1250	1600	2000	2500	3200
			1250	1600	2000	2500	3200	4000

50

65

100

50

50

105

B

max. 75

max. 25

max. 80

10,000

1,000

44/49

88/104

45/56

430 × 412(527) × 375

300 × 378(493) × 295

Susol Compact ACB (up to 800Vac)




Fixed type



Draw-out type

Rating

Characteristics			
Number of poles		(P)	
Rated operational voltage (Ue)		(Vac)	
Rated insulation voltage (Ui)		(V)	
Rated impulse withstand voltage (Uimp)		(kV)	
Version			
Suitability for isolation			
Degree of pollution	IEC60661-1		
Certification			
Brand name			
Model			
Ampere Frame		(AF)	
Rated current (In max)		(A)	
Rated ultimate breaking capacity (Icu)	800V	(kA)	
Rated service breaking capacity (Ics)		(% Icu)	
Rated short-time withstand current (Icw)	1s	(kA)	
	3s	(kA)	
Rated making capacity (Icm)		(%)	
Selectivity category (according to IEC 60947-2)			
Operation time (ms)	Total Breaking time	< Icw	
		≥ Icw	
	Closing time		
Mechanical and Electrical Life cycle			
Endurance (times) (Without maintenance)	Mechanical		
	Electrical		
Dimension and Weight			
Weight	Draw-out (3P/4P)	(kg)	
	Fixed (3P/4P)	(kg)	
External Dimensions (H×W×D)	Draw-out	3P	(mm)
		4P	(mm)
	Fixed	3P	(mm)
		4P	(mm)

	3 / 4	
	~ 800	
	1000	
	12kV	
	Fixed / Withdrawable	
		
	3	
	CB certification according to IEC 60947-2	
	Susol AW	
	AW-08C	AW-16C
	800	1600
	400	800
	630	1000
	800	1250
		1600
	40	
	100	
	40	
	40	
	84	
	B	
	max. 75	
	max. 25	
	max. 80	
	12,500	
	500	
	22/26	
	16/19.5	
	W: 256 D: 274.5 ¹⁾ H: 364.3	
	W: 326 D: 274.5 ¹⁾ H: 364.3	
	W: 272.4 D: 198.5 ¹⁾ H: 322	
	W: 342.4 D: 198.5 ¹⁾ H: 322	

¹⁾ Exclude terminal length

* AW-08/16C are applicable for IT system

Susol Compact ACB (1600A)



Fixed type

Draw-out type

Rating

Common characteristics		
Number of poles	(P)	
Frequency	(Hz)	
Rated operational voltage	(V, Ue)	
Rated insulation voltage	(V, Ui)	
Rated impulse withstand voltage	(kV, Uimp)	
Circuit breaker as per IEC60947-2		
Type		
Description		
Ampere Frame	(AF)	
Rated current (In Max.) at 40°C	(A)	
	(A)	
	(A)	
	(A)	
	(A)	
	(A)	
Rated current of neutral pole	(A)	
Rated breaking capacity (Icu)	(kA)	AC 690V/600V/550V
		IEC60947-2 AC 500V/480V/460V
		AC 415V/380V/220V
Rated service breaking capacity (Ics)	(kA, %×Icu)	
Rated making capacity (Icm)	(kA)	
Rated Short-time capacity (Icw)	(kA)	1sec/3sec
Operating time (t)	(ms)	Total breaking time
		Closing time
Common mechanical and electrical life cycle		
Life cycle	(time)	Mechanical
		Electrical
Common dimension and weight		
Weight	(kg)	Draw-out type (3P/4P)
		Fixed type (3P/4P)
		Cradle (3P/4P)
Dimension	(mm)	Draw-out type
		3P
		4P
		Fixed type
		3P
		4P

3P/4P					
50/60Hz					
690V					
1000V					
12kV					
AN/AH/AR-C					
AN-08C	AN-16C	AH-08C	AH-16C	AR-08C	AR-10C
800	1600	800	1600	800	1000
400	-	400	-	400	-
630	-	630	-	630	-
800	800	800	800	800	800
-	1000	-	1000	-	1000
-	1250	-	1250	-	-
-	1600	-	1600	-	-
100%					
42		50			-
42		50		130 ¹⁾	
50		60		150	
100%					
88.2		105		17 ²⁾	
42/25		50/30		10 ³⁾	
40					
80					
				12,500	5,000
				6,000	3,000
16/19.5					
16/19.5					
22/26					
W: 256 D: 269.5 ⁴⁾ H: 364.3					
W: 326 D: 269.5 ⁴⁾ H: 364.3					
W: 272.4 D: 198.5 ⁴⁾ H: 322					
W: 342.4 D: 198.5 ⁴⁾ H: 322					

1) 130kA/460V, 100kA/500V 2) at 500V 3) 0.5sec 4) Exclude terminal length

Susol UL ACB



Type						
AF						
Rated current (CT Ratio)	(A)			at 40°C		
Rated current	(V)			at 40°C		
(Available Rating plug)						
Rated maximum voltage	(V)					
Frequency	(Hz)					
Number of poles	(P)					
Type of trip relay (Electronic trip device)						
Rated short circuit current (Sym.) (Duty: O-15s-CO)	(kA)	With instantaneous	AC	730V(60Hz) 635V 508V 254V		
			AC	730V(60Hz) 635V 508V 254V		
		Without instantaneous	AC	730V(60Hz) 635V 508V 254V		
			AC	730V(60Hz) 635V 508V 254V		
Rated making current (X/R=more than 6.6)	(kA peak)	With instantaneous	AC	730V(60Hz) 635V 508V 254V		
			AC	730V(60Hz) 635V 508V 254V		
		Without instantaneous	AC	730V(60Hz) 635V 508V 254V		
			AC	730V(60Hz) 635V 508V 254V		
Rated short time current	(kA)		AC			
Operating time (t)	(ms)	Breaking time				
		Opening time				
		Closing time				
		Charging time				
Endurance Rating C/O Cycles (with no maintenance)	(Cycles)	Mechanical		12,500		
		Electrical		2,800		
Weight (Include Charging motor)	lb (kg)	Drawout type	Main Body with Cradle	3P 4P		
			Only Cradle	3P 4P		
			Fixed type	3P 4P		
		External dimension	Draw-out type	in (mm)	H×W×D	3P 4P
					H×W×D	3P 4P
				in (mm)	H×W×D	3P 4P
Enclosure dimension	in (mm)	H×W×D	3P	4P		
			3P	4P		
Certified Standards						

Susol	
UAS-□□□	
08	16
800	1600
400	800
600	1000
630	1200
800	1250
	1600
254V / 508V / 635V / 730V(UAW)	
UAS/UAH : 50/60, UAW : 60	
3P / 4P	
N, A, P, S (4 type)	
	-
	65
	85
	85
	-
	65
	65
	65
	-
	149.5
	195.5
	195.5
	-
	149.5
	150.5
	151.5
	60
	Less than 30ms
	Less than 50ms
	Less than 80ms
	Less than 5 sec.
	12,500
	2,800
	154 (70)
	187 (85)
	71 (32)
	84 (38)
	77 (35)
	99 (45)
	16.93×13.15×16.02 (430×334×407)
	16.93×16.50×16.02 (430×419×407)
	11.81×11.81×11.61 (300×300×295)
	11.81×15.16×11.61 (300×385×295)
	19.69×15.75×13.39 (500×400×340)
	19.69×19.69×13.39 (500×500×340)
	UL 1066 / ANSI C37.13





Susol				
UAH-□□□ / UAW-□□□				
08	16	20	25	32
800	1600	2000	2500	3200
400	800	1000	1200	1600
600	1000	1200	1250	2000
630	1200	1250	1600	2500
800	1250	1600	2000	3000
	1600	2000	2500	3200
254V / 508V / 635V / 730V(UAW)				
UAS/UAH : 50/60, UAW : 60				
3P / 4P				
N, A, P, S (4 type)				
		85		
		85		
		100		
		100		
		85		
		85		
		85		
		85		
		195.5		
		195.5		
		230		
		230		
		195.5		
		195.5		
		195.5		
		195.5		
		85		
		Less than 30ms		
		Less than 50ms		
		Less than 80ms		
		Less than 5 sec.		
	12,500		5,000	
	2,800		1,000	
	214 (97)	245 (111)	326 (148)	
	269 (122)	309 (140)	414 (188)	
	99 (45)	123 (56)	205 (93)	
	121 (55)	152 (69)	256 (116)	
	101 (46)	110 (50)	196 (89)	
	126 (57)	137 (62)	249 (113)	
	16.93×16.22×16.02 (430×412×407)			
	16.93×20.75×16.02 (430×527×407)			
	11.81×14.88×11.61 (300×378×295)			
	11.81×19.41×11.61 (300×493×295)			
	19.69×19.69×13.39 (500×500×340)			
	19.69×24.21×13.39 (500×615×340)			
	UL 1066 / ANSI C37.13			

Susol				
UAH-□□□				
32	40	50	60	
3200	4000	5000	6000	
1600	2000	2500	3000	
2000	2500	3000	3200	
2500	3000	3200	3600	
3000	3200	3600	4000	
3200	3600	4000	5000	
	4000	5000	6000	
254V / 508V / 635V / 730V(UAW)				
UAS/UAH : 50/60, UAW : 60				
3P / 4P				
N, A, P, S (4 type)				
		-		
		100		
		130		
		130		
		-		
		100		
		100		
		100		
		-		
		230		
		299		
		299		
		-		
		230		
		230		
		230		
		100		
		Less than 30ms		
		Less than 50ms		
		Less than 90ms		
		Less than 5 sec.		
		5,000		
		1,000		
		489 (222)		
		626 (284)		
		276 (125)		
		355 (161)		
		227 (127)		
		287 (130)		
	18.11×30.91×16.02 (460×785×407)			
	18.11×39.96×16.02 (460×1015×407)			
	11.81×29.57×11.61 (300×751×295)			
	11.81×38.62×11.61 (300×981×295)			
	31.50×32.48×13.39 (800×825×340)			
	31.50×41.54×13.39 (800×1055×340)			
	UL 1066 / ANSI C37.13			

UL Compact ACB(1200A)



Fixed type



Draw-out type

Rating

Common characteristics			
Rated operational voltage, Ue		(V)	
Rated insulation voltage, Ui		(V)	
Frequency		(Hz)	
Rated impulse withstand voltage, Uimp		(kV)	
Number of poles		(P)	
Type			
Description			
Ampere Frame		(AF)	
Rated current (In Max.) at 40°C		(A)	
		(A)	
		(A)	
		(A)	
		(A)	
Rated current of neutral pole		(A)	
Interrupting Ratings	UL489	AC 800V	(kA)
		AC 600V	(kA)
		AC 480V	(kA)
		AC 240V	(kA)
Rated short time current, Icw		(kA)	
Operating time	Closing Time		(ms)
	Total breaking time	(≥ Icw)	(ms)
		(< Icw)	(ms)
Common mechanical and electrical life cycle			
Endurance	Mechanical		(time)
	Electrical (30 cycle/Hr)	~ AC 600V	(time)
		AC 800V	(time)
Dimension and Weight			
Weight (3P/4P)	Drawout (3P/4P) (without cradle)		(kg)
	Fixed (3P/4P)		(kg)
Dimension	Draw-out type	3P	(mm)
		4P	(mm)
	Fixed type	3P	(mm)
		4P	(mm)

AC 800V							
1000V							
50/60Hz							
12kV							
3P/4P							
Type	Circuit breaker				Switch		
	UAN		UAS		UAA-08C	UAA-12C	
Description	UAN-08C	UAN-12C	UAS-08C	UAS-12C	800	1200	
Ampere Frame	800	1200	800	1200	800	1200	
Rated current (In Max.) at 40°C	400	-	400	-	800	1200	
	630	-	600	-	-	-	
	800	800	800	800	-	-	
	-	1000	-	1000	-	-	
	-	1200	-	1200	-	-	
Rated current of neutral pole	100%						
Interrupting Ratings	-		42		42		
	42		50				
	50		50				
	50		65				
Rated short time current, Icw	42						
Operating time	≤ 80				≤ 80		
	≤ 25				≤ 40**		
	≤ 75						
Common mechanical and electrical life cycle							
Endurance	12,500						
	6,000						
	500						
Dimension and Weight							
Weight (3P/4P)	21/25.5				19.5/24.5		
	16.0/19.5				15.5/19.0		
Dimension	Draw-out type	W:256 D:274.5* H:364.3					
		W:326 D:274.5* H:364.3					
	Fixed type	W:272.4 D:198.5* H:322					
		W:342.4 D:198.5** H:322					

* exclude terminal length

** Operation time is by shunt coil not Trip unit

VCB

Vacuum Circuit Breakers

Vacuum Circuit Breaker, VCB is installed in the medium voltage distribution lines to protect life and load equipment. In case of accidents such as over current, short circuit and ground fault current, VCB works by interrupting the circuit through the inner Vacuum Interrupter which is acted by signal from the outside separate relay.

Suitable for use as the main circuit breaker to protect key installations in the places such as device industry, power plants, high-rise buildings, large ships.

- ▶ **Strengthening of the high interrupting capacity and large current models and full line-up new VCB models to high/middle/low.**
- ▶ **Main circuit structure with high reliability.**
 - Maximizing the durability and reliability of the main circuit contactors (Stego Tulip contactor).
 - Strong structure for the temperature rise (Natural cooling system).
- ▶ **Convenience of switchgear configuration and a variety of accessories.**
 - CB compartment structure: Metal isolation structures to prevent the accident spread and ensure safety. And the convenience of switchgear building is extended by its module style.
 - A variety of accessories: UVT, Locking Magnet, Plug Interlock, Key lock, Temperature Sensor, MOC, TOC, Earthing S/W.
 - Maximizing compatibility with existing products through the dualistic deployment of phases and compact models.

※ Type testing is complete for all models according to latest standard, IEC62271-100 (2012) [M2, E2 (List1 or 3), C2].





Susol VCB Family

Susol VCB series are premium-type products featuring main structure with high reliability application and a variety of accessories and ability to maximize to be suitable for use as the main circuit breaker to protect key installations in the places such as device industry, power plants, high-rise buildings, large ships



7.2kV (VL-06)

- Rated short-time (for withstand current) : 3sec.
- Rated operating sequence: O-0.3s-CO-15s-CO
- Type test level: M2, E2 (List1), C2
- 100% Compatibility
 - with existing fixed type breakers
 - with existing drawout type breakers
- Various cradle: E, F and G type
- A variety of control power
 - DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V
 - AC 48V, AC 100~130V, AC 220~250V
- A variety of accessories
 - Charge switch, UVT, Secondary trip Coil, Current trip coil, Trip Latch Checking S/W, Position S/W
 - Key-lock, Button lock, Button cover, Padlock, UVT, Time Delay Controller, Lifting hook, CTD
- Anti Pumping Device
- TEST/SERVICE Automatic Position Indicator
- Standards and certification
 - IEC62271-100 (2012) [M2, C2, E2 (List1)]
 - Tested in enclosure
 - KERI type tested, V-check (KESCO) certification



Ur (kV)	Isc (kA)	Ir (A)
7.2	8	400
	12.5	630

Full line-up & Compact

Full line-up new VCB models to the high interrupting capacity and large current (~ 50kA, ~ 5000A) featuring maximization of compatibility with existing products through the dualistic deployment of phases and compact models

7.2/12/17.5/24/25.8/36kV (VL-06/12/17/20/25/36)

7.2/12/17.5/24/25.8/36kV (VH-06/12/17/20/25/36)

- Rated short-time (to withstand current): 3sec. 4sec*
- Rated operating sequence: O-0.3s-CO-15s-CO, (O-0.3s-CO-3min-CO**)
- Type test level: M2, E2 (List3), C2
- Compatibility with existing Pro-MEC breakers
- Various cradle: E, F, G and H type
- CB Compartment for MCSG available
- A variety of control power
 - DC 24~30V, DC 48~60V, DC 110V, DC 125V, DC 220V
 - AC 48V, AC 100~130V, AC 220~250V
- A variety of accessories
 - VCB part: Charge switch, UVT, Secondary trip coil, Latch checking switch, Position switch, Locking magnet, Plug interlock, Key lock, Button cover, Button padlock, Padlock (H type Door interlock), MOC
 - Cradle part: MOC (Mechanical Operated Cell switch), TOC (Truck Operated Cell switch), Temperature sensor, Earthing switch & accessories, Door, Door interlock, Door emergency button
 - Others: Racking in/out handle, UVT Time delay controller, CTD (Condensor Trip Device), Temperature module
- Anti Pumping Device
- TEST/SERVICE Automatic Position Indicator
- Standards and certification
 - IEC62271-100 (2012) [M2, C2, E2 (List3)]
 - KEMA, KERI type tested, V-check (KESCO) certification

Note) * Please contact us
 ** Please refer to the ratings.



Ur (kV)	Isc (kA)	Ir (A)
7.2	20	630
		1250
	25	630
		1250
	31.5	630
		1250
12	20	630
		1000
	25	630
		1000
	31.5	630
		1250
17.5	20	630
		1250
	25	630
		1000
	31.5	630
		1250
24, 25.8	12.5	630
		1250
	16	630
		1250
	25	630
		1250
36	25	630
		1250
		2000
		2500

- Rated short-time (to withstand current): 3sec. 4sec*
- Rated operating sequence: O-0.3s-CO-3min-CO
- Type test level: M2, E2 (List3), C2
- Electrical and mechanical life: 20,000 operations
- Various cradle: K and H type
- CB Compartment for MCSG available
- A variety of control power
 - DC 48V, DC 110V, DC 125V, DC 220V
 - AC 48V, AC 110V, AC 220V
- A variety of accessories
 - VCB part: UVT, Secondary trip coil, Latch checking switch, Position switch, Locking magnet, Plug interlock, Key lock, Button cover, Button padlock, Padlock (H type Door interlock), MOC
 - Cradle part: MOC (Mechanical Operated Cell switch), TOC (Truck Operated Cell switch), Temperature sensor, Earthing switch & accessories, Door, Door interlock, Door emergency button
 - Others: Racking in/out handle, Lifting hook, UVT Time delay controller, CTD (Condensor Trip Device), Temperature module
- Anti Pumping Device
- Standards and certification
 - IEC62271-100 (2012) [M2, C2, E2 (List3)]
 - KEMA, KERI type tested, V-check (KESCO) certification

Note) * Please contact us




Ur (kV)	Isc (kA)	Ir (A)
7.2	31.5	1250
		2000
	40	1250
		2000
	50	1250
		2000
12	31.5	1250
		2000
	40	1250
		2000
	50	1250
		2000
17.5	31.5	1250
		2000
	40	1250
		2000
	50	1250
		2000
24, 25.8	25	2500
		3150
	31.5	1250
		2000
	40	1250
		2000
36	25	1250
		2000
	31.5	1250
		2000
	40	1250
		2000



VCB Cradle type

Memo



MS

Contactors and Overload relays

Sealed structure has improved its safety features so that no arc flash is exposed. In order to emphasize its durability as an industrial device, Metasol series adopt simple design form and sophisticated shape applying diamond cut concepts on product surface.

- Advanced technology & Expert solution
 - Offering economical solution with compact size & easy connection
 - Ensure reliability in the system: Type II Coordination
 - Perfect system with peripheral devices
 - Environment friendly product: complies with International environment standard RoHS
 - 25Models in 9 Frames
-
- Compact design for space saving
 - DIN rail and screw mountable (upto 150AF)
 - Finger-proof design
 - World class products conforming to IEC and UL standards



Metasol Contactors

MC type Magnetic Contactors



Frame size				18AF				22AF				
Type	Screw clamp terminals			●	●	●	●	●	●	●	●	
	Lug clamp terminals			-	-	-	-	-	-	-	-	
Number of poles				3P				3P				
Rated operational voltage, Ue				690V				690V				
Rated insulation voltage, Ui				690V				690V				
Rated frequency				50/60Hz				50/60Hz				
Rated impulse withstand voltage, Uimp				6kV				6kV				
Maximum operating rate in operating cycles per hour(AC3)				1,800 operations per hour				1,800 operations per hour				
Durability (mil. operations)	Mechanical			1500				1500				
	Electrical			250				250				
Current and power (IEC)	AC-1, Thermal current	A		25	25	25	32	25	27	32	45	
		kW		2.2	2.5	3.5	4.5	2.5	3.5	4.5	5.5	
	AC-3	200/240V	A	9	11	13	18	11	13	18	22	
		kW		3	4	5.5	7.5	4	5.5	7.5	11	
	380/440V	A		7	9	12	18	9	12	18	22	
		kW		3	4	7.5	7.5	4	7.5	7.5	15	
	500/550V	A		6	7	12	13	7	12	13	20	
		kW		3	4	7.5	7.5	4	7.5	7.5	15	
	690V	A		4	5	9	9	6	9	9	18	
		kW		-	-	-	-	-	-	-	-	
1000V	A		-	-	-	-	-	-	-	-		
	kW		-	-	-	-	-	-	-	-		
Rated Short-time withstand current (IEC 60947)	1s	A		210	250	280	300	250	280	300	400	
	10s	A		105	110	120	130	110	120	154	186	
	30s	A		70	70	80	85	70	80	100	130	
	1min	A		61	61	61	70	61	61	84	90	
	3min	A		40	45	47	50	45	50	60	60	
	10min	A		30	30	30	40	30	30	40	50	
Rating (UL)	Continuous current	A		25	25	25	32	25	25	40	40	
		HP		0.5	0.5	0.75	1	0.5	0.75	1	2	
	Single phase	110~120V	HP		1.5	1.5	2	3	1.5	2	3	3
		220~240V	HP		2	2	3	7.5	2	3	7.5	7.5
	Three phase	200~208V	HP		3	3	5	7.5	3	5	7.5	10
		220~240V	HP		5	5	7.5	10	5	7.5	10	15
	440~480V	HP		7.5	7.5	10	15	7.5	10	15	20	
	550~600V	HP		00	00	0	1	00	0	1		
NEMA size				0.33				0.34				
				45×73.5×80.4				45×73.5×87.4				
Size and weight	AC control	Weight	kg	0.4				0.41				
		Size(W×H×D)	mm	45×73.5×96.6				45×73.5×103.6				
DC control	Weight	kg										
		Size(W×H×D)	mm									
Auxiliary(standard)				1NO or NC				1NO1NC				
Auxiliary	Side mount			UA-1				UA-1				
	Front mount			UA-2, UA-4				UA-2, UA-4				



40AF	
MC-32a	MC-40a
•	•
-	-
3P	
1000V	
1000V	
50/60Hz	
8kV	
1,800 operations per hour	
1200	
200	
55	60
7.5	11
32	40
15	18.5
32	40
18.5	22
28	32
18.5	22
20	23
22	22
17	17
600	700
260	300
160	190
100	120
70	80
55	65
50	60
50	60
2	3
5	7.5
7.5	15
10	15
20	30
25	30
1P	2
0.55	
69×83×90	
0.77	
69×83×117.1	
2NO2NC	
UA-1	
UA-2, UA-4	

65AF	
MC-50a	MC-65a
•	•
•	•
3P	
1000V	
1000V	
50/60Hz	
8kV	
1,200 operations per hour	
1200	
200	
100	115
15	18.5
55	65
22	30
50	65
30	33
43	60
30	33
28	35
30	30
23	23
1000	1050
550	700
330	380
250	270
150	200
90	120
87	96
70	100
3	5
10	15
20	25
25	30
40	50
50	60
1.05	
79×106×119	
1.3	
79×106×146.4	
2NO2NC	
UA-1	
UA-2, UA-4	

100AF		
MC-75a	MC-85a	MC-100a
•	•	•
•	•	•
3P		
1000V		
1000V		
50/60Hz		
8kV		
1,200 operations per hour		
1200		
200		100
125	135	160
22	25	30
75	85	105
37	45	55
75	85	105
37	45	55
64	75	85
37	45	55
42	45	65
37	37	37
28	28	28
1100	1200	1320
750	800	900
400	450	500
300	350	400
220	270	270
140	170	180
114	150	160
110	135	160
5	7.5	10
15	15	20
25	30	30
30	40	40
50	60	75
60	75	75
1.93		
94×140×135.8		
2.8		
94×140×172.3		
2NO2NC		
UA-1		
UA-2, UA-4		

150AF	
MC-130a	MC-150a
•	•
•	•
3P	
1000V	
1000V	
50/60Hz	
8kV	
1,200 operations per hour	
500	
100	
200	250
37	45
130	150
60	75
130	150
60	70
90	100
55	55
60	60
75	75
50	50
1350	1800
950	1200
700	800
550	600
350	450
200	300
175	280
200	250
10	15
20	25
40	40
40	50
75	100
75	75
2.4	
119×158×130.3	
2NO2NC	
UA-1	
UA-2, UA-4	

Metasol Contactors

MC type Magnetic Contactors



Frame size				225AF		400AF		
Type	Screw clamp terminals			MC-185a	MC-225a	MC-265a	MC-330a	MC-400a
	Lug clamp terminals			-	-	-	-	-
Number of poles				3P		3P		
Rated operational voltage, Ue				1000V		1000V		
Rated insulation voltage, Ui				1000V		1000V		
Rated frequency				50/60Hz		50/60Hz		
Rated impulse withstand voltage, Uimp				8kV		8kV		
Maximum operating rate in operating cycles per hour(AC3)				1,200 operations per hour		1,200 operations per hour		
Durability (mil. operations)	Mechanical			500		500		250
	Electrical			100		100		50
Current and power (IEC)	AC-1, Thermal current	A		300	350	400	500	520
		kW		55	75	80	90	125
	AC-3	200/240V	kW	185	225	265	330	400
		A		185	225	265	330	400
	380/440V	kW		90	132	147	160	200
		A		185	225	265	330	400
	500/550V	kW		110	132	147	160	225
		A		180	200	225	280	350
	690V	kW		110	140	160	200	250
		A		120	150	185	220	300
1000V	kW		132	132	147	147	147	
	A		90	90	105	105	105	
Rated Short-time withstand current (IEC 60947)	1s	A	2000	2500	3500	4000	4600	
	10s	A	1500	1700	2400	3000	4400	
	30s	A	1000	1200	1500	2500	2974	
	1min	A	800	1000	1100	1700	1846	
	3min	A	520	700	800	1000	1313	
	10min	A	350	500	600	620	760	
Rating (UL)	Continuous current		A	300	350	400	500	520
	Single phase	110~120V	HP	15	15	-	-	-
		220~240V	HP	30	40	-	-	-
	Three phase	200~208V	HP	60	60	75	100	125
		220~240V	HP	60	75	100	100	150
		440~480V	HP	125	150	200	200	300
	550~600V	HP	125	150	200	200	300	
NEMA size					5			
Size and weight	AC control	Weight	kg	5.4		9.2		
		Size(W×H×D)	mm	138×203×185.1		163×243×204.4		
weight	DC control	Weight	kg					
		Size(W×H×D)	mm					
Auxiliary(standard)				2NO2NC		2NO2NC		
Auxiliary	Side mount			AU-100, AU-100E (Max.4NO4NC)		AU-100, AU-100E (Max.4NO4NC)		
	Front mount			-		-		

Metasol Contactors



MC type Magnetic Contactors (4pole)

Frame size				18AF			
				MC-6a/4	MC-9a/4	MC-12a/4	MC-18a/4
Type	Screw clamp terminal			●			
Number of poles				4P			
Rated operational voltage (Ue)				690V			
Rated insulation voltage (Ui)				690V			
Rated frequency				50/60Hz			
Rated impulse withstand voltage, Uimp				6kV			
Maximum operating rate in operating cycles per hour(AC3)				1,800 operations per hour			
Durability	Mechanical			1500			
	Electrical			50		80	
Current and Power (IEC)	Thermal current		A	25	25	25	40
	AC-1	200/240V	kW	9	9	9	15
			A	25	25	25	40
		380/400V	kW	17	17	17	27
			A	25	25	25	40
		500/550V	kW	21	21	21	35
			A	25	25	25	40
		690V	kW	27	27	27	44
			A	25	25	25	40
UL rating (UL)	Continuous current		A	25	25	25	32
	Single	110~120V	HP	0.5	0.5	0.75	1
	Phase	220~240V	HP	1.5	1.5	2	3
	Three	200~208V	HP	2	2	3	7.5
	Phase	220~240V	HP	3	3	5	7.5
		440~480V	HP	5	5	7.5	10
		550~600V	HP	7.5	7.5	10	15
Size and weight	AC	Weight	kg	0.33			
	Control	Size(W×H×D)	mm	45×73.5× 80.4			
	DC	Weight	kg	0.4			
	Control	Size(W×H×D)	mm	45×73.5×96.6			
Auxiliary(standard)				-			
Auxiliary	Side Mount			UA-1			
	Front Mount			UA-2, UA-4			





22AF	40AF		85AF			
MC-22a/4	MC-32a/4	MC-40a/4	MC-50a/4	MC-65a/4	MC-75a/4	MC-85a/4
●	●		●			
4P	4P		4P			
690V	690V		690V			
690V	690V		1000V			
50/60Hz	50/60Hz		50/60Hz			
6kV	6kV		8kV			
1,800 operations per hour	1,800 operations per hour		1,800 operations per hour			
1500	1500		1200			
100	100		100			
40	50	60	80	100	110	135
15	18	22	30	37	41	51
40	50	60	80	100	110	135
27	35	42	56	70	76	95
40	50	60	80	100	110	135
35	43	52	70	88	97	120
40	50	60	80	100	110	135
44	55	66	88	110	120	150
40	50	60	80	100	110	135
32	45	50	70	80	90	100
2	2	3	3	5	5	7.5
3	5	5	7.5	10	15	15
7.5	7.5	10	10	15	20	25
7.5	10	10	15	20	25	30
10	20	25	30	40	50	50
15	20	25	30	40	50	50
0.4	0.59		1.2			
47.2×80×86.8	59×83.5×94.5		91×123.5×117.8			
0.5	0.7		1.29			
47.2×80×113.2	59×83.5×121		91×123.5×117.8			
-	-		-			
AU-1	AU-1		AU-1			
UA-2, UA-4	UA-2, UA-4		UA-2, UA-4			

Metasol Contactors



MC type Magnetic Contactors (4pole)

Frame size				225AF				
Type	Screw clamp terminal			MC-100a/4	MC-130a/4	MC-150a/4	MC-185a/4	MC-225a/4
Number of poles				●				
Rated operational voltage (Ue)				4P				
Rated insulation voltage (Ui)				690V				
Rated frequency				1000V				
Rated impulse withstand voltage, Uimp				50/60Hz				
Maximum operating rate in operating cycles per hour(AC3)				8kV				
Durability	Mechanical			1,200 operations per hour				
	Electrical			500				
Current	Thermal current			80				
and Power	AC-1			200	250	275	300	350
(IEC)	200/240V			57	60	76	87	100
				200	250	275	300	350
	380/400V			106	110	142	165	185
				200	250	275	300	350
	500/550V			132	137	180	205	230
				200	250	275	300	350
	690V			165	170	225	255	290
				200	250	275	300	350
UL rating	Continuous current			200	250	275	300	350
(UL)	Single			7.5	10	15	15	15
	Phase			15	20	25	30	40
	Three			30	40	40	60	60
	Phase			30	40	50	60	75
	440~480V			60	75	100	125	150
	550~600V			60	75	100	125	150
Size	AC			5.6				
and weight	Control			175×203×185				
	DC							
	Control							
Auxiliary(standard)				2NO2NC				
Auxiliary	Side Mount			AU-100, AU-100E				
	Front Mount			-				

* - FLA = 722 A, LRA = 5618 A

** - FLA = 566 A, LRA = 4495 A



400AF

MC-265a/4	MC-330a/4	MC-400a/4
●		
4P		
690V		
1000V		
50/60Hz		
8kV		
1,200 operations per hour		
250		
50		
400	500	520
115	135	160
400	500	520
215	250	300
400	500	520
265	315	375
400	500	520
335	390	470
400	500	520
400	500	520
-	-	-
-	-	-
75	100	125
100	125	150
200	200	300
200	200	300

800AF

MC-500a/4	MC-630a/4	MC-800a/4
●		
4P		
690V		
1000V		
50/60Hz		
8kV		
1,200 operations per hour		
250		
50		
700	900	1050
245	255	310
700	900	1050
450	470	570
700	900	1050
560	590	710
700	900	1050
710	740	900
700	900	1050
700	900	1050
-	-	-
-	-	-
150	200	200
200	250	300
400	500	600 *
400	500	600 **

9.9
206×243×205

26.3
346×310 ×244


2NO2NC

AU-100, AU-100E
-

2NO2NC

AU-100, AU-100E
-

Metasol Contactors

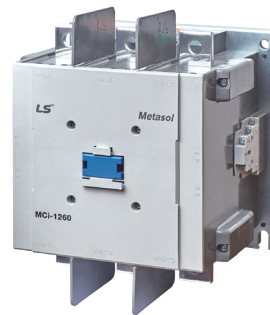


Renewable Magnetic Contactor

- Eco-friendly contact material applied (Cd free)
- Type 2 coordination data with MCCB or ACB

Frame size			
Type	Screw clamp terminals		
Number of poles		pole	
Rated operational voltage (Ue)		Vac	
Rated insulation voltage (Ui)		Vac	
Rated frequency		Hz	
Rated impulse withstand voltage (Uimp)		kV	
Mechanical operating cycle		cycles/hour	
Electrical operating cycle		cycles/hour	
Durability	Mechanical	million	
	Electrical (AC-1@690V)	million	
	Electrical (AC-1@400V)	million	
Current and Power (IEC)	AC-1 1000V 55/60/70°C	A	
	Thermal current	A	
	Heat dissipation	W	
Rated Short-time withstand current(I _{cw}) (IEC 60947)	1s	A	
	10s	A	
	1min	A	
	10min	A	
max. breaking capacity (I _{cd})	400V	A	
	690V	A	
	1000V	A	
Type-2 Coordination (with MCCB or ACB)		kA	
Current and HP (UL)	Thermal current		
	Single phase	110~120V	HP
		220~240V	HP
	Three phase	200~208V	HP
		220~240V	HP
		440~480V	HP
550~600V		HP	
Weight (kg)			
Size (W×H×D)		mm	
Auxiliary(standard)			
Auxiliary	Side Mount		
	Front Mount		

1260AF			
	MCI-900	MCI-1050	MCI-1260
		●	
		3	
		1000	
		1000	
		50/60	
		8	
	600	600	300
	600	600	300
	100	100	50
	26	26	15
	50	50	20
	900/850/700	1050/875/720	1260/1060/900
	900	1050	1260
	100	170	170
	7000	7500	8000
	6400	7000	7200
	3500	3800	4000
	1550	1550	2300
	6000	7500	7500
	5000	7000	7000
	2000	2500	2500
	42kA (Break time: less than 20ms)		
	900	1050	1260
	-	-	-
	-	-	-
	200	200	-
	250	300	-
	500	600	-
	500	600	-
	22.2	22.2	25
	285×310×246	285×310×246	285×352×246
2NO2NC			
	AU-100, AU-100E (max.4NO4NC)		
	-		

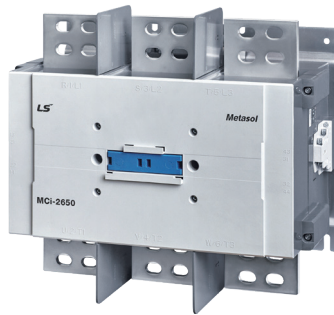

2650AF		
MCI-1700	MCI-2100	MCI-2650
	●	
	3	
	1000	
	1000	
	50/60	
	8	
	300	
300	300	120
50	50	30
5	5	2
5	5	5
1700/1450/1300	2100/1750/1500	2650/2350/2150
1700	2100	2650
220	350	350
	12000	
	10000	
	5500	
	3000	
9000	12000	1200
8000	8500	8500
3000	3150	3150
42kA (Break time: less than 50ms)		
1700	2100	2650
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
34.6	34.6	47
431 × 380 × 246	431 × 380 × 246	431 × 392 × 246
2NO2NC		
AU-100, AU-100E (max.4NO4NC)		
-		

XGIPAM

Characteristics

- Protective use model (F, B, M, T, DG)
- 8.4 inches of color Touch Screen
- Performing 0.2% measurement accuracy for Current and Voltage
- Sag, Swell, Interruption & Harmonic analysis of 1~63rd orders
- Increasing reliability/Flexibility through Duplex communication



Type of Protection

Type	Vsage	Protection
XGIPAM - F	Feeder/Incomming	OCR(50/51), OCGR(50/51N), UVR(27), OVR(59), SGR(67G), DGR(67N) ^{Note} , OVGR(64I/D), NSOVR(47N), POR(47), SYNC Check(25), Reclosing(79), Temperature(38)
XGIPAM - B	Bay controller	OCR(50/51), OCGR(50/51N), UVR(27), OVR(59), SGR(67G), DGR(67N) ^{Note} , OVGR(64I/D), NSOVR(47N), POR(47), SYNC Check(25), Reclosing(79), Temperature(38), DOCR(67I/D), NSOOCR(46I/D), UFR(81U), OFR(81O), DPR(32P), DQR(32Q)
XGIPAM - M	Motor	OCR(50/51), OCGR(50/51N), UVR(27), OVR(59), SGR(67G), DGR(67N) ^{Note} , OVGR(64I/D), NSOVR(47N), POR(47), Temperature(38), Stall/Locked Rotor(48/51LR), THR(49), DOCR(67I/D), UCR(37), NCH(66), NSOOCR(46I/D)
XGIPAM - T	Transformer	OCR(50/51)×2, OCGR(50/51N), UVR(27), OVR(59), Temperature(38), DPR(32P), DFR(87T)
XGIPAM - DG	Distributed Generator	OCR(50/51), OCGR(50/51N), UVR(27), OVR(59), DPR(32P), UPR(37P), DQR(32Q), UFR(81U), OFR(81O), DGR(67N) ^{Note} , SYNC Check(25), DOCR(67I/D), NSOOCR(46I/D), POR(47), NSOVR(47N), ROCOF(81R), SGR(67G), OVGR(64I/D)
XGIPAM - 3wT	Transformer (3 wires)	OCR(50/51)×3, OCGR(50N/51N), UVR(27), OVR(59), OVGR(64I/D), DFR(3W87T)

Note) DGR is the same as DOOCR.

Ratings

Type	Specification		
Wiring	3P3W, 3P4W		
Input	Frequency	60Hz (50Hz *)	
	Voltage	PT: 100 $\sqrt{3}$, 110 $\sqrt{3}$, 120 $\sqrt{3}$, 190 $\sqrt{3}$, 100, 110, 120V GPT: 100~190V	
	Current	CT: 5A, ZCT: 1.5mA	
	Power consumption	Normal: Max. 30W, Operating: Max. 70W	
	Control voltage	AC 110V, DC 110~125V	
	Burden	PT: Max. 0.5VA (Phase PT Standard), CT: Max. 1.0VA Input contact Digital Input, AC/DC 110V	
Output contact	TRIP	Rated	AC 250V 10A / DC 30V 10A, Resistive Load
		Open	AC 2500VA, DC 300W
	ALARM	Close	AC 250V 5A / DC 30V 5A, Resistive Load
		Open	AC 1250VA, DC 150W
Insulation Resistance	Over DC 500V 10M Ω		
Dielectric Strength	Electric circuits to Earth	AC 2kV(1kV) / for 1 min	
	Between electric circuits	AC 2kV(1kV) / for 1 min	
	Between terminals of contact circuit	AC 1kV(1kV) / for 1 min	
Overload withstand	Current circuit	3 In for 3 hours, 20 In for 2 seconde	
	Voltage circuit	1.15Vn for 3 hours	
Fast Transient Disturbance	Power Input 4kV, Other Input 2kV		
Electrostatic Discharge(ESD)	Air 8kV, Contact 6kV		
Operation temperature	-10 $^{\circ}$ C ~ 55 $^{\circ}$ C		
Storage temperature	-25 $^{\circ}$ C ~ 70 $^{\circ}$ C		
Humidity	30% ~ 80%		
Height above sea level	1500m or less		
Others	Non-impact place, Non-air pollution place		
Weight	7kg (HMI: 2kg)		

* Please contact the sales department for 50Hz in parentheses.

Susol RMU

Characteristics

- Applicable to renewable electricity generation (wind, solar)
- Configurable TR Container Pack



Susol RMU

Ratings

Rated voltage	kV	12	17.5	24	36
Rated frequency	Hz	50 / 60	50 / 60	50 / 60	50 / 60
Rated power frequency withstand voltage	kV	28	38	50	70
Rated power frequency withstand voltage	kV	75	95	125	170
Rated current main busbars	A	630	630	630	630
Rated short-time withstand current (3s)	kA	21	21	21	20
Rated short-circuit making current	kA	54.6	54.6	54.6	52
Internal arc fault current (1s, AFAL)	kA	21	21	21	20
Rated SF ₆ gas pressure	Psi.G	5	5	5	5

Applicable type



24kV LFL type



24kV LCL type




24kV Extensible type



36kV LCL type

Susol RMU

12/17.5/24kV CB Feeder Non-Extensible RMU

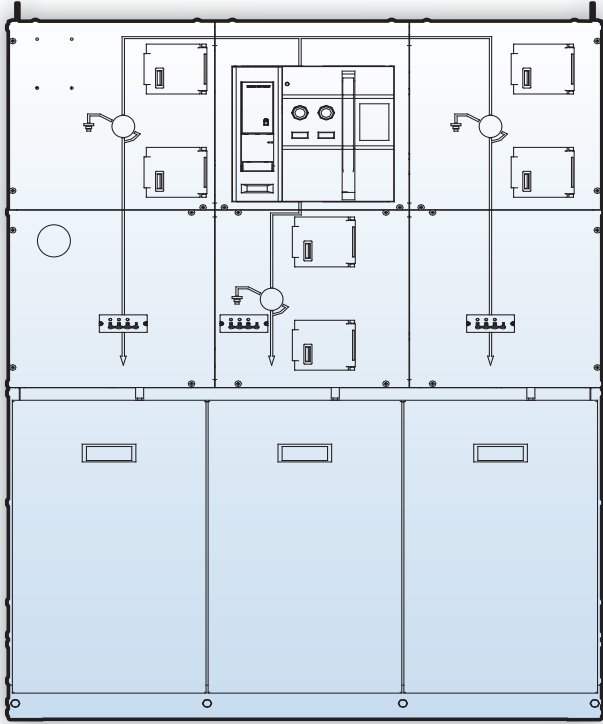


- Consists of two circuit LBS and one circuit CB-DS in a single chamber
- Protects equipment using Circuit Breaker
- Complete Sealing System
- Increases durability through S/S application
- L: Load break switch
- C: Vacuum circuit breaker


Applicable type

[W×H×D, mm]


RC (1R1C)

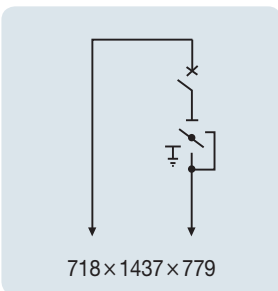


LC (1L1C)

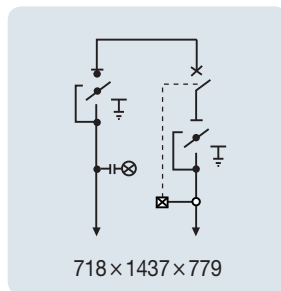


LCL (2L1C)

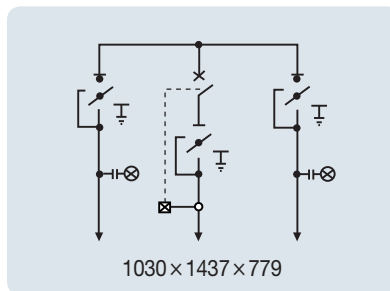


LLCL (3L1C)

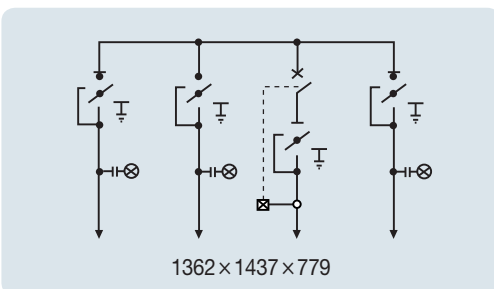

LCCL (2L2C)

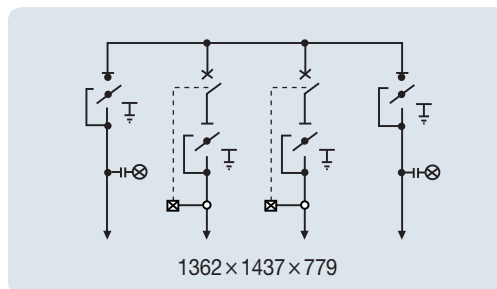

36kV CB Feeder Non-Extensible RMU

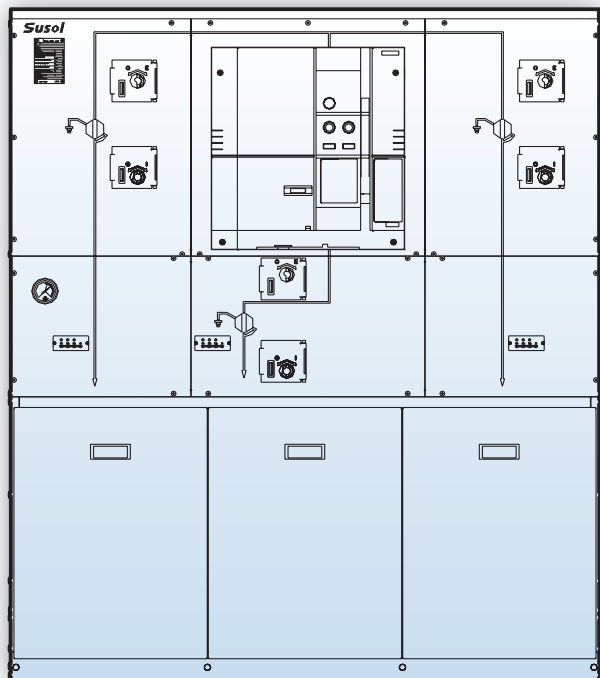


- Consists of two circuit LBS and one circuit Switch-Fuse in a single chamber
- Protects equipment using Switch Fuse
- Complete Sealing System
- Application of high grade OCR
- Increase durability through S/S application
- L: Load break switch
- C: Vacuum circuit breaker


Applicable type

[W×H×D, mm]


RC (1R1C)

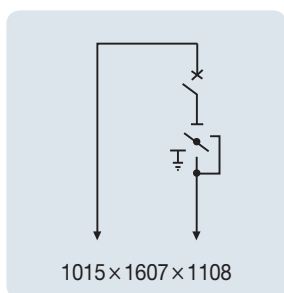


LC (1L1C)

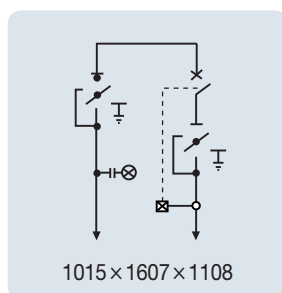


LCL (2L1C)

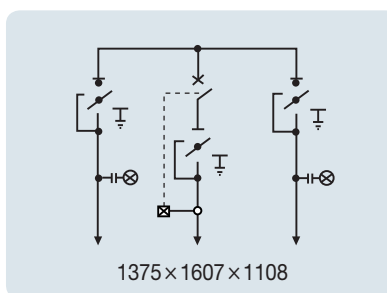

LLCL (3L1C)

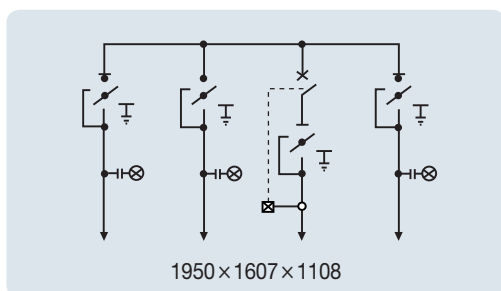


LCCL (2L2C)

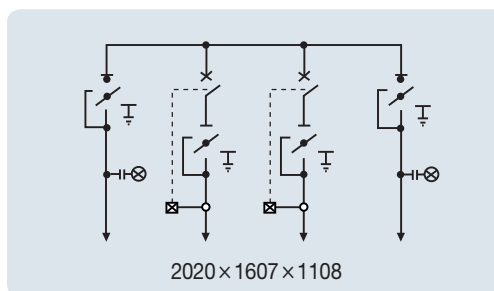

Susol RMU

12/17.5/24kV Switch-Fuse Feeder Non-Extensible RMU

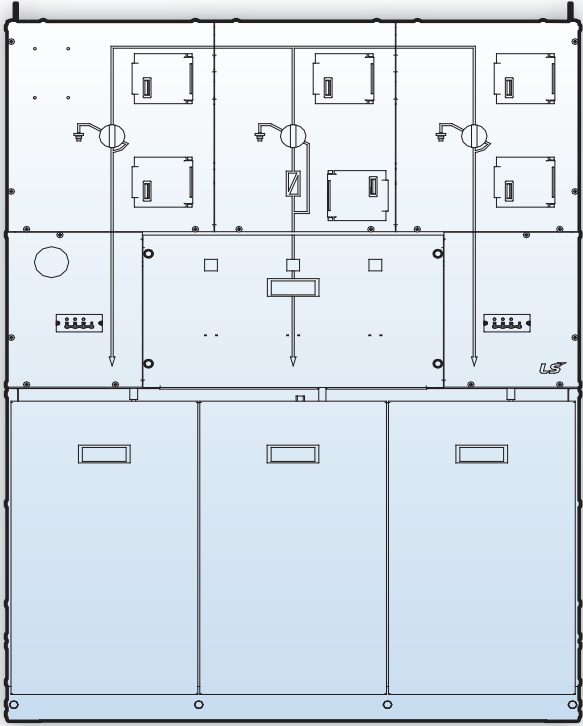


- Consists of two circuit LBS and one circuit Switch-Fuse in a single chamber
- Protects equipment using Switch Fuse
- Complete Sealing System
- Increase durability through S/S application
- L: Load break switch
- C: Vacuum circuit breaker


Applicable type

[W×H×D, mm]


RF (1R1F)

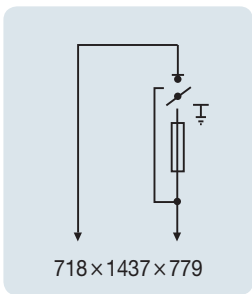


LF (1L1F)

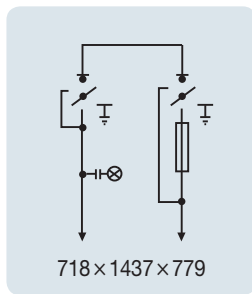


LFL (2L1F)

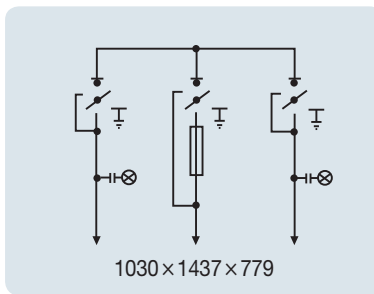


LLFL (3L1F)

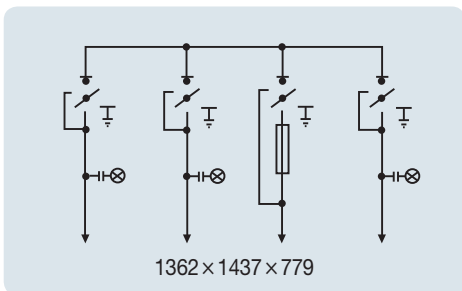

LFFL (2L2F)

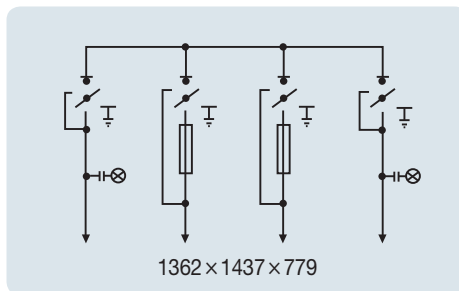

12/17.5/24kV LBS Feeder Non-Extensible RMU

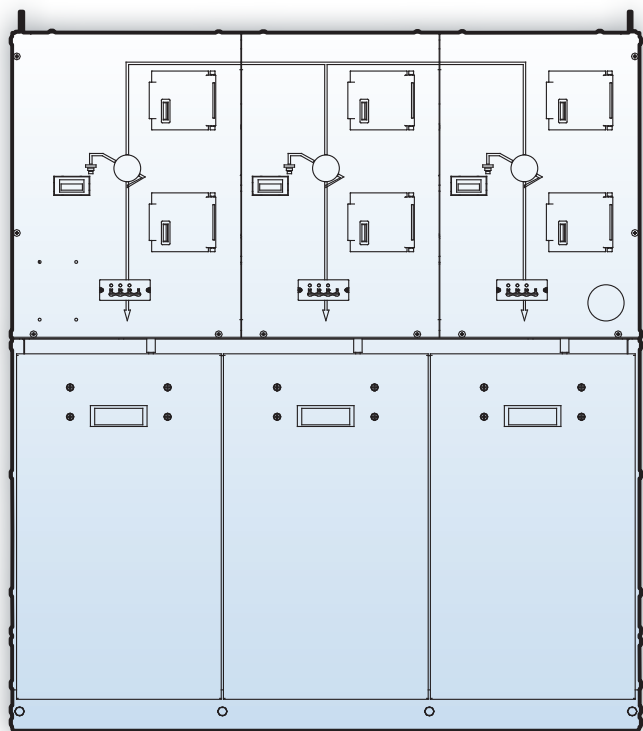


- Complete Sealing System
- Increase durability through S/S application
- L: Load break switch


Applicable type

[W×H×D, mm]


LR (1L1R)

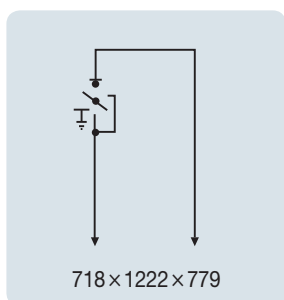

LLL (3L)

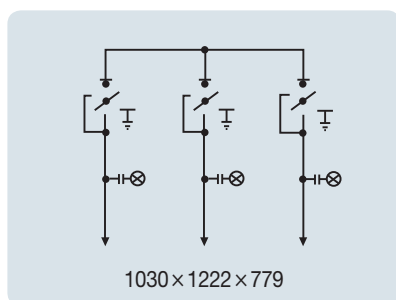

LLLL (4L)

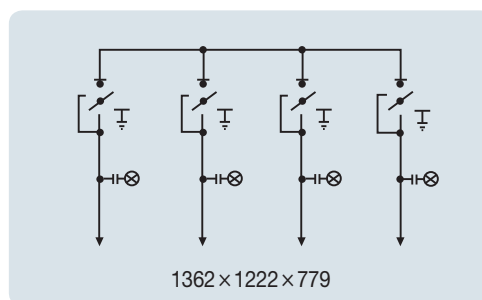

Susol RMU

Extensible RMU

- Protects equipment using Switch Fuse
- Complete Sealing System
- Increase durability through S/S application
- L: Load break switch
- C: Vacuum circuit breaker



12/17.5/24kV Extensible RMU

[W×H×D, mm]

R	L	C	F
411 × 1456 × 779	411 × 1456 × 779	521 × 1456 × 779	521 × 1456 × 779

Cast Resin Transformer

Characteristics

- Applicable to wind power plant
- Superior shock voltage (125kV BIL)
- Strengthening seismic performance (scale 8.0)
- Low noise and high efficiency
- Up to 36kV voltage and 25MVA capacity



Ratings

Division		Standard specification				
Installation place		Indoor(Enclosure needed for outdoor)				
Applicable standard		KS C 4311				
Frequency		60				
Insulation kind		F type				
Coil temperature rise		100K				
1st rated voltage	kA	22.9kV			6.6 or 3.3kV	
1st tap voltage	V	F23900-R22900-21900-20900-19900			F6900-R6600-6300-6000-5700 F3450-R3300-3150-3000-2850	
2nd rated voltage		6.6 or 3.3kV	380-220V	220-110V	380-220V	220-110V
Phase		3P	3P	1P	3P	1P
Angular displacement		Dd0	Dyn11	-	Dyn11	-
Impulse withstand voltage	(1st/ 2nd) kV	95 / 40(20) 125 / 40(20)	95 / - 125 / -	95 / - 125 / -	40(20) / -	40(20) / -
Normal frequency withstand voltage	(1st/ 2nd) kV	50 / 20(10)	50 / 3	50 / 3	20(10) / 3	20(10) / 3
Rated capacity	kVA		100	100	100	100
			200	200	200	200
			300	300	300	300
			400	400	400	400
		500	500	500	500	500
		600	600	600	600	600
		750	750	750	750	750
		1000	1000	1000	1000	1000
		1250	1250		1250	
		1500	1500		1500	
		2000	2000		2000	
		2500	2500		2500	
		3000	3000		3000	
		4000				
5000						
6000						
7500						
8500						
10000						

* The above descriptions are standard specifications, but other specifications are available according to orders. (-36kV, -25MVA)

* The () in the impulse withstand voltage and the normal frequency withstand voltage is insulation classes for 3.6kV.


Cast Resin Transformer

Standard components



1st terminal

This is connected to the inlet cable, so check the bolt tightening condition before inputting power.

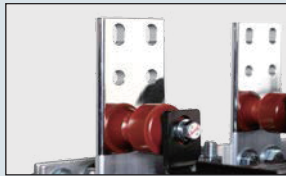

2nd terminal

This is connected to the flexible bus and cable in the 2nd load side, so check the bolt tightening condition before inputting power.




Grounding terminal

This is attached on the bottom frame, so check the grounding condition before inputting power.



Tap change terminal

To change the 2nd voltage of the transformer, turn off the tap and adjust the tap terminal.

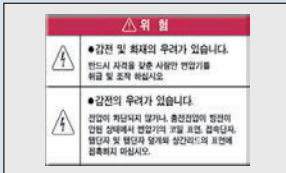


Danger mark

Touching the coil surface during operation of the transformer can cause danger, so never touch it during operation



Lifting eye

This is attached on the top of the top frame, so use it to lift the transformer.

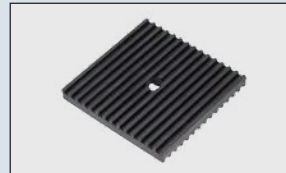

Cushion rubber




Insert cushion rubber between the transformer bed frame and the ground to prevent iron core vibrations from transferring to the floor during operation to reduce noises.



Tap change terminal cover Insulate

The conductor part of the tap terminals to secure an insulation distance and improve safety.


Dimensions

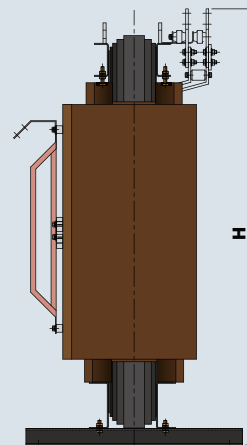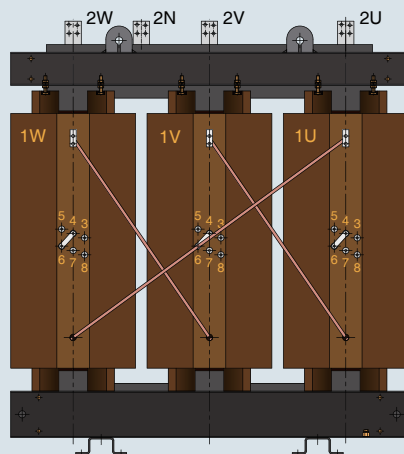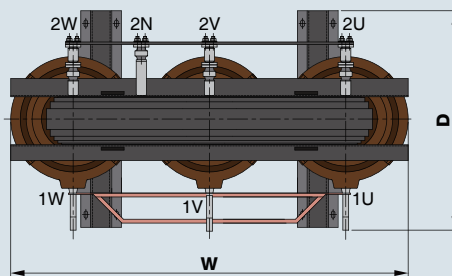

Oil-Immersed Transformer

Characteristics

- Applicable to solar/wind power plant
- Mobile transformer (Connection type)
- Quality control through multiple tests
- Various accessories available
- Up to 72kV voltage and 80MVA capacity

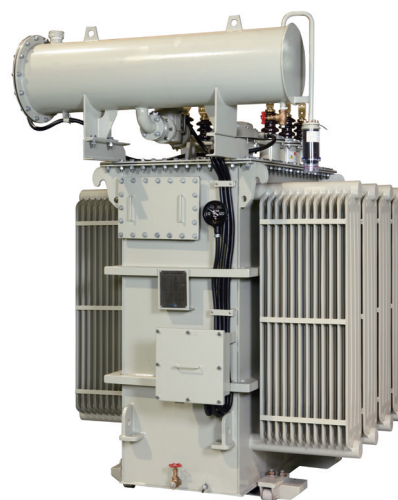


LS transformer adopts a structure that can reduce the loss, and it ensures the electrical stability of the transformer by selecting the high efficiency and the optimum insulation structure. Also, it realizes the optimum cooling system, seismic condition considering the short-circuit mechanical power and external shock occurred in the transformer in case of system failure. And strong design of structure that can endure the impact during transportation.

Ratings

Applicable specifications		
Applicable standard		IEC 60076 / ANSI(IEEE) C57
Installation location		Outdoor / Indoor
Frequency		50 / 60Hz
Thermal class		A type 105°C
Winding temp. rising		65K
Oil Temp. rising		60K
Cooling method	Internal	ON / OF / OD
	External	AN / AF / WF
Voltage		Up to 69kV
Capacity (MVA)		Up to 80MVA
Conductor		Al or Cu

Oil-Immersed Transformer

Standard components

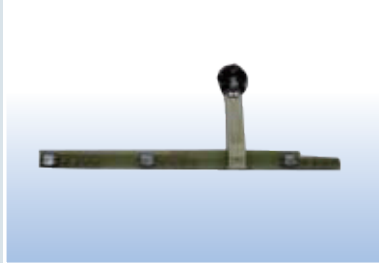

Tap changer

The tap changer is a device for adjusting the voltage, No load tap changer and on-load tap-changer, etc. use.



Breather

Breather is used to prevent deterioration and aging of insulating oil. It consists of two containers filled with moisture absorbent and insulating oil.

* 3000kVA or less is not required.



Winding temperature indicator

Winding temperature indicator do not directly measure the winding temperature but indirectly measure it using a current transformer (BCT) and a temperature detector It can be used by alarm or break contact.



Oil temperature indicator

Oil temperature indicator is located in the protective pipe attached to the transformer enclosure and indicates the temperature of oil level of the top of transformer during operation. It can be used by alarm or break contact.



Oil level gauge

This displays the height of the oil level of the tank and the conservator.



Buchholz relay

Buchholz relay is installed between the pipes connecting the transformer and the controller. Alarm and trip signal is generated by detecting changes of gas and flow rate when any internal error occurs.



Pressure relief device

Pressure relief device releases the pressure generated by an accident of the transformer to the outside air, and is attached to the cover of the transformer enclosure. It has a alarm and a break contact.



Sudden pressure relay

Sudden pressure relay is operated at the time of accident such as short circuit and flash over of the transformer, and has alarm and trip contact.





Conservator


It is responsible for contraction and expansion of insulation oil due to changes in oil temperature.


* 3000kVA or less is not required.

Memo



Memo







Safety Instructions

- For your safety, please read user's manual thoroughly before operating.
- Contact the nearest authorized service facility for examination, repair, or adjustment.
- Please contact qualified service technician when you need maintenance. Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.



- According to The WEEE Directive, please do not discard the device with your household waste.